

DESCRIPTION

The MP3332 is a dual-channels flash LED driver with very compact package, high efficiency for high-resolution camera phones to improve image and video quality in low light environment. The synchronous boost converter operates in 1/2/3/4MHz to provide an optimized solution for smaller PCB space and higher efficiency.

The MP3332 features standard I²C interface, dual LED channels, rich protection modes and high power density and performances. The MP3332 supports flash/assist light/torch/indicator/5V DC modes.

The cathodes of the dual flash LED are referenced to GND for better layout to improve thermal performance. It is available in WLCSP16-1.65X1.65mm package.

ELECTRICAL SPECIFICATIONS

Parameter	Symbol	Value	Units
Input Voltage	V _{IN}	2.7-5.5	V
Output Voltage	V _{out}	<5.5	V
LED channel		2	
LED Current/Ch	I _{LED}	1500	mA

FEATURES

- 2.7V~5.5V input voltage
- Dual-channels, 1.5A/ch flash current with +/-7% accuracy
- 1/2/3/4MHz selectable switching frequency and switching frequency fold-back function
- 400kHz I²C compatible interface
- Standby/Flash/Assist/Torch/Indicator/5V DC modes

Flash Mode:

Up to 1.5A programmable current with +/-7% accuracy for each LED

Assist/Torch Mode:

Up to 500mA/ch programmable current with +/-7% accuracy

Indicator Mode:

Work in 31.5kHz PWM operation with 2/16, 3/16, 4/16, 5/16 duty cycle
128ms/256ms/512ms selectable blinking time

5V DC Mode:

Constant 5V DC Output


- External Torch/Strobe Pin
- LED forward voltage balance to improve efficiency
- 1A to 4.2A programmable input DC current limit protection
- Low battery voltage protection
- LED short/open protection
- Over voltage protection
- Over temperature protection
- Input under voltage lockout protection
- Available in WLCSP16-1.65X1.65mm

APPLICATIONS

- LED Flash Application For Smart Phone
- Camera For Tablets
- Digital Still Camera

All MPS parts are lead-free, halogen free, and adhere to the RoHS directive. For MPS green status, please visit MPS website under Quality Assurance. "MPS" and "The Future of Analog IC Technology" are Registered Trademarks of Monolithic Power Systems, Inc.


EV3332-C-00A EVALUATION BOARD

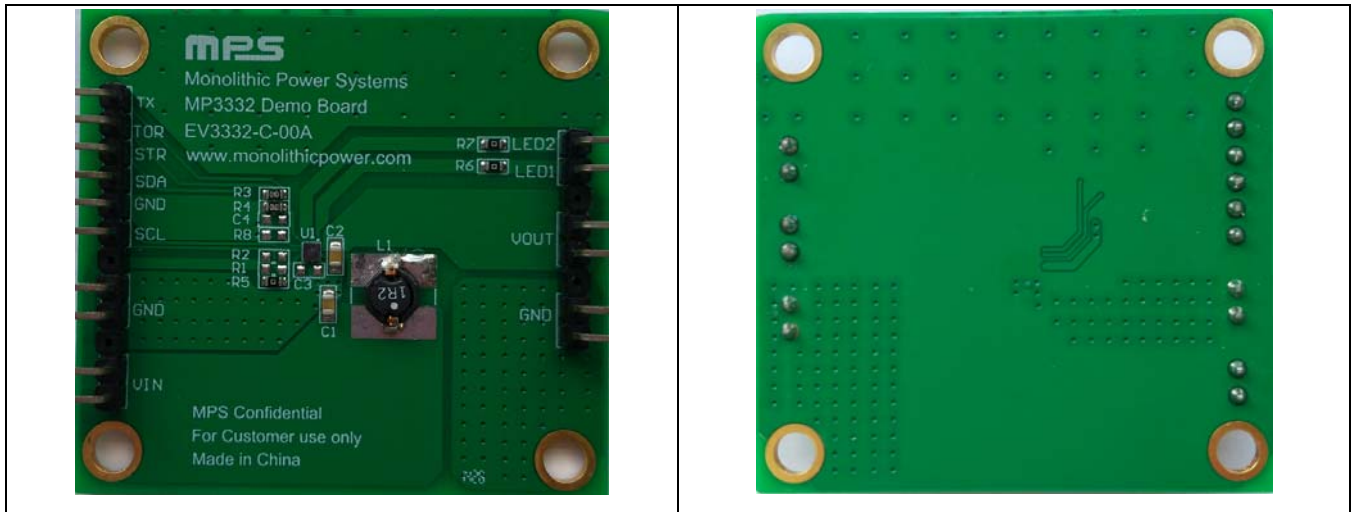

(L x W x H) 5.0cm x 4.6cm x 3.0cm

Board Number	MPS IC Number
EV3332-C-00A	MP3332GC

EVALUATION BOARD SCHEMATIC

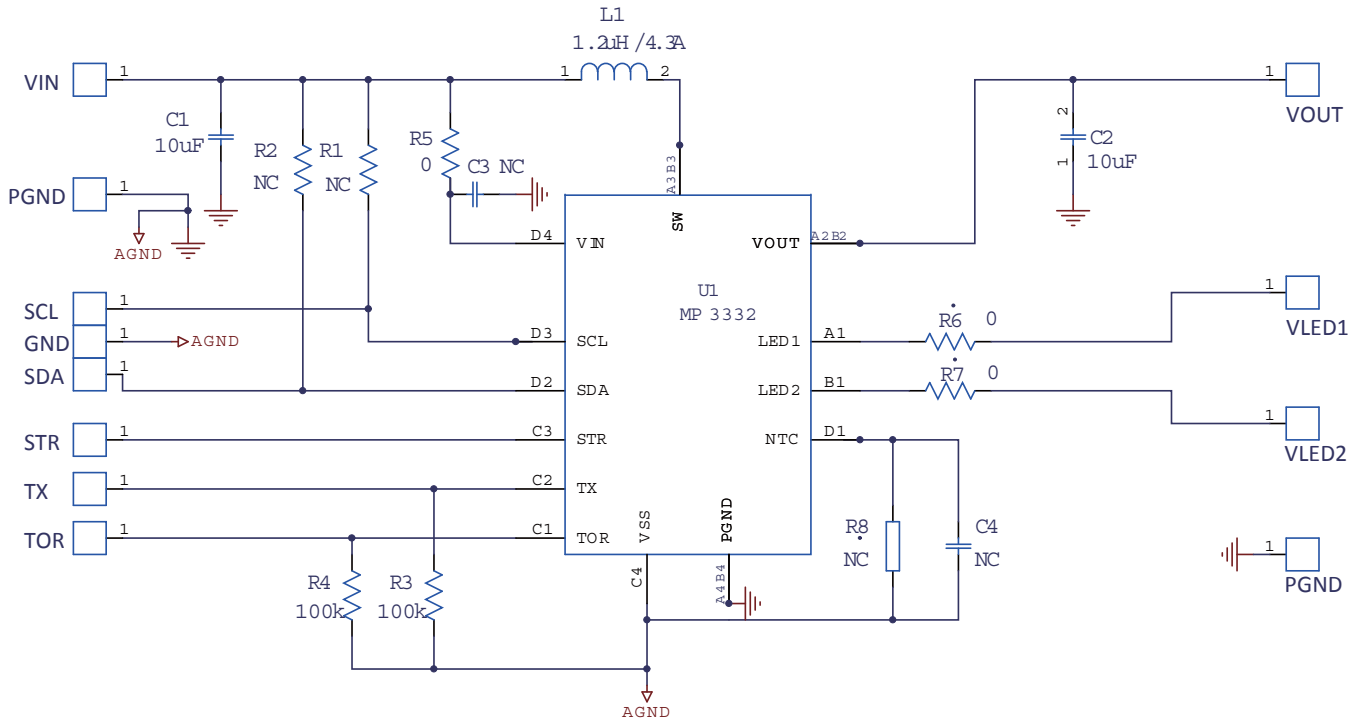

EV3332-C-00A BILL OF MATERIALS


Qty	Ref	Value	Description	Package	Manufacturer	Part Number
2	R3,R4	100k	res,5%	0603	Yageo	RC0603JR-07100KL
3	R6,R7,R5	0	res,1%	0603	Yageo	RC0603FR-070RL
3	R1,R2, R8	NC		0603		
2	C1,C2	10uF	Ceramic Capacitor,10V,X5R	0805	muRata	GRM21BR61A106KE19L
2	C3, C4	NC				
1	L1	1.2uH	Inductor, DCR=25m, IDC=4.3A	SMD	TDK	LTF-5022T-1R2N4R2
1	U1			CSP16/1.65*1.65	MPS	MP3332

EVB TEST RESULTS


Performance waveforms are tested on the evaluation board.

V_{IN} = 3.6V, 1*LEDs, FL_TIM=100ms, L = 1.2μH, T_A = 25°C, unless otherwise noted.


Torch/Assist Mode
LED_EN enable

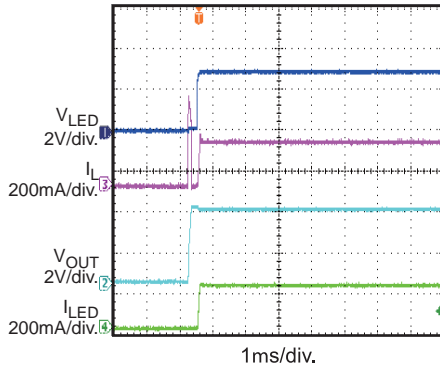


Torch/Assist Mode
LED_EN disable

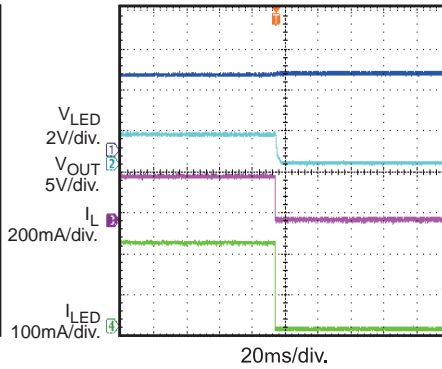


Indicator Mode
ILED Duty=2/16

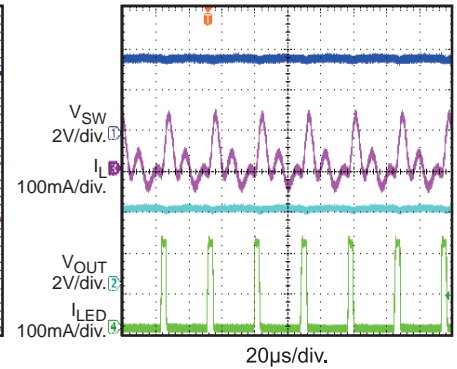


Blinking Mode and Indicator Mode
Blinking Time=128ms

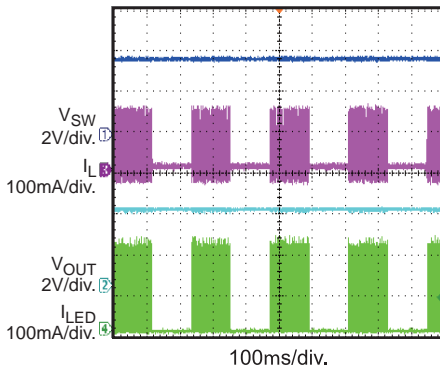


Flash Mode
flash time=100ms

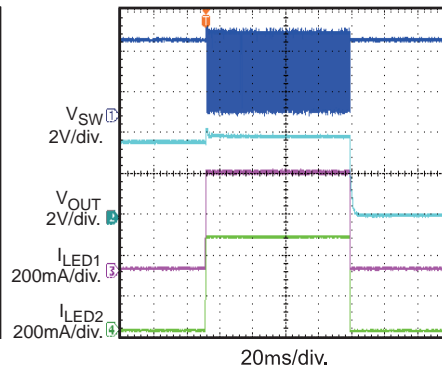


5V_DC Mode
With light load

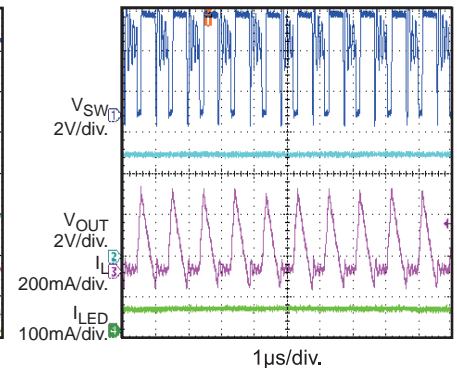


Torch/Assist Mode to Flash Mode

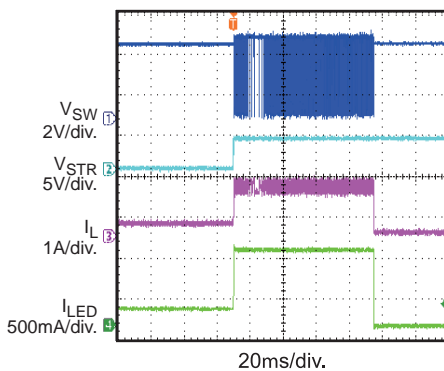

TX pin is high
In flash Mode

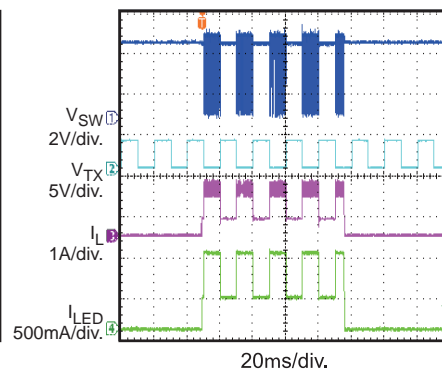


Load Balancing
from disable this function to enable

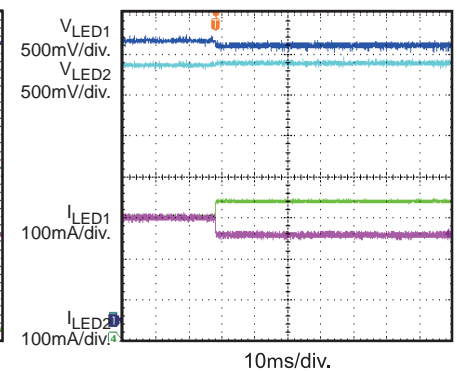


EVB TEST RESULTS (continued)

V_{IN} = 3.6V, 1*LEDs, FL_TIM=100ms, L = 1.2μH, T_A = 25°C, unless otherwise noted.


**Short one channel
when working**

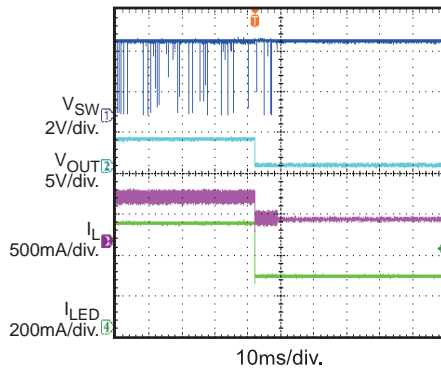

**Open one string
Protection
when working**

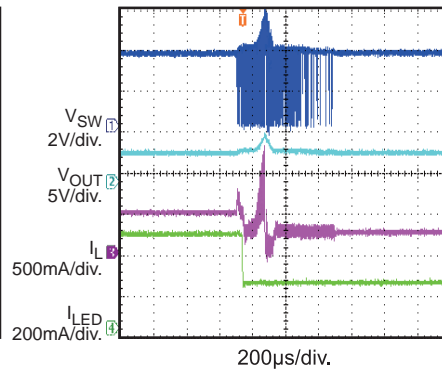


**Vout to GND short
Protection**

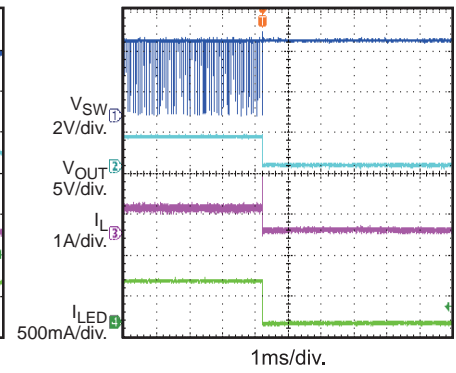


Thermal Protection

In flash mode,
LED_OTAD=1

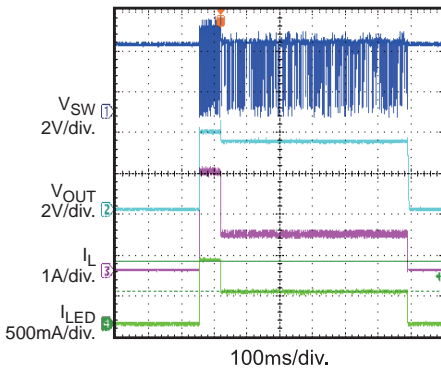

NTC Detection

Set NTC_WD=0.88V

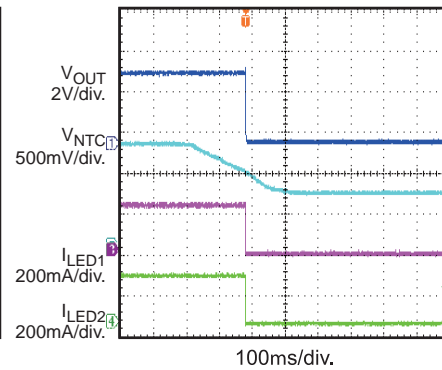

PRINTED CIRCUIT BOARD LAYOUT

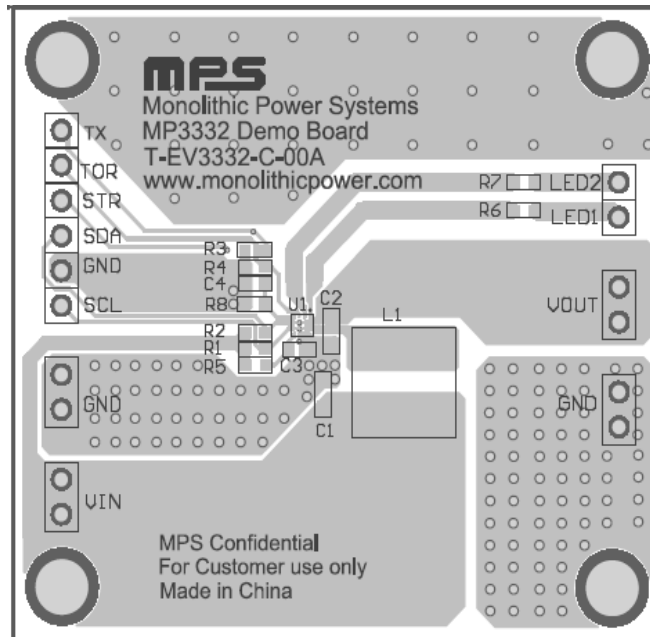


Figure 1—Top Layer


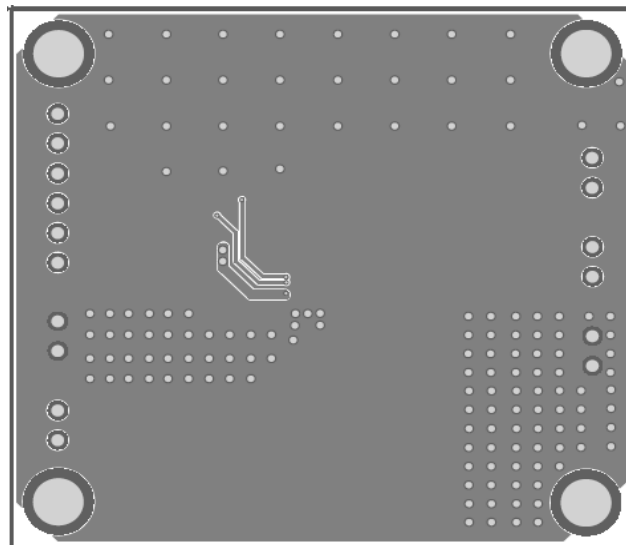


Figure 2—Bottom Layer

QUICK START GUIDE

1. Connect the positive and negative terminals of the power supply (2.7V ~ 5.5V) to the VIN and GND pins on the EV board, respectively.
2. Connect the positive and negative terminals of the LED to the LED terminal and GND on the EV board, respectively.
3. Please connect SCL, SDA and GND of EV board to SCL, SDA and GND of a programmable kit with I²C interface, respectively. I²C is active only when Vin powers on.

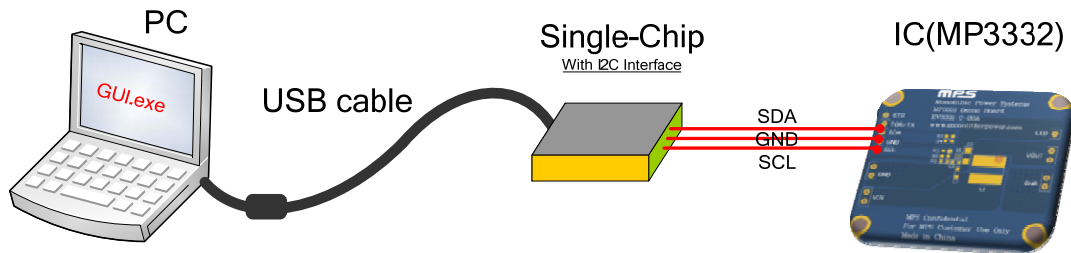

4. When work in Torch mode, please pull torch terminal to high. When work in flash mode with hardware level or edge sensitive, please give a level or pulse signal to STR pin. It is OK that STR is float or connected to a high/level if trigger flash with software.

NOTICE: The information in this document is subject to change without notice. Users should warrant and guarantee that third party Intellectual Property rights are not infringed upon when integrating MPS products into any application. MPS will not assume any legal responsibility for any said applications.