

DESCRIPTION

The EVHFC0500-S-00A Evaluation Board is designed to demonstrate the capabilities of HFC0500. HFC0500 is a fixed-frequency current mode controller with built-in slope compensation. At light load condition, it freezes the peak current and reduces its switching frequency down to 25kHz. As a result, it offers excellent efficiency at light load. At very light load, the controller enters burst mode. So very low standby power consumption can be achieved.

The EVHFC0500-S-00A is designed for TV, monitor and it typically drives 39W with dual outputs. One is 16V_{TYP}, 1.5A load and the other is 5V_{TYP}, 3A load from 90V_{AC}/60Hz to 265V_{AC}/50Hz.

The EVHFC0500-S-00A has excellent efficiency and meets 2kV IEC61000-4-5 surge immunity and EN55022 conducted EMI requirements. HFC0500 features variable protections like Thermal Shutdown (TSD), Vcc under Voltage Lockout (UVLO), Over Load Protection (OLP), Over Voltage Protection (OVP), Over Temperature Protection (OTP) and Brown-Out Protection.

HFC0500 is available in the SOIC8-7A package.

ELECTRICAL SPECIFICATION

| Parameter | Symbol | Value | Units |
|------------------|-------------------|----------|-----------------|
| Supply Voltage | V _{AC} | 90 - 265 | V _{AC} |
| Output Voltage 1 | V _{OUT1} | 5.0 | V |
| Output Current 1 | I _{OUT1} | 3.0 | A |
| Output Voltage 2 | V _{OUT2} | 16.0 | V |
| Output Current 2 | I _{OUT2} | 1.5 | A |

FEATURES

- Fixed-frequency current mode control operation with built-in slope compensation.
- Frequency Foldback down to 25kHz at light load condition
- Burst Mode for low standby power consumption
- Frequency jittering for a reduced EMI signature
- X-CAP discharge function
- Internal high voltage current source
- VCC Under Voltage Lockout with Hysteresis (UVLO)
- Brown-Out Protection on HV pin
- Over Load Protection with programmable delay
- Latch-off for external Over Voltage Protection(OVP) and Over Temperature Protection(OTP) on TIMER Pin
- Thermal Shutdown (auto restart with hysteresis)
- Short Circuit Protection
- Programmable soft start


APPLICATIONS

- TV and Monitors.

All MPS parts are lead-free and adhere to the RoHS directive. For MPS green status, please visit MPS website under Quality Assurance.

"MPS" and "The Future of Analog IC Technology", are Registered Trademarks of Monolithic Power Systems, Inc..


EVHFC0500-S-00A EVALUATION BOARD

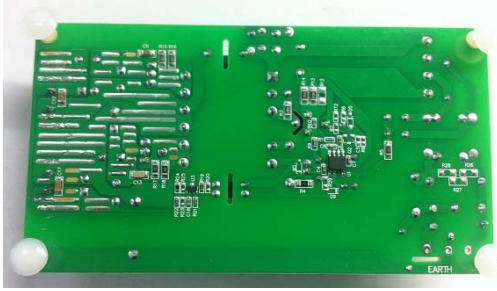

(L x W x H) 130mm x 70mm x 30mm

| Board Number | MPS IC Number |
|-----------------|---------------|
| EVHFC0500-S-00A | HFC0500GS |

VALUATION BOARD SCHEMATIC

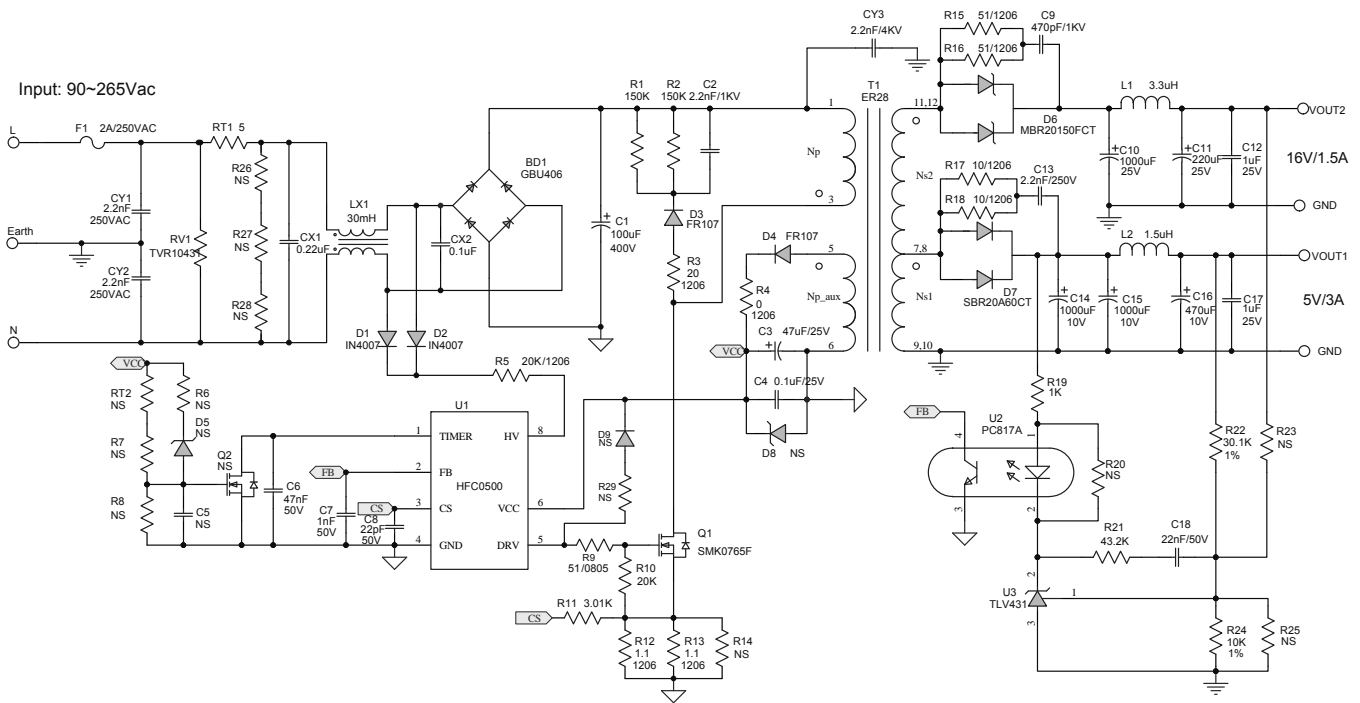

EVHFC0500-S-00A BILL OF MATERIALS

| Qty | Ref | Value | Description | Package | Manufacturer | Part Number |
|-----|------------------|--------------|---------------------------------|--------------|--------------|--------------------|
| 1 | BD1 | GBU406 | Diode;600V;4A | DIP | Diodes | GBU406 |
| 1 | C1 | 100 μ F | Electrolytic Capacitor; 400V | DIP | Jianghai | CD263-400V100 |
| 1 | C2 | 2.2nF | Capacitor;1000V | DIP | Any | |
| 1 | C3 | 47 μ F | Electrolytic Capacitor; 25V | DIP | Jianghai | CD28L-25V47 |
| 1 | C4 | 0.1 μ F | Ceramic Capacitor; 25V;X7R | 0603 | Yageo | CC0603KRX7R8BB104 |
| 0 | C5 | NS | | | | |
| 1 | C6 | 47nF | Ceramic Capacitor; 50V;X7R | 0603 | muRata | GRM188R71H473KA61D |
| 1 | C7 | 1nF | Ceramic Capacitor; 50V;X7R | 0603 | muRata | GRM188R71H102KA01D |
| 1 | C8 | 22pF | Ceramic Capacitor; 50V;C0G | 0603 | muRata | GRM1885C1H220JA01D |
| 1 | C9 | 470pF | Ceramic Capacitor; 1000V;U2J | 1206 | muRata | GRM31B7U3A471JW31L |
| 1 | C10 | 1000 μ F | Electrolytic Capacitor; 25V; | DIP | Panasonic | |
| 1 | C11 | 220 μ F | Electrolytic Capacitor; 25V; | DIP | Jianghai | CD287-25V220 |
| 2 | C12, C17 | 1 μ F | Ceramic Capacitor; 25V;X7R | 1206 | muRata | GRM31MR71E105KA01 |
| 1 | C13 | 2.2nF | Ceramic Capacitor; 250V;X7R | 1206 | Any | |
| 2 | C14, C15 | 1000 μ F | Electrolytic Capacitor; 10V | DIP | Jianghai | CD287-10V1000 |
| 1 | C16 | 470 μ F | Electrolytic Capacitor; 10V | DIP | Jianghai | CD287-10V470 |
| 1 | C18 | 22nF | Ceramic Capacitor; 50V;X7R | 0603 | muRata | GRM188R71H223KA01D |
| 1 | CX1 | 0.22 μ F | Film Capacitor; 275V;10% | DIP | Carli | PX224K3ID49L270D9R |
| 1 | CX2 | 0.1 μ F | Film Capacitor; 275V;10% | DIP | Carli | PX104K3IC39L270D9R |
| 2 | CY1, CY2 | 2.2nF | Y Capacitor; 250V;20% | DIP | Hongke | JY09F222ML72N |
| 1 | CY3 | 2.2nF | Capacitor;4000V;20% | DIP | Hongke | JN12E222MY02N |
| 2 | D1, D2 | 1N4007 | Diode;1000V;1A | DO-41 | Diodes | 1N4007 |
| 2 | D3,D 4 | FR107 | Diode;1000V;1A | DO-41 | Diodes | FR107 |
| 0 | D5, D8, D9 | NS | | | | |
| 1 | D6 | MBR20150FCT | Diode;150V;20A | TO- 220AB | PANJIT | MBR20150FCT |

EVHFC0500-S-00A BILL OF MATERIALS (continued)

| Qty | Ref | Value | Description | Package | Manufacturer | Part Number |
|-----|--|-------------|---------------------------------------|------------|--------------------|--------------------------|
| 1 | D7 | SBR20A60CT | Diode;60V;20A | TO-220AB | Diodes | SBR20A60CT |
| 1 | F1 | SS-5-2A | Fuse;250V;2A | DIP | COOPER BUSSMANN | SS-5-2A |
| 1 | L1 | 3.3 μ H | Inductor;3.3 μ H; 25mOhm;2.66A | DIP | TOKO | 8RHB2-#822LY-3R3M |
| 1 | L2 | 1.5 μ H | Inductor;1.5 μ H; 10 mOhm;7A | DIP | Würth | 744732015 |
| 1 | LX1 | 30mH | Common Inductor; 1.5A; | DIP | Emei | TP4M30-02 |
| 1 | Q1 | SMK0765F | Mosfet;650V;7A | TO-220F-3L | AUK | SMK0765F |
| 0 | Q2 | NS | | | | |
| 2 | R1, R2 | 150k | Resistor;1%;1W | DIP | Any | |
| 1 | R3 | 20 Ω | Film Resistor; 5%;1/4W | 1206 | Royalohm | 1206J0200T5E |
| 1 | R4 | 0 | Resistor;5% | 1206 | Yageo | RC12065JR-070RL |
| 1 | R5 | 20k | Film Resistor; 5%;1/4W | 1206 | LIZ | CR1206J40203G |
| 1 | R9 | 51 | Resistor; 5%;1/8W; | 0805 | Yageo | RC0805JR-0751RL |
| 1 | R10 | 20k | Film Resistor; 5%; | 0603 | | 653610846CR03T03705NJ20K |
| 1 | R11 | 3.01k | Film Resistor;1% | 0603 | Yageo | RC0603FR-073K01L |
| 2 | R13, R14 | 1.1 | Film Resistor;1% | 1206 | Yageo | RC1206FR-071R1L |
| 2 | R15, R16 | 51 | Film Resistor;1% | 1206 | Yageo | RC1206FR-0751RL |
| 2 | R17, R18 | 10 | Film Resistor; 5%;1/4 | 1206 | Yageo | CR1206JR-0710R |
| 1 | R19 | 1k | Film Resistor;5% | 0603 | | 0603SAJ0102T5E |
| 1 | R21 | 43.2k | Film Resistor; 1%; | 0603 | Yageo | RC0603FR-0743K2L |
| 1 | R22 | 30.1k | Film Resistor; 1%; | 0603 | Yageo | RC0603FR-0730K1L |
| 1 | R24 | 10k | Film Resistor; 1%; | 0603 | Yageo | RC0603FR-0710KL |
| 0 | R6, R7, R8, R14, R20, R23, R25, R26, R27, R28, R29 | NS | | | | |

EVHFC0500-S-00A BILL OF MATERIALS (continued)


| Qty | Ref | Value | Description | Package | Manufacturer | Part Number |
|-----|-----|----------|--|----------|---------------------|--------------|
| 1 | RT1 | 5 | Resistor, NTC | DIP | Xingshun | 5D2-10 |
| 1 | RT2 | NS | | | | |
| 1 | RV1 | TVR10431 | Varistor | DIP | TKS | TVR10431KSY |
| 1 | T1 | | Transformer;894μH; Np:Naux:Ns1:Ns2 =64:10:4:8 | ER28 | Emei ⁽¹⁾ | FX0312 |
| 1 | U1 | HFC0500 | Fixed Frequency Flyback Controller with ultra low Power consumption | SOIC8-7A | MPS | HFC0500, R2 |
| 1 | U2 | PC817A | Photocoupler; 1-Channel | DIP | Yiguang | PC817A |
| 1 | U3 | TLV431 | Shunt Regulator, 1.24V | SOT23 | Guoda | TLV431ACDBZR |

Note:


1. The website is www.emeigroup.com

TRANSFORMER STRUCTURE

Electrical Diagram

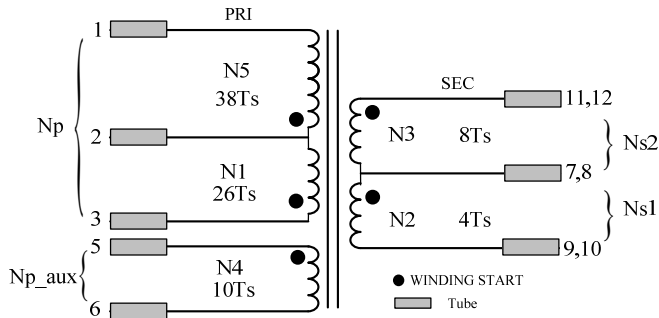

Winding Diagram

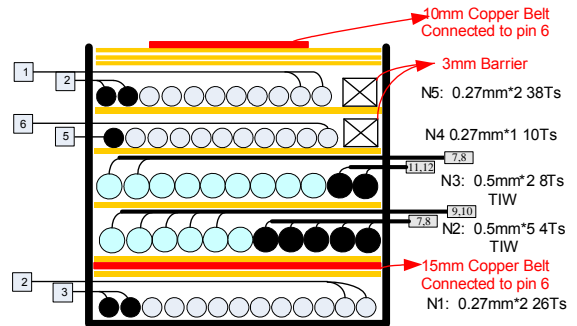


Notes:

1. Round one layer copper outside of the N1. And make sure the head and the tail of the copper and connected, then connected the copper to Ground Pin(Pin6).
2. Round one layer copper outside of the core air gap. And make sure the head and the tail of the copper and connected, then connected the copper to Ground Pin(Pin6).
3. Left 3mm barrier for N4 and N5 turns..

Pin Definition of Bobbin

Pin Out

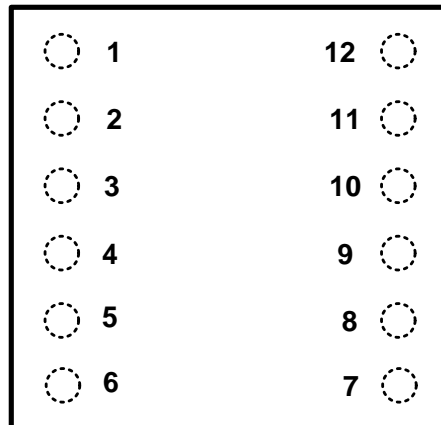

View from the top

Table 1—Electrical Characteristic


| Parameter | Condition | Value |
|--------------------|----------------|--------------------|
| Primary Inductance | Lp(1-3) | 894uH±5% |
| Core | | EER28 |
| Bobbin | | EER28 |
| Core Material | | PC40 or equivalent |
| Turn Ratio | N1:N2:N3:N4:N5 | 26:4:8:10:38 |

Table 2—Winding Specification


| Tape Turns | Winding No. | Start&End | Wire Diameter (mm) | Turns |
|------------|-------------|-----------|--------------------|-------|
| 1 | N1 | 3→2 | 0.27×2 | 26 |
| 1 | N2 | 7,8→9,10 | 0.5×5 TIW | 4 |
| 1 | N3 | 11,12→7,8 | 0.5×2 TIW | 8 |
| 1 | N4 | 5→6 | 0.27*1 | 10 |
| 3 | N5 | 2→1 | 0.27×2 | 38 |

EV BOARD TEST RESULTS

Efficiency vs. Load Current

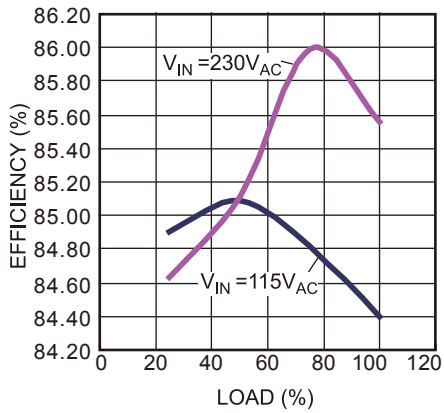

No Load Power Consumption vs. Input Voltage

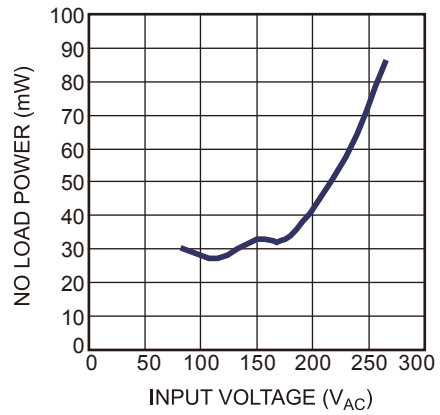

Load Regulation


| Load condition | | Input Voltage | | | |
|----------------|------|-------------------|--------|--------------------|--------|
| | | 90V _{AC} | | 265V _{AC} | |
| 5V | 16V | 5V | 16V | 5V | 16V |
| 0.3A | 0.3A | 5.03V | 15.43V | 5.03V | 15.42V |
| 0.3A | 1.5A | 5.03V | 15.02V | 5.03V | 15.02V |
| 3A | 0.3A | 5.01V | 16.75V | 5.01V | 16.69V |
| 3A | 1.5A | 5.01V | 15.96V | 5.01V | 15.76V |

EVB TEST RESULTS


Performance waveforms are tested on the evaluation board.

$V_{IN} = 265V_{AC}$, $V_{OUT1} = 5V$, $V_{OUT2} = 16V$, full load, $T_A = 25^{\circ}C$, unless otherwise noted.


Stress
Steady State, Mosfet

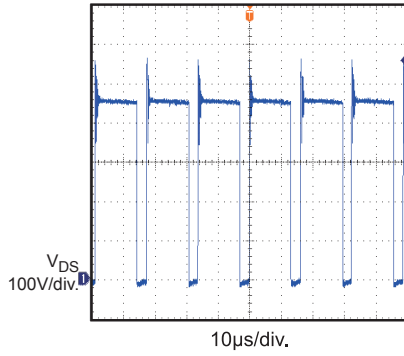


Stress
Steady State,
Output 1 Diode

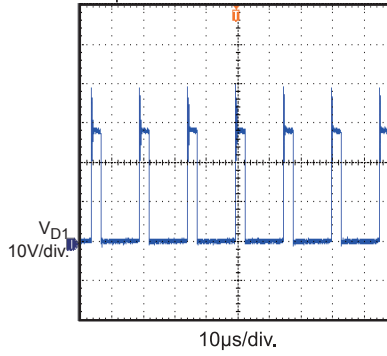


Stress
Steady State,
Output 2 Diode

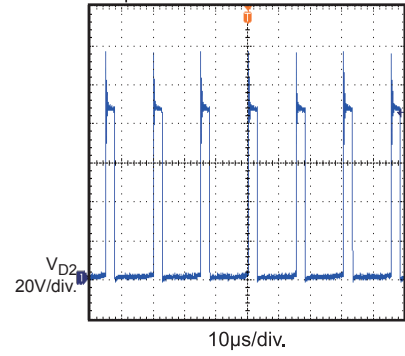


Stress
OVP, Mosfet

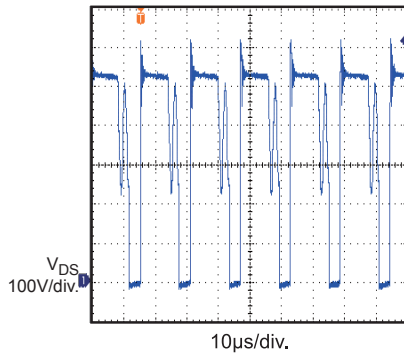


Stress
OVP, Output 1 Diode

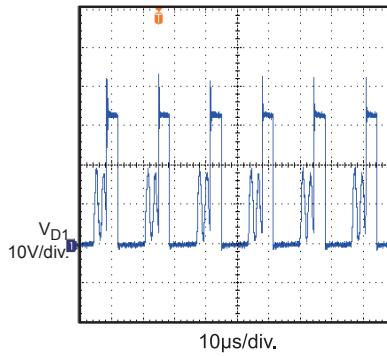


Stress
OVP, Output 1 Diode

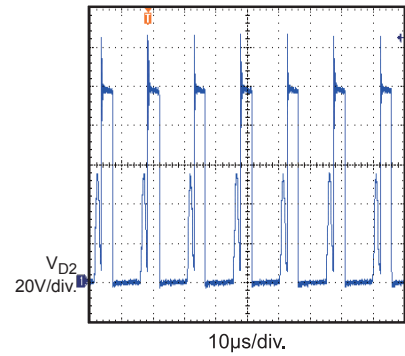


SCP
 $V_{IN}=90V_{AC}$

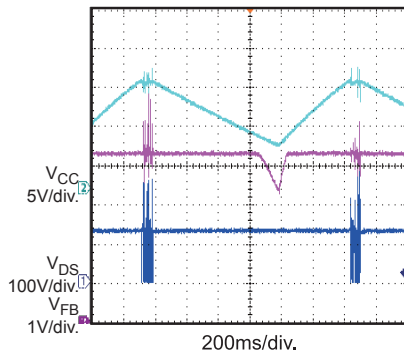

SCP
 $V_{IN}=230V_{AC}$

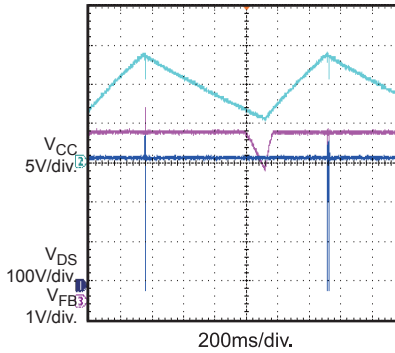










OVP
 $V_{IN}=90V_{AC}$

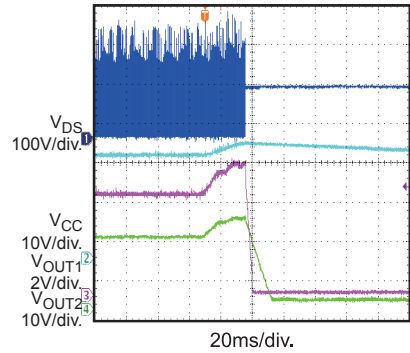

EVB TEST RESULTS (continued)

Performance waveforms are tested on the evaluation board.

$V_{OUT1} = 5V$, $V_{OUT2} = 16V$, full load, $T_A = 25^\circ C$, unless otherwise noted.

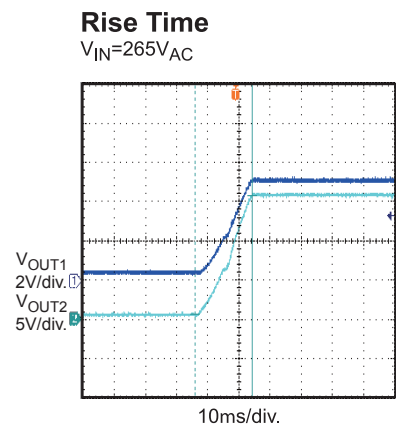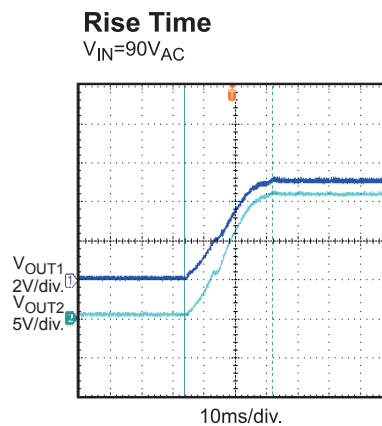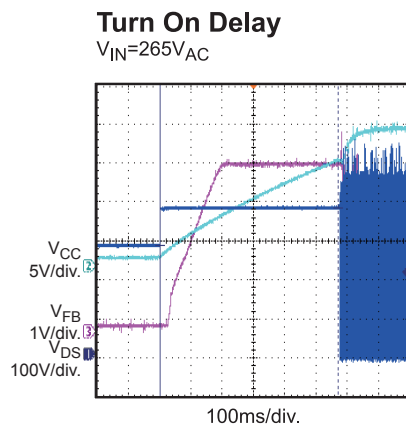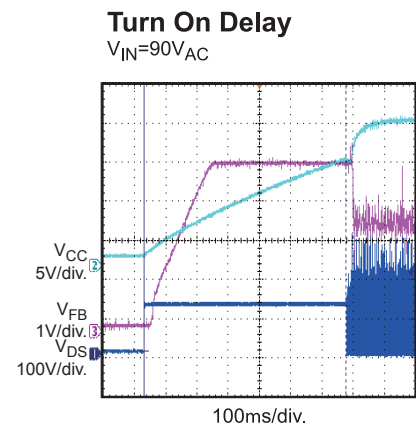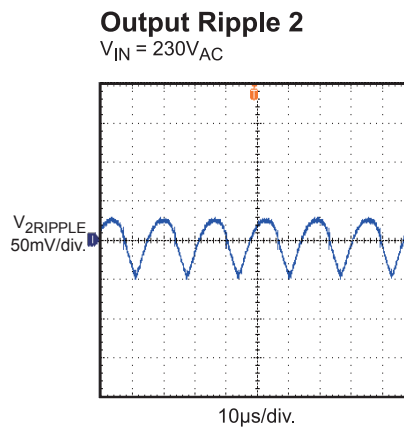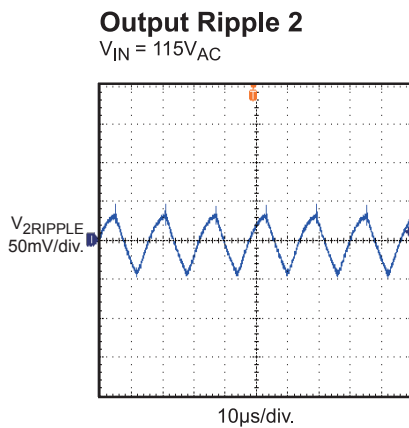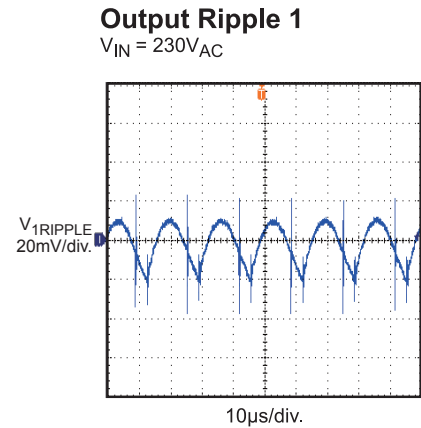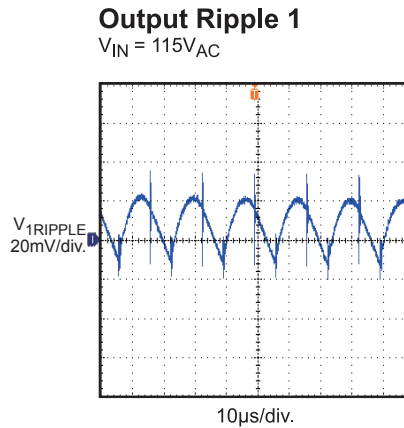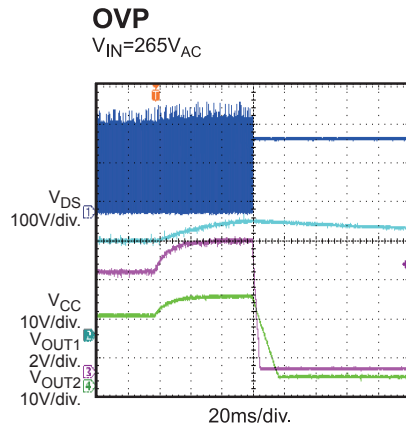


EVB TEST RESULTS *(continued)*


Performance waveforms are tested on the evaluation board.

$V_{OUT1} = 5V$, $V_{OUT2} = 16V$, full load, $T_A = 25^{\circ}C$, unless otherwise noted.


Start Up
 $V_{IN}=115V_{AC}$

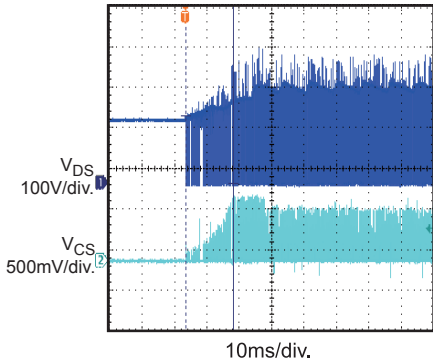


Start Up
 $V_{IN}=230V_{AC}$

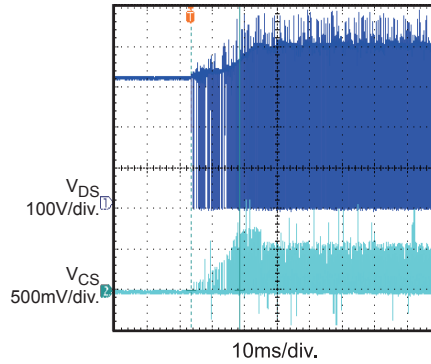


EMI
Three Line, 110V, L

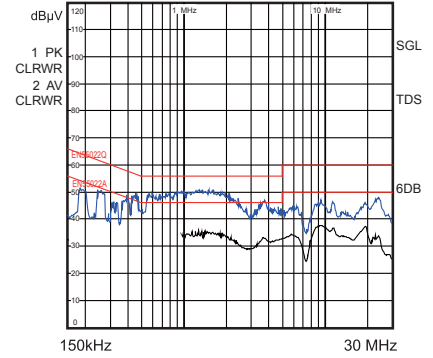


EMI
Three Line, 110V, N

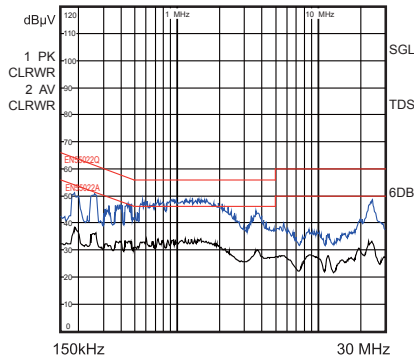

EMI
Three Line, 230V, L

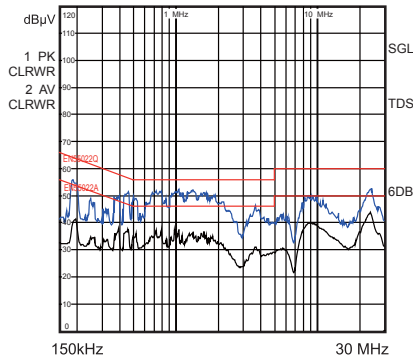

EMI
Three Line, 230V, N

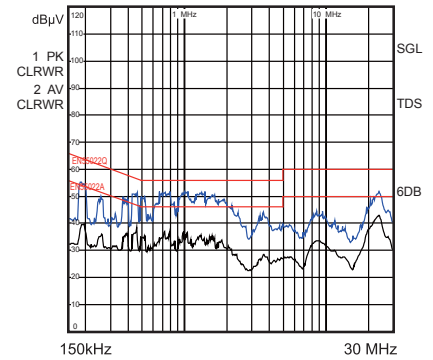

PRINTED CIRCUIT BOARD LAYOUT

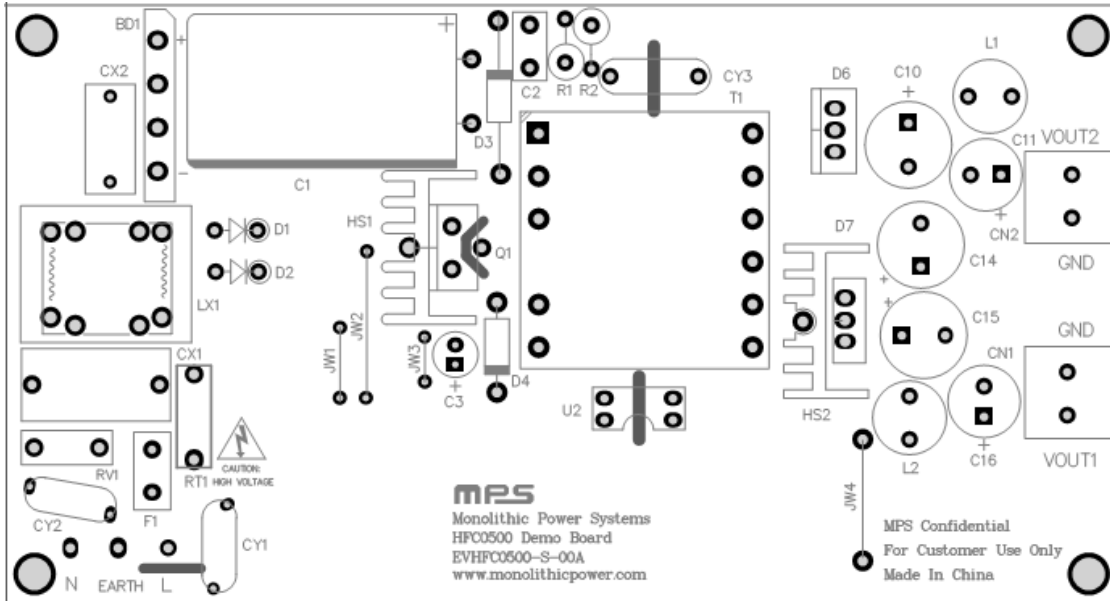


Figure 1 — Top Layer

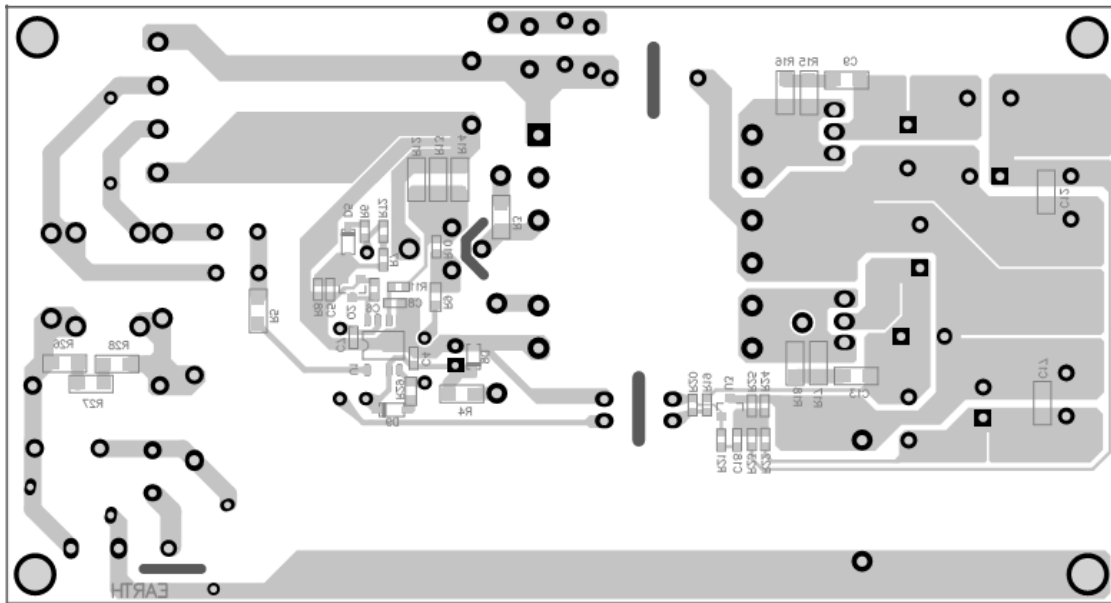


Figure 2 — Bottom Layer

QUICK START GUIDE

1. Preset Power Supply to $90V \leq V_{AC} \leq 265V$.
2. Turn Power Supply off.
3. Connect the power supply output to L and N pins respectively.
4. Connect the positive and negative terminals of the Load to VOUT and GND pins respectively.
5. Turn Power Supply on after making connections.

NOTICE: The information in this document is subject to change without notice. Please contact MPS for current specifications. Users should warrant and guarantee that third party Intellectual Property rights are not infringed upon when integrating MPS products into any application. MPS will not assume any legal responsibility for any said applications.