EV155-J-00A

Energy Efficient Off-line Regulator EV Board

The Future of Analog IC Technology

DESCRIPTION

The MP155 is a primary-side regulator that provides accurate constant voltage regulation without the opto-coupler, and supports buck, buck-boost, and flyback topologies. An integrated 500V MOSFET simplifies the structure and reduces costs. These features make it a competitive candidate for off-line low-power applications, such as home appliances and standby power.

The MP155 is a green-mode-operation regulator. Both the peak current and the switching frequency decrease as the load decreases. As a result, it offers excellent efficiency performance at light load, thus improving the overall average efficiency.

The MP155 features various protections such as thermal shutdown (TSD), VCC under-voltage lockout (UVLO), overload protection (OLP), short-circuit protection (SCP), and open loop protection.

The MP155 is available in the TSOT23-5 package.

FEATURES

- Primary-side constant voltage (CV) control, supporting buck, buck-boost and flyback topologies
- Integrated 500V/20Ω MOSFET
- < 100mW No-load power consumption
- Up to 3W output power
- Maximum DCM output current of 130mA
- Maximum CCM output current of 220mA
- Low VCC operating current
- Frequency foldback
- Maximum frequency limit
- Peak current compression
- Internal high-voltage current source
- Internal 350ns leading-edge blanking
- Thermal shutdown (auto restart)
- VCC under-voltage lockout with hysteresis (UVLO)
- Timer-based overload protection.
- Short circuit protection
- Open loop protection

APPLICATIONS

- Home Appliance, white goods and consumer electronics
- Industrial Controls
- Standby Power

All MPS parts are lead-free and adhere to the RoHS directive. For MPS green status, please visit MPS website under Quality Assurance.

"MPS" and "The Future of Analog IC Technology", are Registered Trademarks of Monolithic Power Systems, Inc..

MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2012 MPS. All Rights Reserved.

EV155-J-00A EVALUATION BOARD

(L x W x H) 3.4cm x 2.2cm x 1.6cm

Board Number	MPS IC Number
EV155-J-00A	MP155GJ

EVALUATION BOARD SCHEMATIC

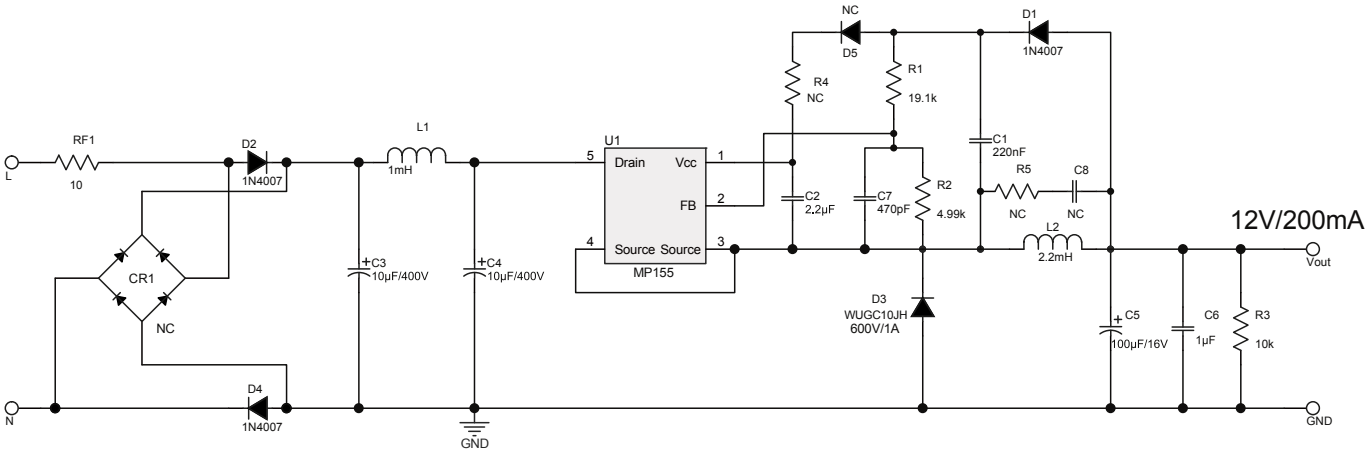

MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2012 MPS. All Rights Reserved.

EV155-J-00A BILL OF MATERIALS

Qty	Ref	Value	Description	Package	Manufacture	Part Number
1	C1	220nF	Ceramic Capacitor; 16V;X7R;0603;	0603	muRata	GRM188R71C224KA01
1	C2	2.2μF	Ceramic Capacitor; 10V;X7R;0603	0603	muRata	GRM188R71A225KE15D
2	C3, C4	10μF/400V	Capacitor;400V;20%	DIP	Any	Any
1	C5	100μF/16V	Electrolytic Capacitor; 16V;Electrolytic;DIP	DIP	Jianghai	CD11C-16V100
1	C6	1μF	Ceramic Capacitor; 50V;X7R;0805;	0805	muRata	GRM21BR71H105KA12L
1	C7	470pF	Ceramic Capacitor;50V;COG	0603	TDK	C1608COG1H471J
3	D1, D2, D4	1N4007	Diode;1000V;1A	DO-41	Diodes	1N4007
1	D3	WUGC10JH	Diode;600V;1A	SMA	ZOWIE	WUGC10JH
1	L1	1mH	Inductor;1mH;6; 250mA	DIP	Wurth	7447462102
1	L2	2.2mH	Inductor;2.2mH;4.73; 300mA	DIP	Wurth	7447720222
1	R1	19.1k	Film Resistor;1%	0603	Yageo	RC0603FR-0719K1L
1	R2	4.99k	Film Resistor;1%;	0603	Yageo	RC0603FR-074K99L
1	R3	10k	Resistor;1%	0603	Yageo	RC0603FR-0710KL
1	RF1	10	Fuse Resistor;5%;1W	DIP	Any	10 Ohm/1W
1	U1	MP155GJ	Buck regulator	TSOT23-5	MPS	MP155GJ

MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2012 MPS. All Rights Reserved.

EVB TEST RESULTS

Performance waveforms are tested on the evaluation board.
V_{IN} = 85-265Vac, V_{OUT} = 12V, I_{OUT} = 200mA, T_A = 25ºC, unless otherwise noted.

Efficiency

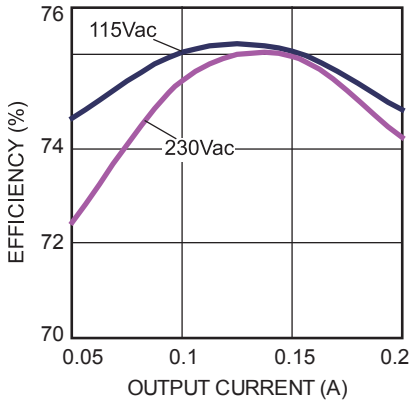

No Load Consumption

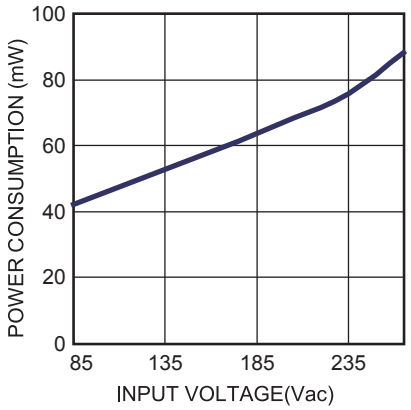

Normal Operation
V_{IN} = 115Vac, Full Load

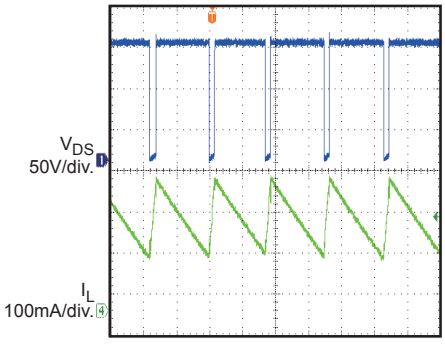

Normal Operation
V_{IN} = 230Vac, Full Load

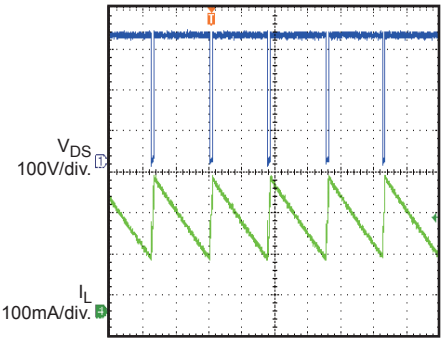

Output Ripple
V_{IN} = 115Vac, No Load

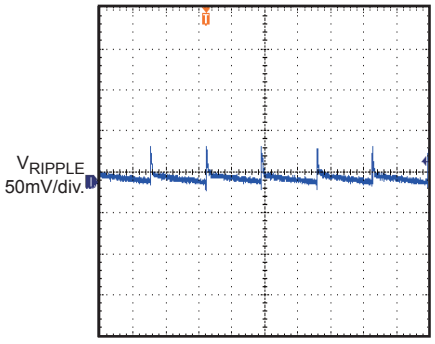

Output Ripple
V_{IN} = 115Vac, Full Load

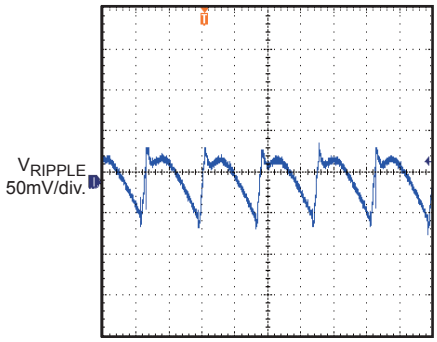

Output Ripple
V_{IN} = 230Vac, No Load

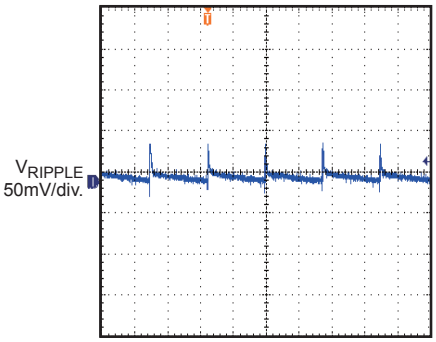

Output Ripple
V_{IN} = 230Vac, Full Load

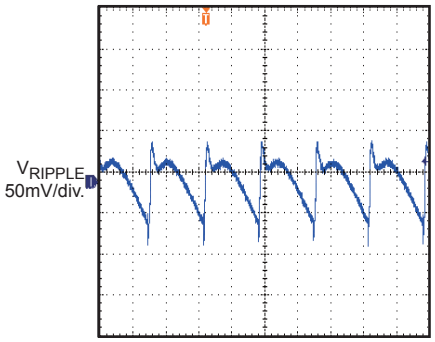

MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2012 MPS. All Rights Reserved.

EVB TEST RESULTS *(continued)*

Performance waveforms are tested on the evaluation board.
V_{IN} = 85-265Vac, V_{OUT} = 12V, I_{OUT} = 200mA, T_A = 25ºC, unless otherwise noted.

Soft Start
V_{IN} = 85Vac

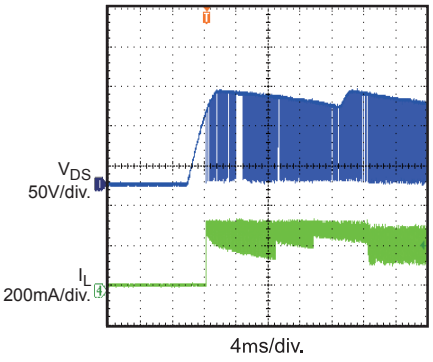

Soft Start
V_{IN} = 265Vac

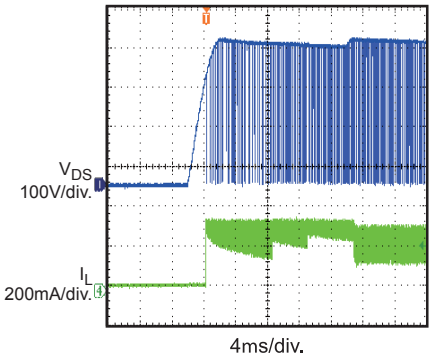

Turn-on Delay
V_{IN} = 115Vac, No Load

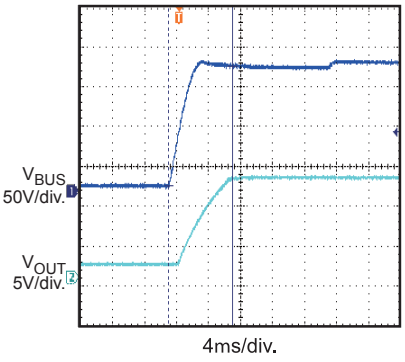

Turn-on Delay
V_{IN} = 115Vac, Full Load

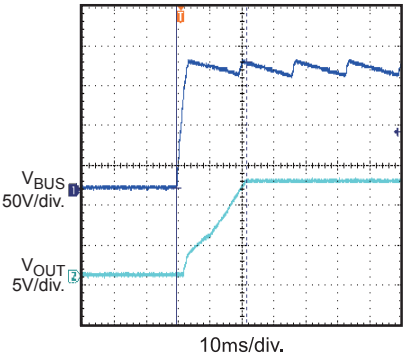

Turn-on Delay
V_{IN} = 230Vac, No Load

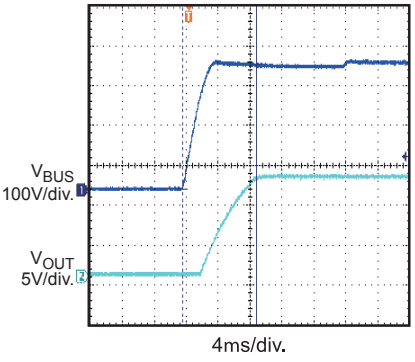

Turn-on Delay
V_{IN} = 230Vac, Full Load

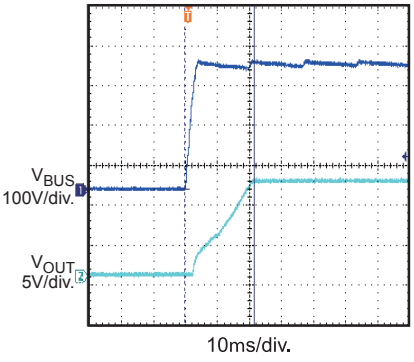

Load Transient
V_{IN} = 115Vac,
25% Load to 50% Load

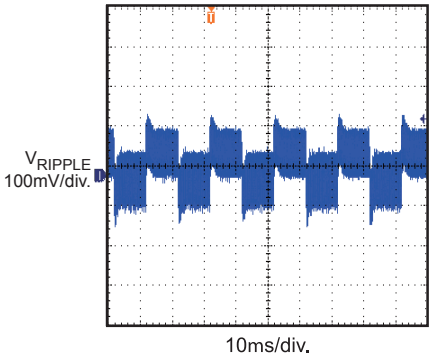

Load Transient
V_{IN} = 115Vac,
50% Load to 75% Load

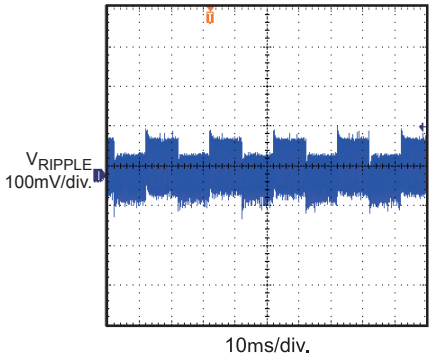

Load Transient
V_{IN} = 230Vac,
25% Load to 50% Load

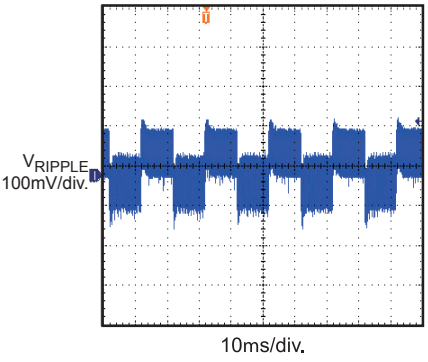

MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2012 MPS. All Rights Reserved.

EVB TEST RESULTS *(continued)*

Performance waveforms are tested on the evaluation board.
V_{IN} = 85-265VAC, V_{OUT} = 12V, I_{OUT} = 200mA, T_A = 25ºC, unless otherwise noted.

Load Transient
V_{IN} = 230Vac,
50% Load to 75% Load

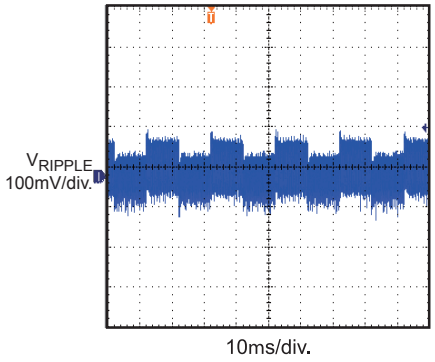

OLP Protection
V_{IN} = 230Vac

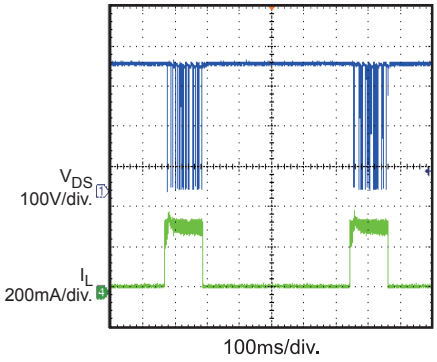

SCP Protection
V_{IN} = 230Vac

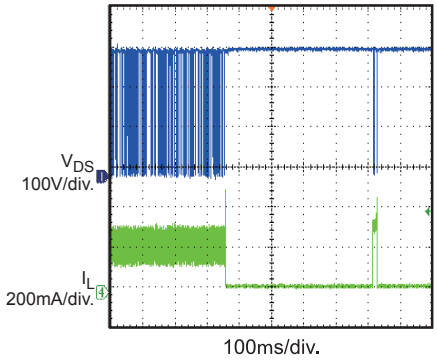

Thermal Down

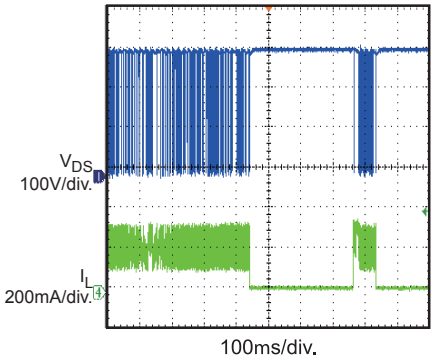

Open Loop
Full Load

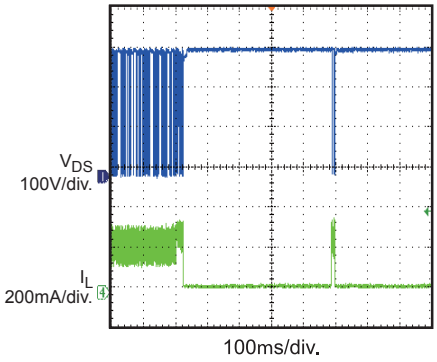

Open Loop
No Load

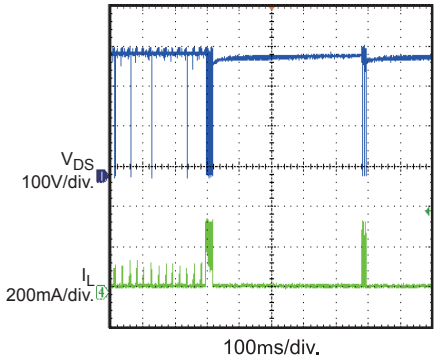

Conducted EMI
Two-wire input, V_{IN} =230VAC
L Line

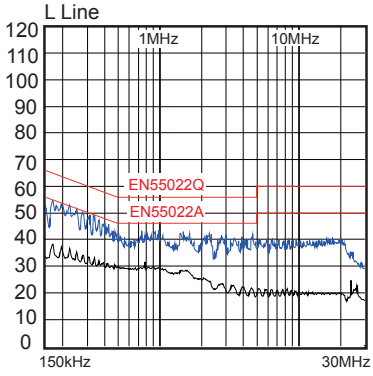

Conducted EMI
Two-wire input, V_{IN} =230VAC
N Line

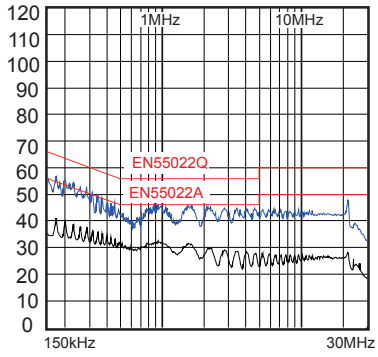

MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2012 MPS. All Rights Reserved.

SURGE PERFORMANCE

With the input capacitors C3 (10μF) and C4 (10μF), the board can pass 1kV surge test. Table 1 shows the capacitance required under normal condition for different surge voltage.

Table 1: Recommended Capacitor Values

Surge Voltage	500V	1000V	2000V
C3	1μF	10μF	22μF
C4	1μF	4.7μF	10μF

MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2012 MPS. All Rights Reserved.

PRINTED CIRCUIT BOARD LAYOUT

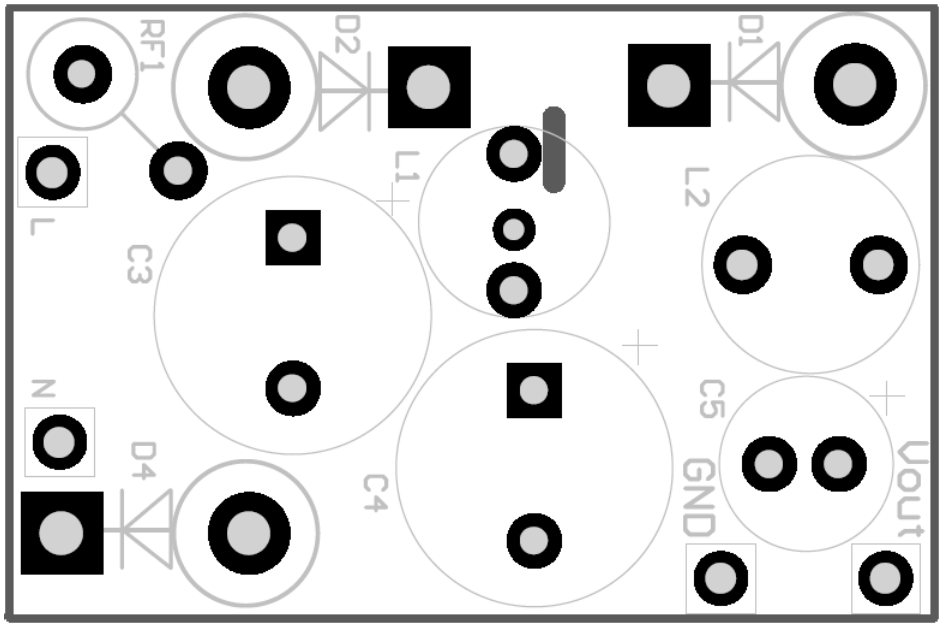

Figure 1 — Top Silk Layer

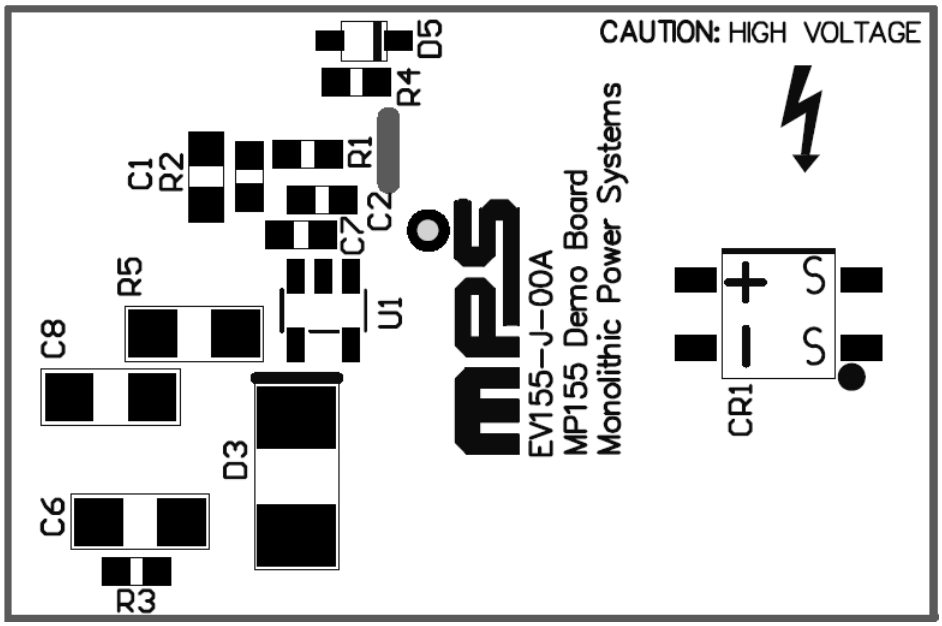

Figure 2 — Bottom Silk Layer

MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2012 MPS. All Rights Reserved.

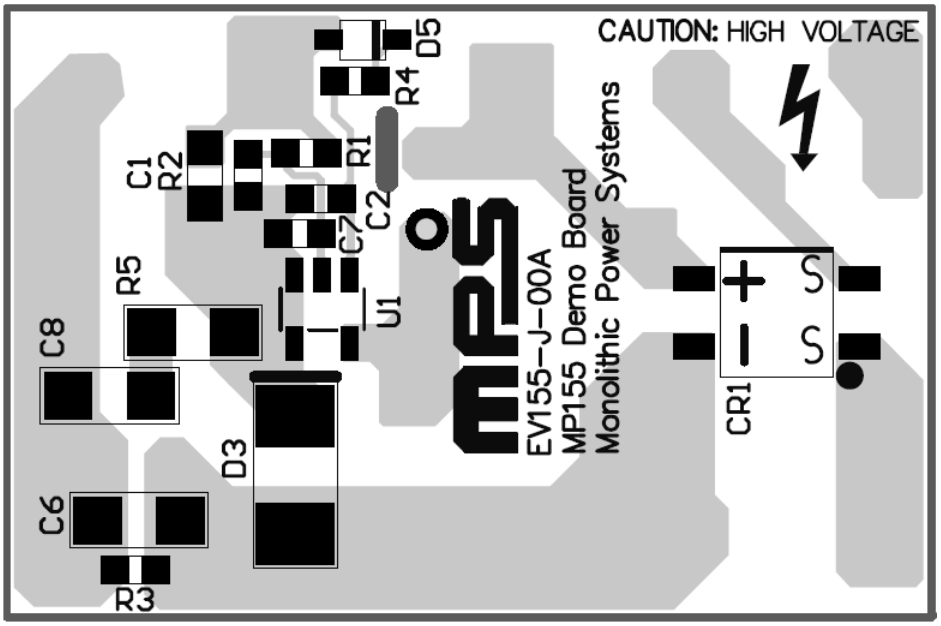

Figure 3 — Bottom Layer

MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2012 MPS. All Rights Reserved.

QUICK START GUIDE

1. Preset Power Supply to 85V ≤ V_{IN} ≤ 265V.
2. Turn Power Supply off.
3. Connect the Line and Neutral terminals of the power supply output to L and N port.
4. Connect the positive terminal of the load to V_{OUT} port, and connect the negative terminal of the load to GND port.
5. Turn Power Supply on after making connections.

NOTICE: The information in this document is subject to change without notice. Please contact MPS for current specifications. Users should warrant and guarantee that third party Intellectual Property rights are not infringed upon when integrating MPS products into any application. MPS will not assume any legal responsibility for any said applications.

MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2012 MPS. All Rights Reserved.