



DESCRIPTION

The EVQ2179B-QH-00A is an evaluation board designed to demonstrate the capabilities of the MPQ2179BGQHE-AEC1, a monolithic, step-down switch-mode converter with built-in internal power MOSFETs.

The MPQ2179B achieves 3A of output current (I_{OUT}) from a 2.5V to 6V input voltage (V_{IN}) range, with excellent load and line regulation. The output voltage (V_{OUT}) can be regulated to as low as 0.5V. A 100% maximum duty cycle can be reached in low-dropout (LDO) mode.

Constant-on-time (COT) control offers a simpler control loop and faster transient response. By using V_{IN} feed-forward, the MPQ2179B maintains a nearly constant switching frequency (f_{sw}) across the input and load ranges. Forced

continuous conduction mode (FCCM) provides a stable frequency and a lower output ripple.

An open-drain power good (PG) signal indicates a nominal voltage after the soft-start time. PG pulls high if the feedback voltage (V_{FB}) reaches 90% of the reference voltage (V_{REF}); PG pulls to GND when V_{FB} drops to 84% of V_{REF} .


Full protection features include cycle-by-cycle current limiting, short-circuit protection (SCP), reliable over-voltage protection (OVP), and thermal protection with automatic recovery.

The EVQ2179B-QH-00A is a fully assembled and tested evaluation board. The MPQ2179B is available in a QFN-8 (1.5mmx2mm) package, and it is available in AEC-Q100 Grade 1.

PERFORMANCE SUMMARY

Specifications are at $T_A = 25^\circ\text{C}$, unless otherwise noted.

Parameters	Conditions	Value
Input voltage (V_{IN}) range		2.5V to 6V
Output voltage (V_{OUT})	$V_{IN} = 2.5\text{V to } 6\text{V}, I_{OUT} = 0\text{A to } 3\text{A}$	0.5V
Maximum output current (I_{OUT})	$V_{IN} = 2.5\text{V to } 6\text{V}$	3A
Typical efficiency	$V_{IN} = 3.3\text{V}, V_{OUT} = 0.5\text{V}, I_{OUT} = 3\text{A}$	69%
Peak efficiency	$V_{IN} = 2.5\text{V}, V_{OUT} = 0.5\text{V}, I_{OUT} = 0.3\text{A}$	88.1%
Switching frequency (f_{sw})		710kHz

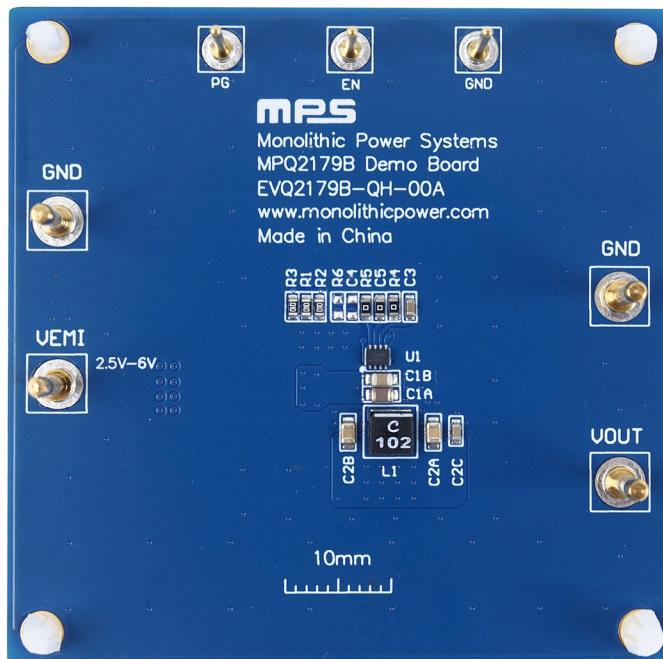EVQ2179B-QH-00A EVALUATION BOARD**LxWxH (6.3cmx6.3cmx1cm)**

Board Number	MPS IC Number
EVQ2179B-QH-00A	MPQ2179BGQHE-AEC1

QUICK START GUIDE

The EVQ2179B-QH-00A evaluation board is easy to set up and use to evaluate the MPQ2179B's performance. For proper measurement equipment set-up, refer to Figure 2 on page 4 and follow the steps below:

1. Preset the power supply (V_{IN}) between 2.5V and 6V, then turn off the power supply.
2. Set the load current between 0A and 3A. Electronic loads represent a negative impedance to the regulator, and setting a current too high may trigger cycle-by-cycle over-current protection (OCP).
3. If longer cables (>0.5m total) are used between the source and the evaluation board, place a damping capacitor at the input terminals.
4. Connect the power supply terminals to:
 - a. Positive (+): VEMI
 - b. Negative (-): GND
5. Connect the load terminals to:
 - a. Positive (+): VOUT
 - b. Negative (-): GND
6. After making the connections, turn on the power supply.
7. To use the enable function, apply a digital input to the EN pin. Drive EN above 0.9V to turn the regulator on; drive EN below 0.65V to turn the regulator off. If the enable function is not used, EN can be connected directly to VIN.
8. The external resistor divider sets the output voltage (V_{OUT}) (see Figure 1).

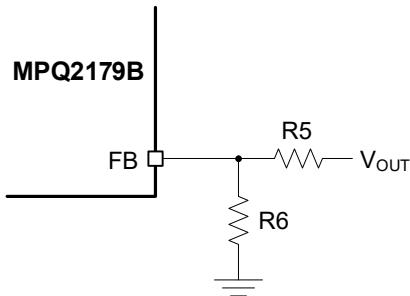


Figure 1: Feedback Divider Network with Adjustable Output

R5 is selected to be between 10kΩ and 100kΩ. R6 can then be calculated with Equation (1):

$$R6 = \frac{R5}{\frac{V_{OUT} - 1}{0.5}} \quad (1)$$

For a 0.5V V_{OUT} , R5 should be 0Ω, and R6 should be NS.

Refer to the Application Information section in the MPQ2179B's datasheet to calculate the inductance and output capacitance for different V_{OUT} values. Figure 2 on page 4 shows the proper measurement equipment set-up.

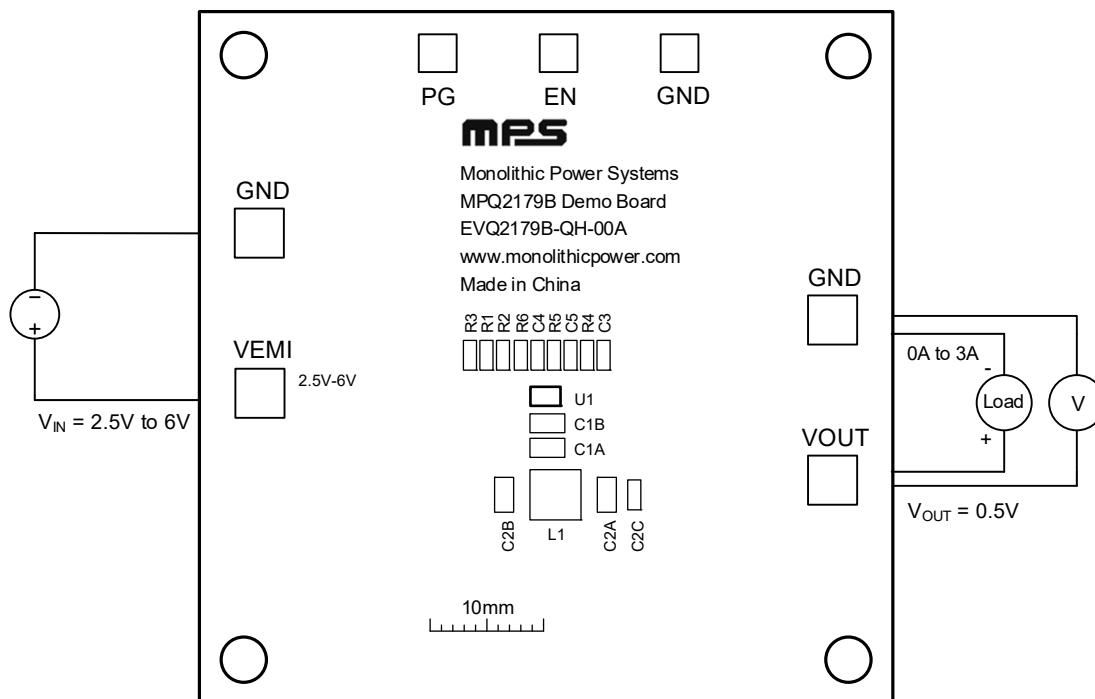


Figure 2: Measurement Equipment Set-Up

EVALUATION BOARD SCHEMATIC


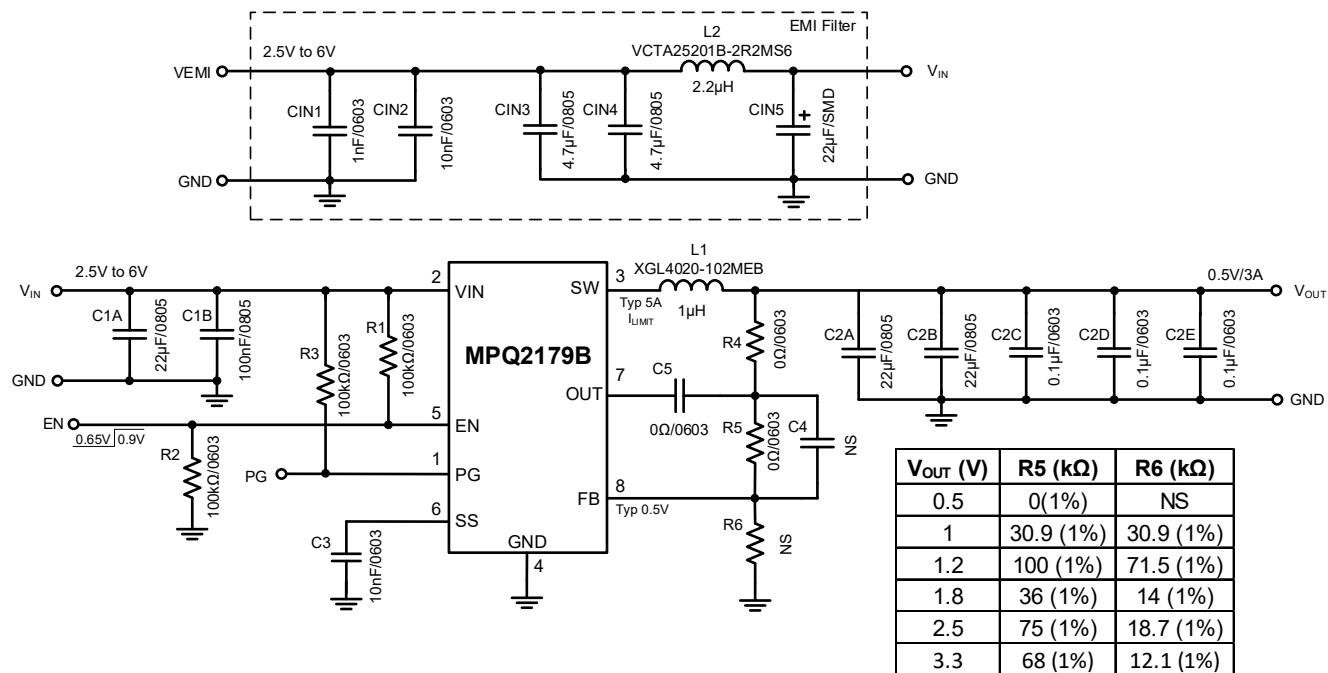


Figure 3: Evaluation Board Schematic

PACKAGE REFERENCE

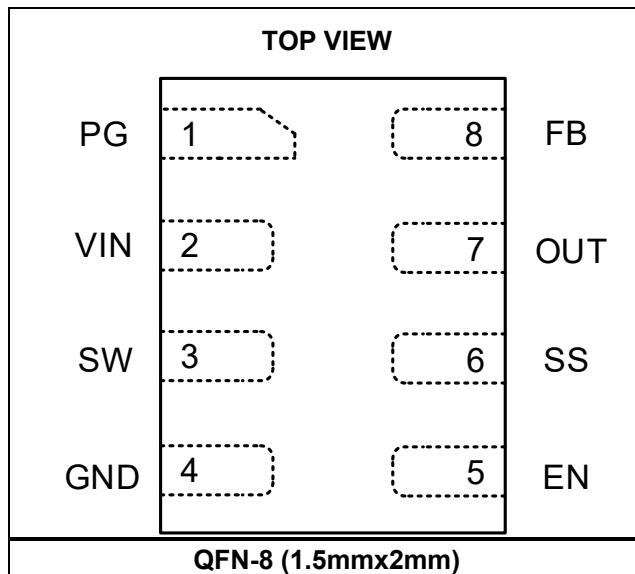

EVQ2179B-QH-00A BILL OF MATERIALS

Qty	Ref	Value	Description	Package	Manufacturer	Manufacturer PN
1	CIN1	1nF	Ceramic capacitor, 50V, C0G	0603	Murata	GRM1885C1H102JA01D
1	CIN2	10nF	Ceramic capacitor, 50V, X7R	0603	Murata	GRM188R71H103KA01D
2	CIN3, CIN4	4.7µF	Ceramic capacitor, 16V, X7R	0805	Murata	GCM21BR71C475KA73L
1	CIN5	22µF	Electrical capacitor, 63V	SMD	Jianghai	VTD-63V22
1	C1A	22µF	Ceramic capacitor, 16V, X5R	0805	Murata	GRM21BR61C226ME44L
1	C1B	100nF	Ceramic capacitor, 16V, X7R	0805	Murata	GRM219R71C104KA01D
3	C2C, C2D, C2E	0.1µF	Ceramic capacitor, 16V, X7R	0603	Murata	GRM188R71C104KA01D
2	C2A, C2B	22µF	Ceramic capacitor, 6.3V, X5R	0805	Murata	GRM21BR60J226ME39L
1	C3	10nF	Ceramic capacitor, 50V, X7R	0603	Murata	GRM188R71H103KA01D
2	C4, R6	NS				
3	C5, R4, R5	0Ω	Film resistor, 1%;	0603	Yageo	RC0603FR-070RL
3	R1, R2, R3	100kΩ	Film resistor, 1%	0603	Yageo	RC0603FR-07100KL
1	L1	1µH	Inductor, 8.2mΩ, 8.8A	SMD	Coilcraft	XGL4020-102MEB
1	L2	2.2µH	Inductor, 70mΩ, 3.5A	SMD	Cyntec	VCTA25201B-2R2MS6
4	VEMI, GND, VOUT, GND	2mm	Golden pin	DIP	Custom ⁽¹⁾	
3	EN, PG, GND	1mm	Golden pin	DIP	Custom ⁽¹⁾	
1	U1	MPQ2179B-AEC1	3A, 6V, step-down converter	QFN-8 (1.5mmx 2mm)	MPS	MPQ2179BGQHE-AEC1

Note:


- 1) MPS custom-produces these pins. Contact an MPS FAE for more information.

EVB TEST RESULTS

Performance curves and waveforms are tested on the evaluation board. $V_{IN} = 3.3V$, $V_{OUT} = 0.5V$, $T_A = 25^\circ C$, unless otherwise noted.


Efficiency vs. Load Current

FCCM, $V_{OUT} = 0.5V$, $f_{SW} = 710\text{kHz}$,
 $L = 1\mu\text{H}$ (DCR = $8.2\text{m}\Omega$),
0.1mA to 10mA

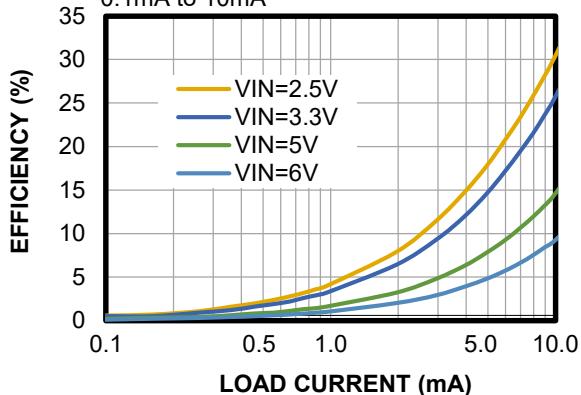


Efficiency vs. Load Current

FCCM, $V_{OUT} = 0.5V$, $f_{SW} = 710\text{kHz}$,
 $L = 1\mu\text{H}$ (DCR = $8.2\text{m}\Omega$),
10mA to 1000mA

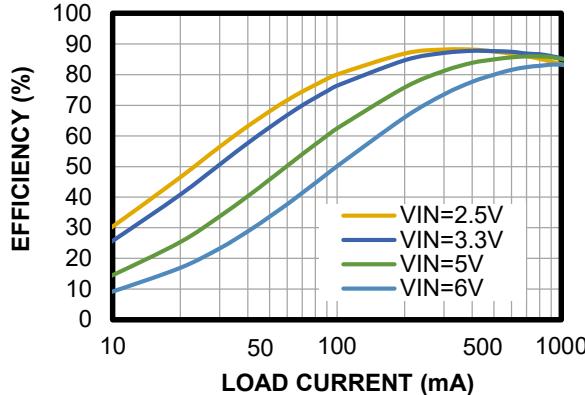


Efficiency vs. Load Current

FCCM, $V_{OUT} = 0.5V$, $f_{SW} = 710\text{kHz}$,
 $L = 1\mu\text{H}$ (DCR = $8.2\text{m}\Omega$), 1A to 3A

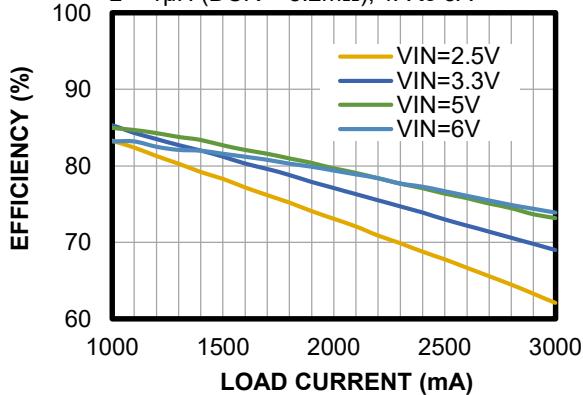


Power Loss vs. Load Current

FCCM, $V_{OUT} = 0.5V$, $f_{SW} = 710\text{kHz}$,
 $L = 1\mu\text{H}$ (DCR = $8.2\text{m}\Omega$),
0.1mA to 10mA

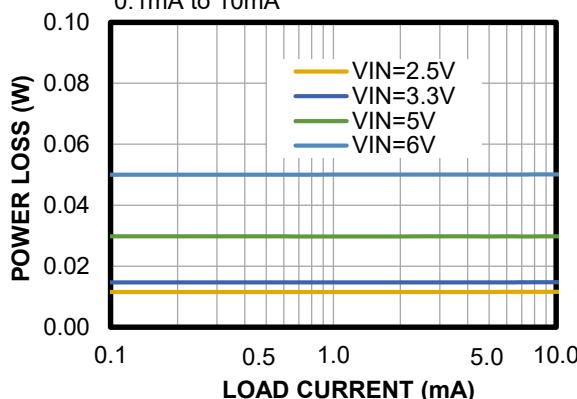


Power Loss vs. Load Current

FCCM, $V_{OUT} = 0.5V$, $f_{SW} = 710\text{kHz}$,
 $L = 1\mu\text{H}$ (DCR = $8.2\text{m}\Omega$),
10mA to 1000mA

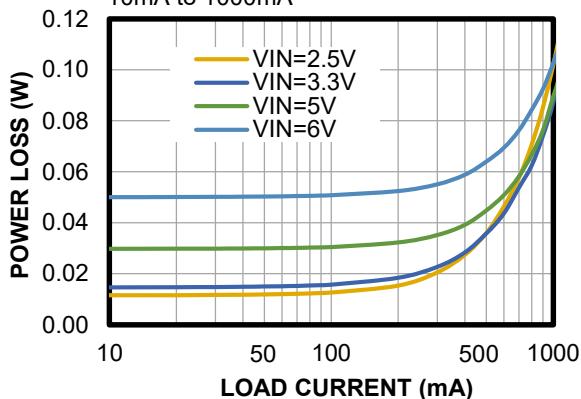

Power Loss vs. Load Current

FCCM, $V_{OUT} = 0.5V$, $f_{SW} = 710\text{kHz}$,
 $L = 1\mu\text{H}$ (DCR = $8.2\text{m}\Omega$), 1A to 3A

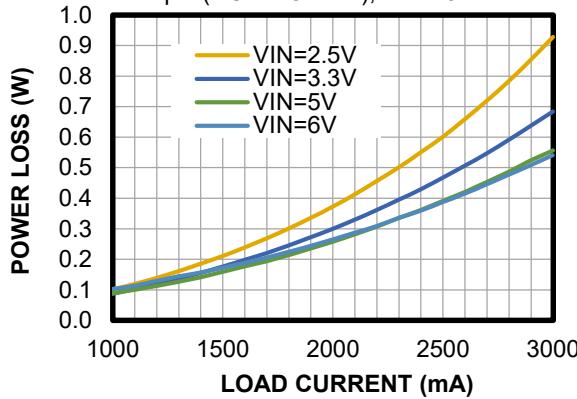


EVB TEST RESULTS (*continued*)

Performance curves and waveforms are tested on the evaluation board. $V_{IN} = 3.3V$, $V_{OUT} = 0.5V$, $T_A = 25^\circ C$, unless otherwise noted.


Line Regulation

FCCM, $V_{OUT} = 0.5V$, $f_{SW} = 710\text{kHz}$,
 $L = 1\mu\text{H}$ (DCR = $8.2\text{m}\Omega$)

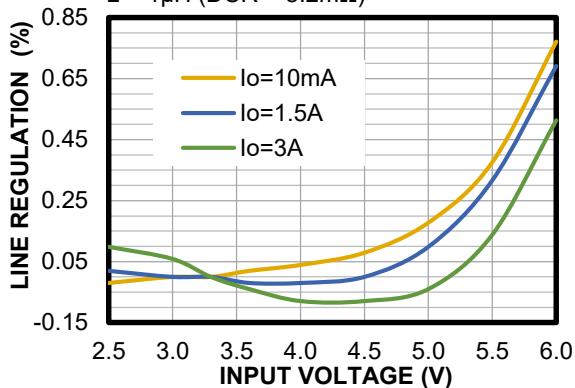


Load Regulation

FCCM, $V_{OUT} = 0.5V$, $f_{SW} = 710\text{kHz}$,
 $L = 1\mu\text{H}$ (DCR = $8.2\text{m}\Omega$)

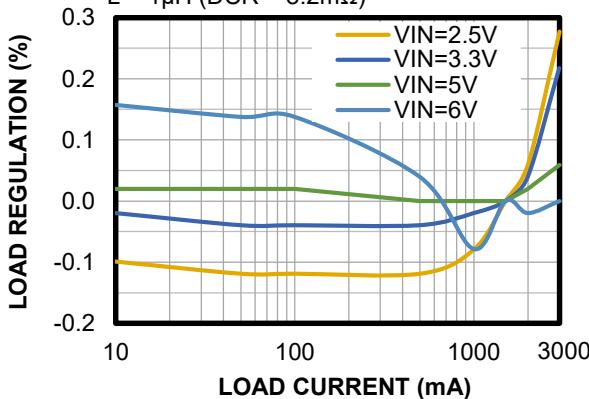


Case Temperature Rise

FCCM, $V_{OUT} = 0.5V$, $f_{SW} = 710\text{kHz}$,
 $L = 1\mu\text{H}$ (DCR = $8.2\text{m}\Omega$).

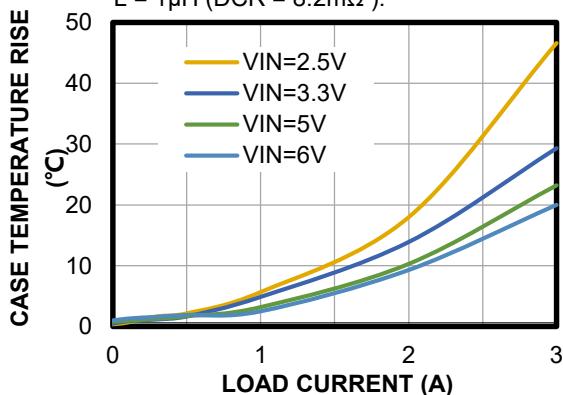

Feedback Voltage vs. Input Voltage

FCCM, $V_{OUT} = 0.5V$, $f_{SW} = 710\text{kHz}$

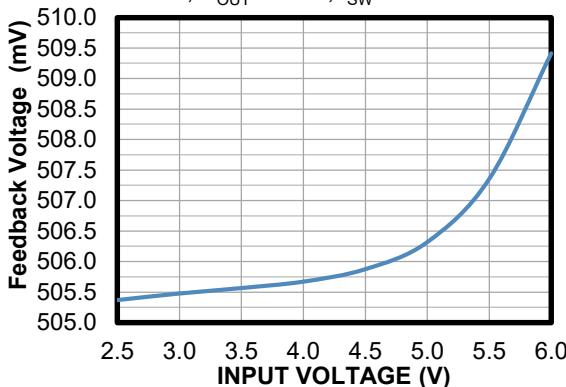


EVB TEST RESULTS (*continued*)

Performance curves and waveforms are tested on the evaluation board. $V_{IN} = 3.3V$, $V_{OUT} = 0.5V$, $T_A = 25^\circ C$, unless otherwise noted.


Thermal Performance

$I_{OUT} = 1.5A$, no forced airflow, $T_{CASE} = 32.2^\circ C$

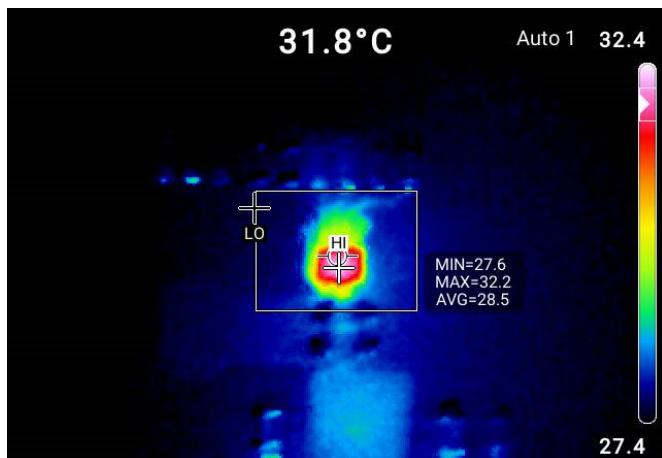

Thermal Performance


$I_{OUT} = 3A$, no forced airflow, $T_{CASE} = 54^\circ C$

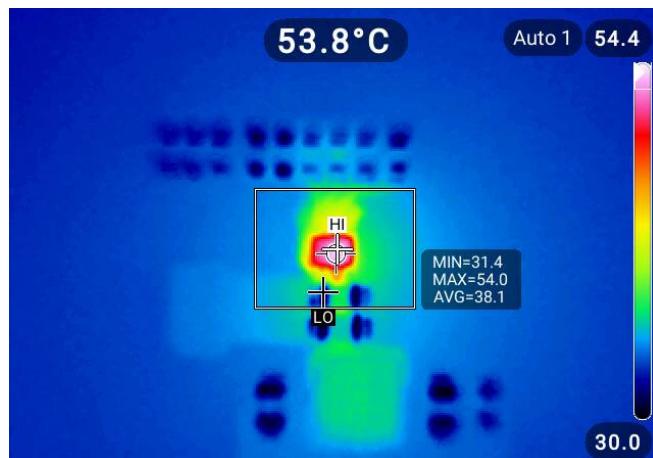


EVB TEST RESULTS (*continued*)

Performance curves and waveforms are tested on the evaluation board. $V_{IN} = 6V$, $V_{OUT} = 0.5V$, $T_A = 25^\circ C$, unless otherwise noted.


CISPR25 Class 5 Peak Conducted Emissions 150kHz to 108MHz

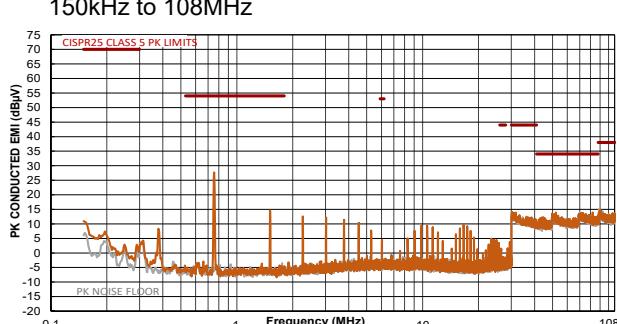


CISPR25 Class 5 Average Conducted Emissions 150kHz to 108MHz

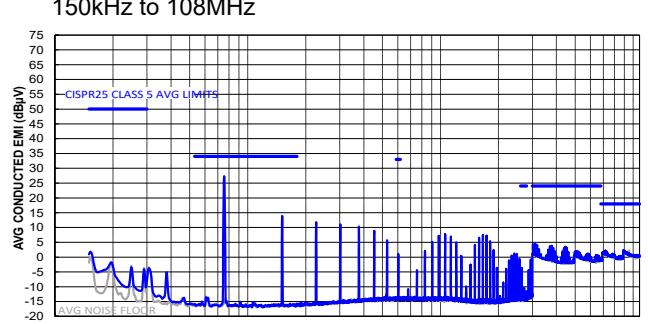


CISPR25 Class 5 Peak Radiated Emissions 150kHz to 30MHz

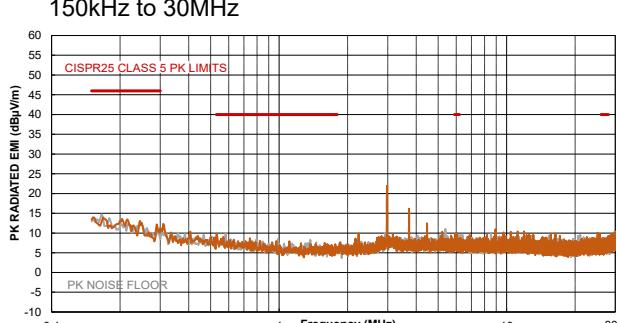


CISPR25 Class 5 Average Radiated Emissions 150kHz to 30MHz

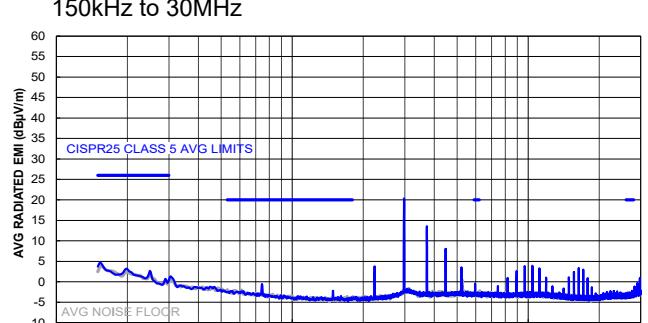

CISPR25 Class 5 Peak Radiated Emissions Horizontal, 30MHz to 1GHz

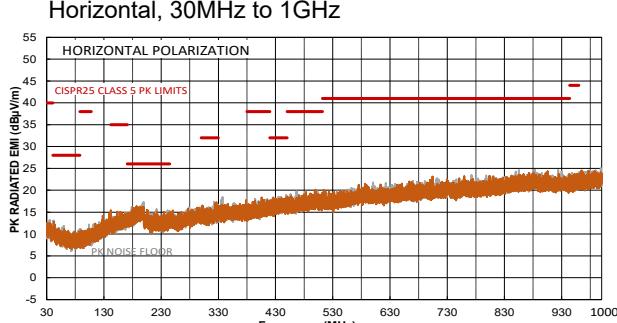

CISPR25 Class 5 Average Radiated Emissions Horizontal, 30MHz to 1GHz

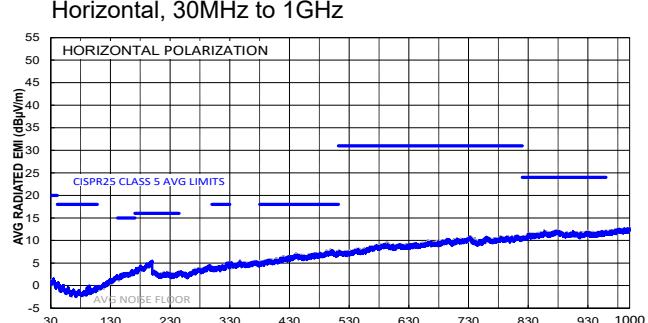


EVB TEST RESULTS (*continued*)

Performance curves and waveforms are tested on the evaluation board. $V_{IN} = 6V$, $V_{OUT} = 0.5V$, $T_A = 25^\circ C$, unless otherwise noted.


CISPR25 Class 5 Peak Radiated Emissions

Vertical, 30MHz to 1GHz

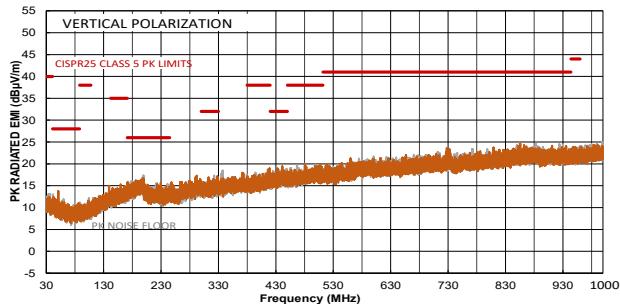

CISPR25 Class 5 Average Radiated Emissions

Vertical, 30MHz to 1GHz

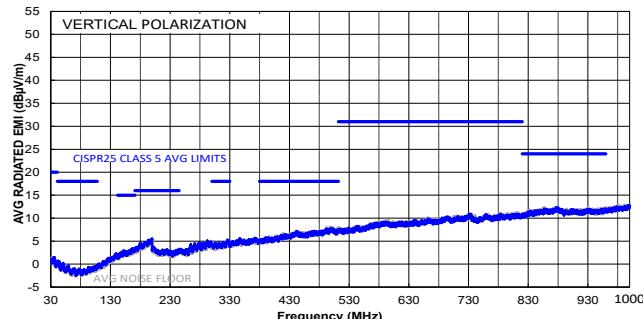


EVB TEST RESULTS (*continued*)

Performance curves and waveforms are tested on the evaluation board. $V_{IN} = 3.3V$, $V_{OUT} = 0.5V$, $T_A = 25^\circ C$, unless otherwise noted.


Steady State

$I_{OUT} = 0A$, FCCM

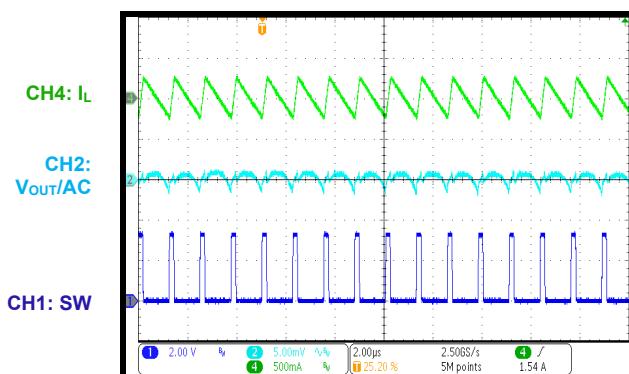


Steady State

$I_{OUT} = 3A$

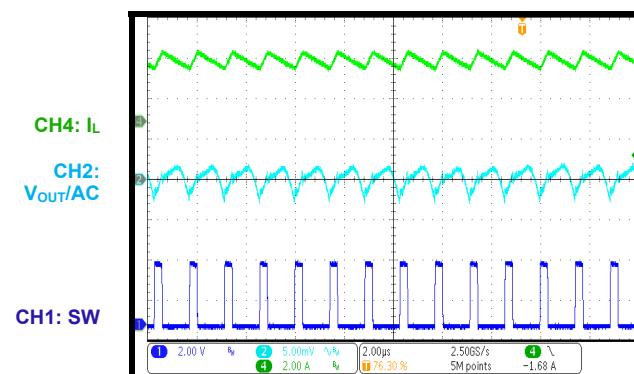


Start-Up through VIN

$I_{OUT} = 0A$, FCCM

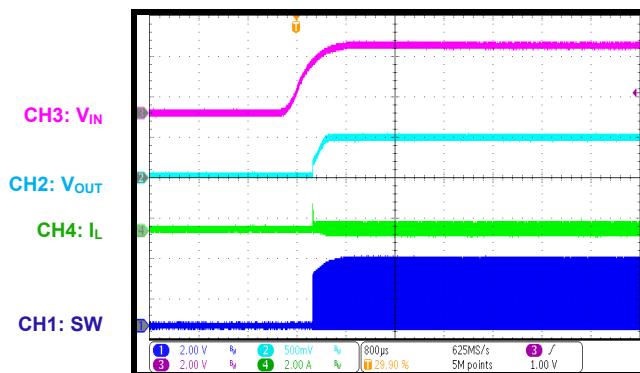


Start-Up through VIN

$I_{OUT} = 3A$

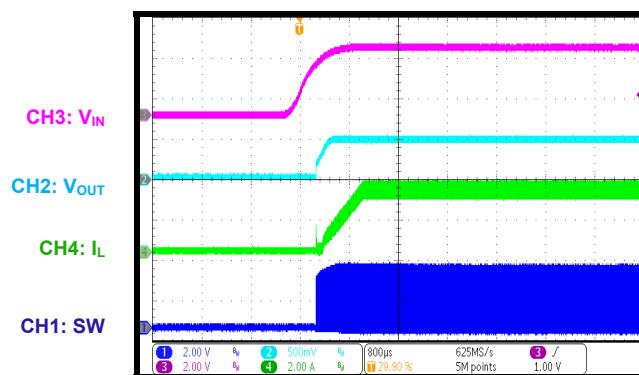


Shutdown through VIN

$I_{OUT} = 0A$, FCCM

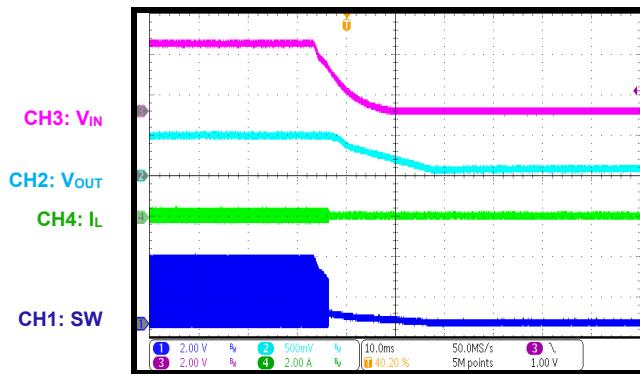

Shutdown through VIN

$I_{OUT} = 3A$

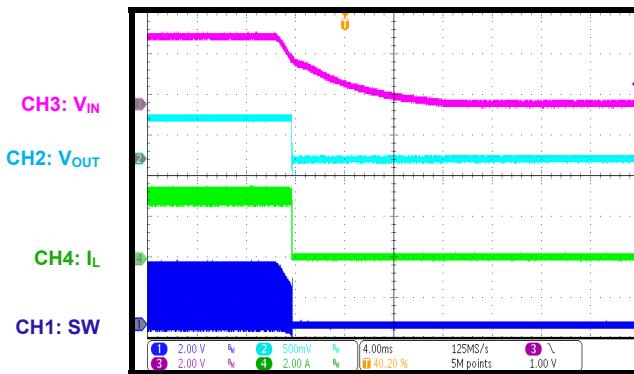


EVB TEST RESULTS (*continued*)

Performance curves and waveforms are tested on the evaluation board. $V_{IN} = 3.3V$, $V_{OUT} = 0.5V$, $T_A = 25^\circ C$, unless otherwise noted.


Start-Up through EN

$I_{OUT} = 0A$, FCCM

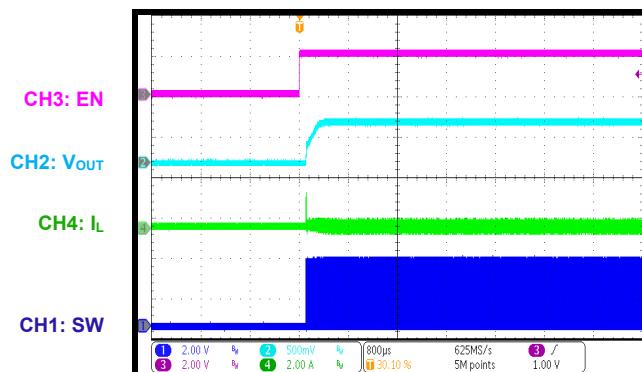


Start-Up through EN

$I_{OUT} = 3A$

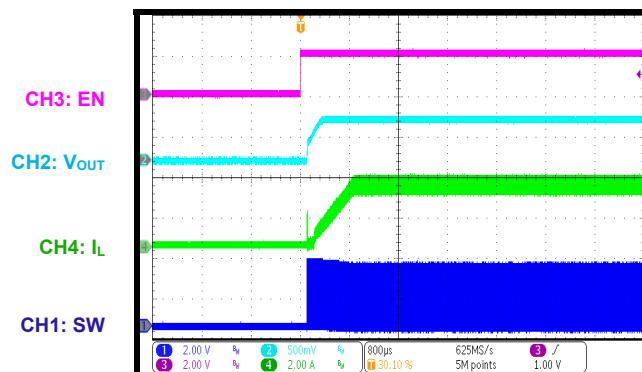


Shutdown through EN

$I_{OUT} = 0A$, FCCM

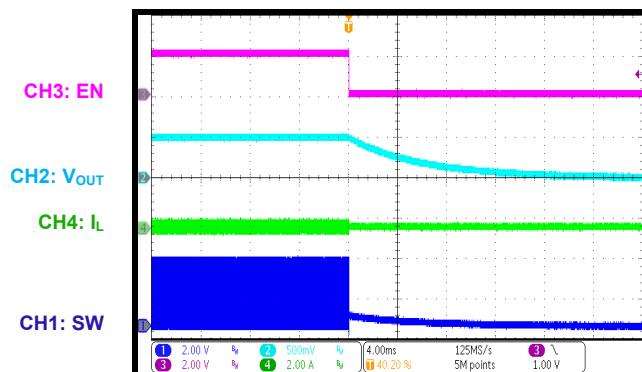


Shutdown through EN

$I_{OUT} = 3A$

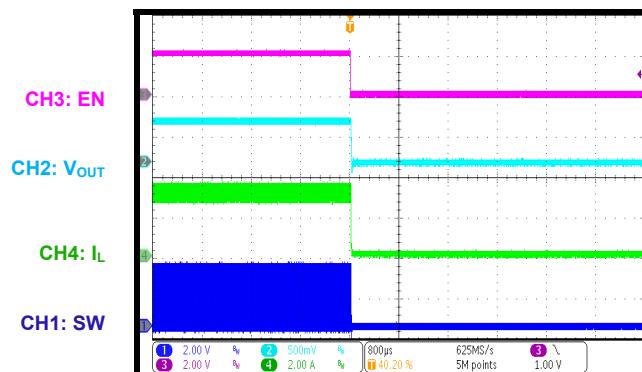


SCP Entry

$I_{OUT} = 0A$, FCCM

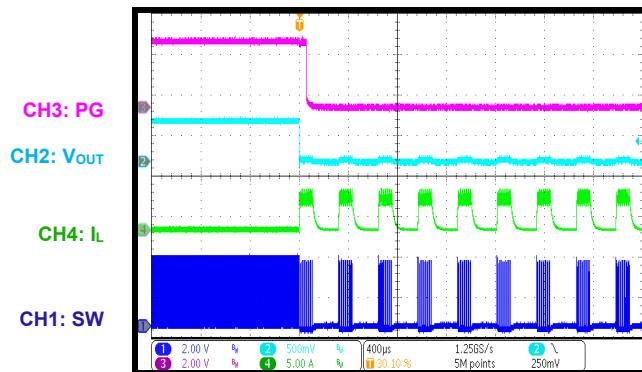

SCP Entry

$I_{OUT} = 3A$

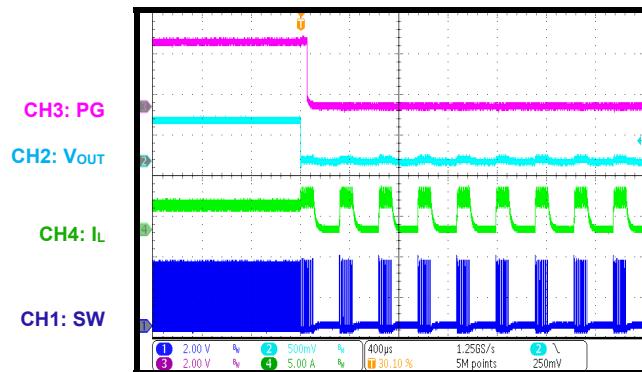


EVB TEST RESULTS (*continued*)

Performance curves and waveforms are tested on the evaluation board. $V_{IN} = 3.3V$, $V_{OUT} = 0.5V$, $T_A = 25^\circ C$, unless otherwise noted.


SCP Recovery

$I_{OUT} = 0A$, FCCM

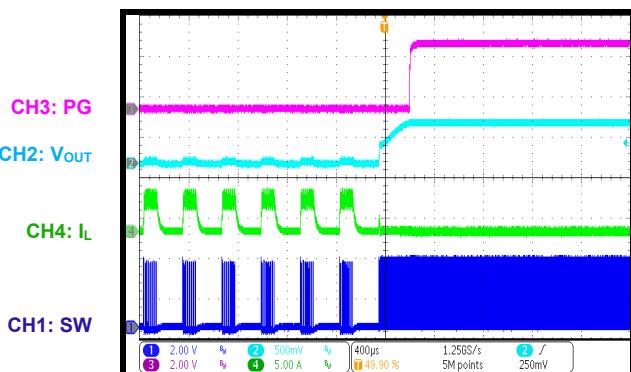


SCP Recovery

$I_{OUT} = 3A$

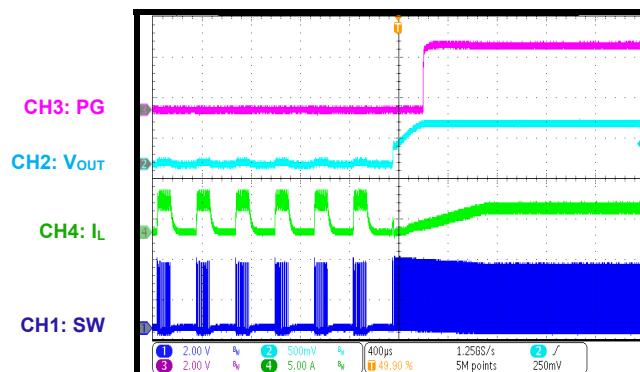


SCP Steady State

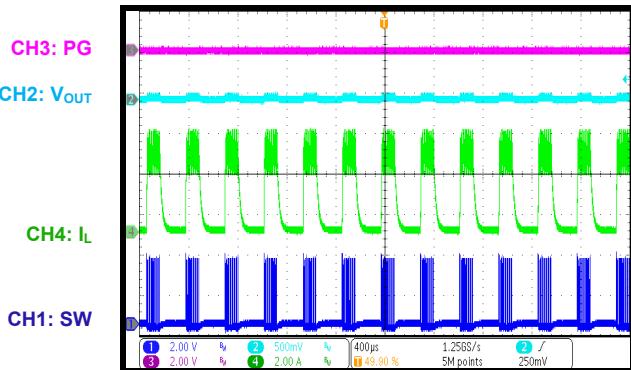


Load Transient

$I_{OUT} = 0A$ to $3A$, $1.6A/\mu s$

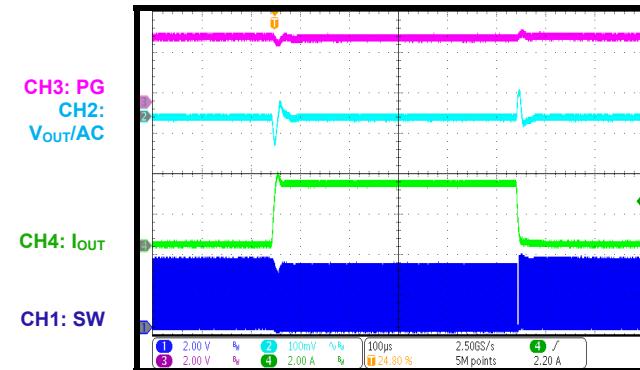


Load Transient

$I_{OUT} = 1.5A$ to $3A$, $1.6A/\mu s$

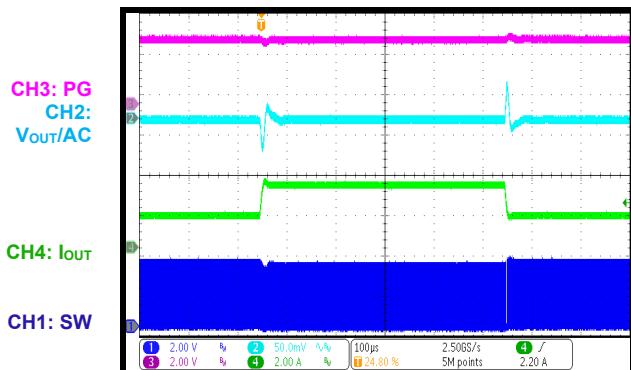

PG Start-Up through VIN

$I_{OUT} = 0A$, FCCM

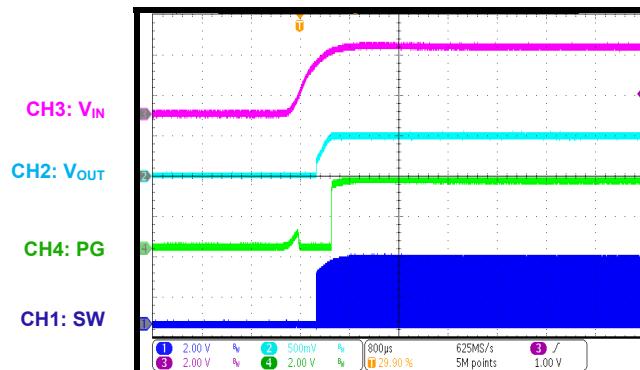


EVB TEST RESULTS (*continued*)

Performance curves and waveforms are tested on the evaluation board. $V_{IN} = 3.3V$, $V_{OUT} = 0.5V$, $T_A = 25^\circ C$, unless otherwise noted.


PG Start-Up through VIN

$I_{OUT} = 3A$

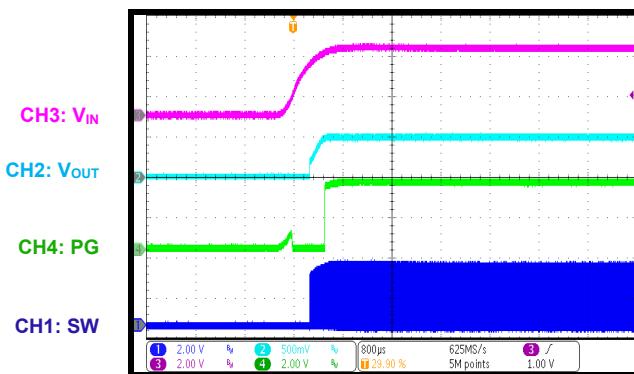


PG Shutdown through VIN

$I_{OUT} = 0A$, FCCM

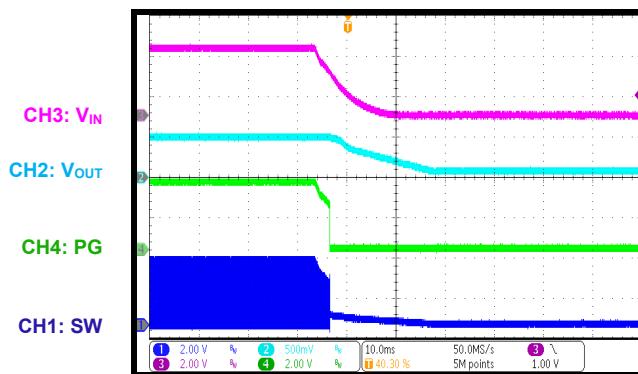


PG Shutdown through VIN

$I_{OUT} = 3A$

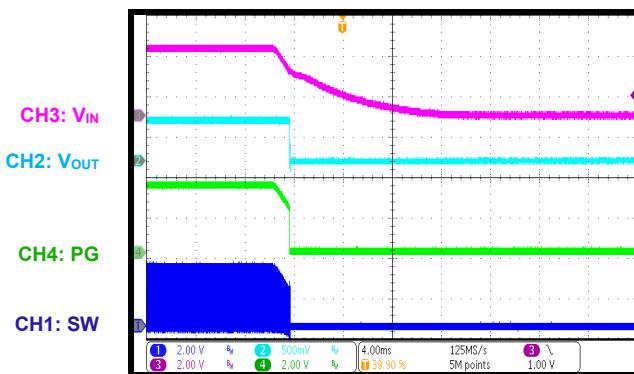


PG Start-Up through EN

$I_{OUT} = 0A$, FCCM

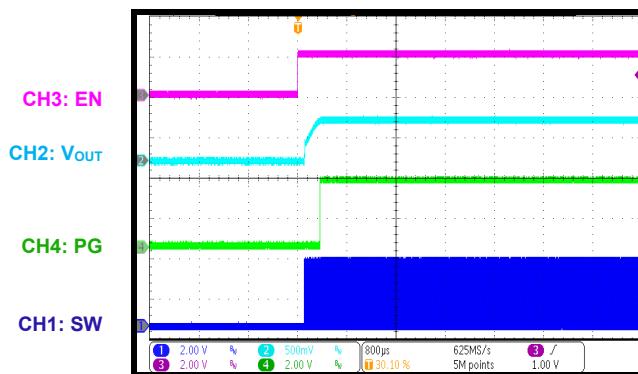


PG Start-Up through EN

$I_{OUT} = 3A$

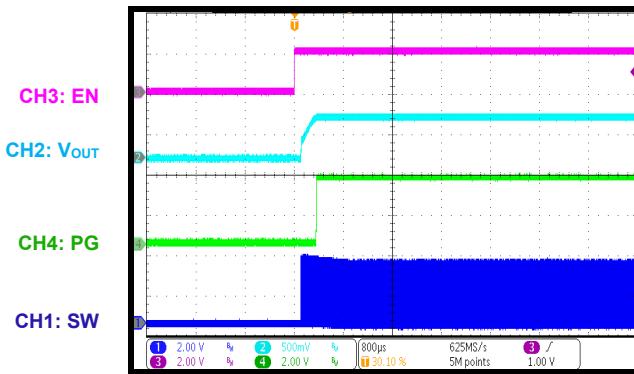

PG Shutdown through EN

$I_{OUT} = 0A$, FCCM

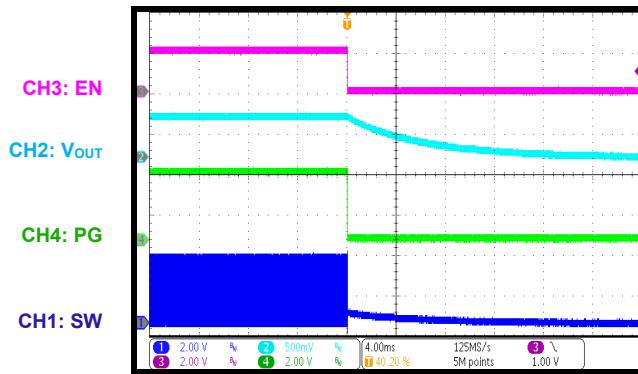






EVB TEST RESULTS (*continued*)

Performance curves and waveforms are tested on the evaluation board. $V_{IN} = 3.3V$, $V_{OUT} = 0.5V$, $T_A = 25^\circ C$, unless otherwise noted.

PG Shutdown through EN

$I_{OUT} = 3A$

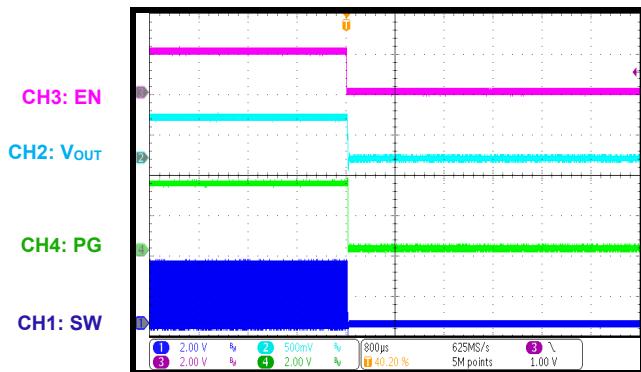

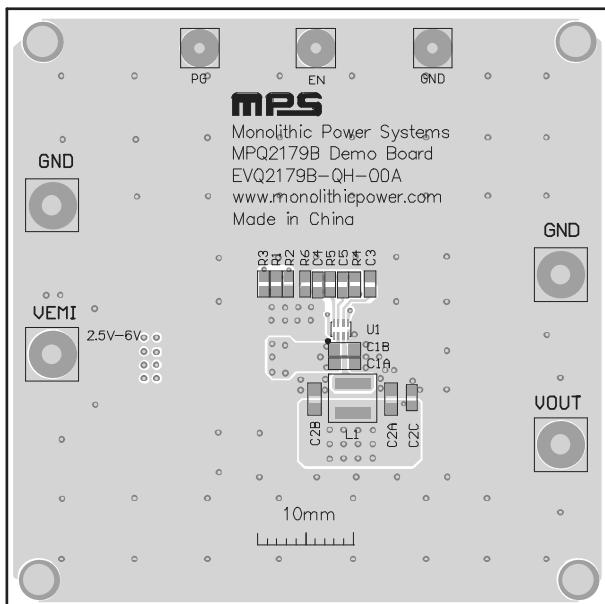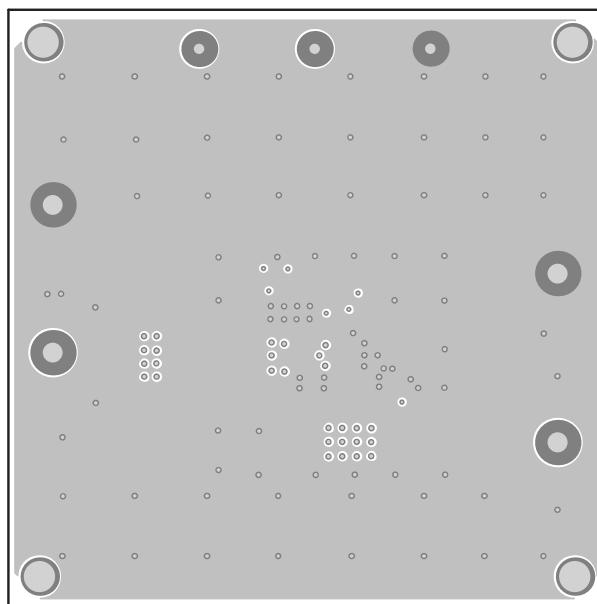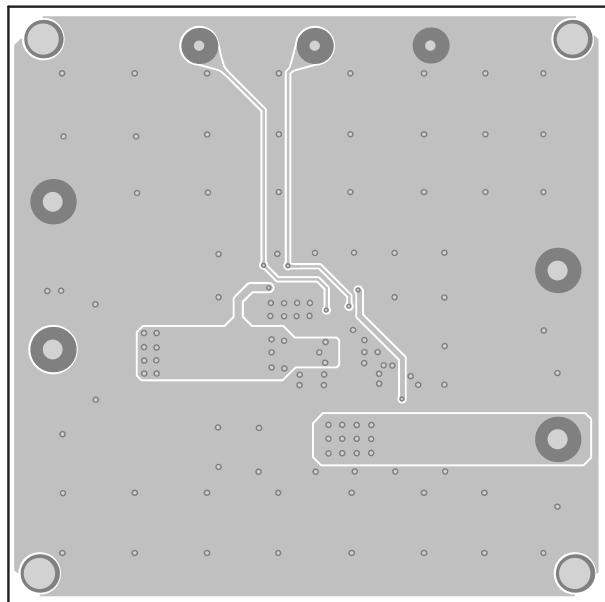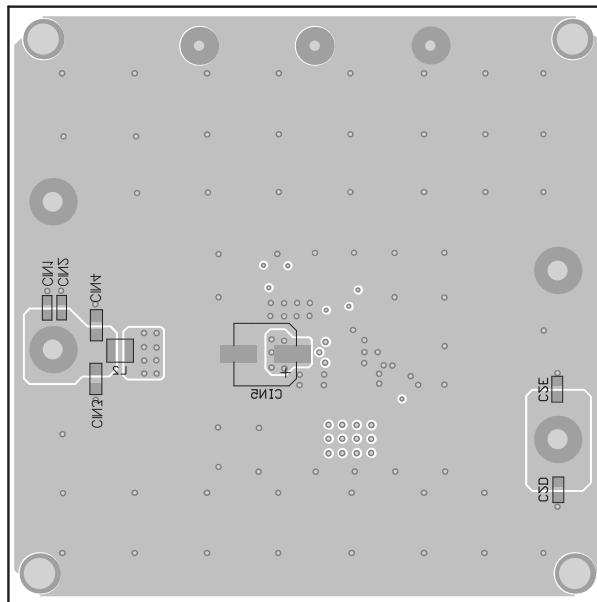PCB LAYOUT (2)**Figure 4: Top Silk and Top Layer****Figure 5: Mid-Layer 1****Figure 6: Mid-Layer 2****Figure 7: Bottom Layer and Bottom Silk****Note:**

- 2) The copper thickness is 2oz.

REVISION HISTORY

Revision #	Revision Date	Description	Pages Updated
1.0	1/16/2024	Initial Release	-

Notice: The information in this document is subject to change without notice. Please contact MPS for current specifications. Users should warrant and guarantee that third-party Intellectual Property rights are not infringed upon when integrating MPS products into any application. MPS will not assume any legal responsibility for any said applications.