



# MP6637

## 5.5V, 1.3A Peak, Three-Phase, Sensorless BLDC Motor Driver with Integrated MOSFETs

### DESCRIPTION

The MP6637 is a three-phase, sensorless, brushless DC (BLDC) motor driver with integrated power MOSFETs. The device features sinusoidal sensorless control for better efficiency and low vibration, with up to 1.3A of peak phase current. The input voltage ( $V_{CC}$ ) ranges from 2.5V to 5.5V.

The MP6637 controls the motor speed through the pulse-width modulation (PWM) signal with a 1kHz to 100kHz PWM input frequency.

The MP6637 features rotational speed detection. The rotational speed is an open-drain output via the FG/RD pin.

Rich protection features include input over-voltage protection (OVP), under-voltage lockout (UVLO), locked-rotor protection, over-current protection (OCP), and thermal shutdown.

The MP6637 is available in an SOT583 package.

### FEATURES


- 2.5V to 5.5V Operating Input Voltage ( $V_{CC}$ ) Range
- Up to 1.3A of Peak Phase Current
- Sinusoidal Sensorless Control
- Integrated 350m $\Omega$  High-Side MOSFETs (HS-FETs) and Low-Side MOSFETs (LS-FETs)
- Supports 1kHz to 100kHz Pulse-Width Modulation (PWM) Input
- Power-Save Mode (PSM)
- 30kHz Switching Frequency ( $f_{sw}$ )
- Current Limit
- Short-Circuit Protection (SCP)
- Over-Voltage Protection (OVP)
- Locked-Rotor Protection
- Selectable FG or RD Output
- Available in an SOT583 Package

### APPLICATIONS

- Notebook Fans
- Gaming Fans
- General 3-Phase Fans

All MPS parts are lead-free, halogen-free, and adhere to the RoHS directive. For MPS green status, please visit the MPS website under Quality Assurance. "MPS", the MPS logo, and "Simple, Easy Solutions" are trademarks of Monolithic Power Systems, Inc. or its subsidiaries.

### TYPICAL APPLICATION

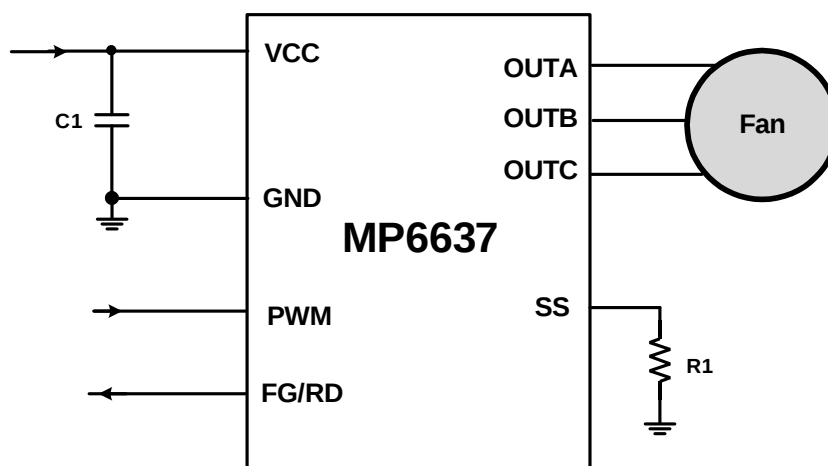

## ORDERING INFORMATION

| Part Number*     | Package | Top Marking | MSL Rating |
|------------------|---------|-------------|------------|
| MP6637GTL-xxxx** | SOT583  | See Below   | 1          |

\* For Tape & Reel, add suffix -Z (e.g. MP6637GTL-xxxx-Z).


\*\* “xxxx” is the configuration code identifier. The first four digits of the suffix (xxxx) can be a hexadecimal value between 0 and F. Work with an MPS FAE to create this unique number for non-default function options. The default code is “0000”.

## TOP MARKING

**BZDY**  
**LLL**

BZD: Product code  
Y: Year code  
LLL: Lot number

## PACKAGE REFERENCE

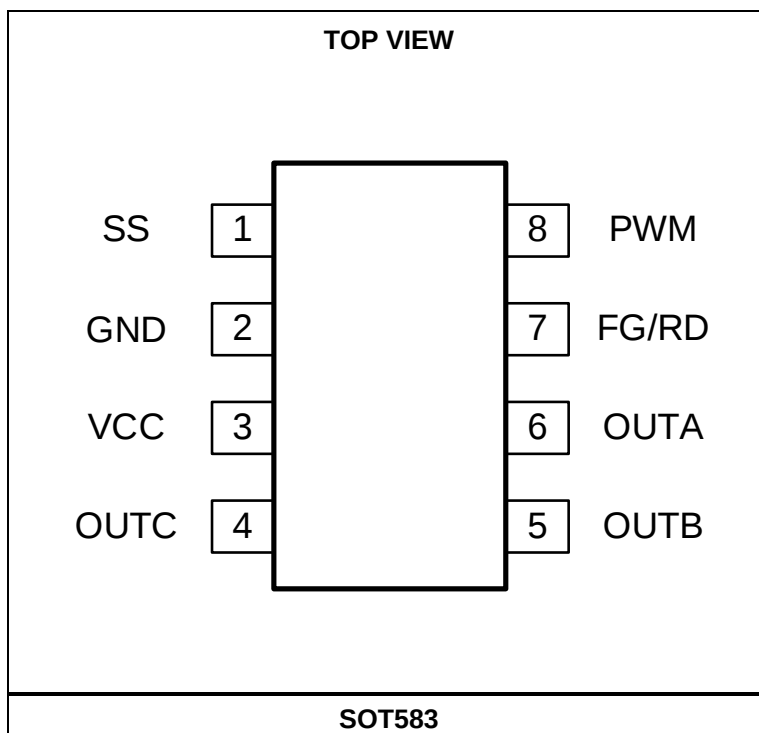

## PIN FUNCTIONS

| Pin # | Name  | Description                                                                                                                                                                        |
|-------|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1     | SS    | <b>Soft Start (SS).</b> To select SS parameters, connect a resistor to meet different load requirements.                                                                           |
| 2     | GND   | <b>Ground.</b>                                                                                                                                                                     |
| 3     | VCC   | <b>Input supply voltage.</b> Place a bypass capacitor as close to the VCC and GND pins as possible.                                                                                |
| 4     | OUTC  | <b>Phase C terminal.</b>                                                                                                                                                           |
| 5     | OUTB  | <b>Phase B terminal.</b>                                                                                                                                                           |
| 6     | OUTA  | <b>Phase A terminal.</b>                                                                                                                                                           |
| 7     | FG/RD | <b>Speed (FG) or rotor lock (RD) indication.</b> The FG/RD pin is an open-drain output that is pulled up externally.                                                               |
| 8     | PWM   | <b>Speed control input.</b> Apply a pulse-width modulation (PWM) signal to the PWM pin. The PWM signal's duty cycle controls the motor speed. The PWM frequency is 1kHz to 100kHz. |

## ABSOLUTE MAXIMUM RATINGS <sup>(1)</sup>

All pins ..... -0.3V to +6.5V  
 Junction temperature ( $T_J$ ) ..... 150°C  
 Lead temperature ..... 260°C  
 Continuous power dissipation ( $T_A = 25^\circ\text{C}$ ) <sup>(2)</sup>  
 ..... 0.96W  
 Supply voltage ( $V_{CC}$ ) ..... 2.5V to 5.5V  
 Operating temperature ..... -40°C to +125°C

## ESD Ratings

Human body model (HBM) ..... 4kV  
 Charged-device model (CDM) ..... 2kV

## Recommended Operating Conditions <sup>(3)</sup>

Supply voltage ( $V_{CC}$ ) ..... 2.5V to 5.5V  
 Operating junction temp ( $T_J$ ) .... -40°C to +125°C

**Thermal Resistance <sup>(4)</sup>**       $\theta_{JA}$        $\theta_{JC}$   
 SOT583 ..... 130 ..... 60... °C/W

### Notes:

- Exceeding these ratings may damage the device.
- The maximum allowable power dissipation is a function of the maximum junction temperature  $T_J$  (MAX), the junction-to-ambient thermal resistance  $\theta_{JA}$ , and the ambient temperature  $T_A$ . The maximum allowable continuous power dissipation at any ambient temperature is calculated by  $P_D$  (MAX) =  $(T_J$  (MAX) -  $T_A$ ) /  $\theta_{JA}$ . Exceeding the maximum allowable power dissipation can produce an excessive die temperature, and may cause the regulator to go into thermal shutdown. Internal thermal shutdown circuitry protects the device from permanent damage.
- The device is not guaranteed to function outside of its operating conditions.
- Measured on a JESD51-7, 4-layer PCB.

## ELECTRICAL CHARACTERISTICS

$V_{IN} = 5V$ ,  $T_J = -40^{\circ}C$  to  $+125^{\circ}C$ , unless otherwise noted.


| Parameters                                          | Symbol           | Condition           | Min  | Typ  | Max  | Units       |
|-----------------------------------------------------|------------------|---------------------|------|------|------|-------------|
| Input under-voltage lockout (UVLO) rising threshold | $V_{CC\_UVLO}$   |                     |      | 2.3  | 2.4  | V           |
| Input UVLO hysteresis                               |                  |                     |      | 0.23 |      | V           |
| Operating supply current                            | $I_{CC}$         | No load             |      | 2.1  | 2.6  | mA          |
| Standby current                                     | $I_{ST}$         | PWM low             |      | 45   | 70   | $\mu A$     |
| Pulse-width modulation (PWM) input high voltage     | $V_{PWMH}$       |                     | 2    |      | 5.5  | V           |
| PWM input low voltage                               | $V_{PWML}$       |                     | 0    |      | 0.8  | V           |
| PWM input internal pull-up resistance               |                  |                     |      | 40   |      | k $\Omega$  |
| Soft start (SS) output current ( $I_{OUT}$ )        | $I_{SS}$         |                     |      | 50   |      | $\mu A$     |
| Switching frequency                                 | $f_{SW}$         | $T_J = 25^{\circ}C$ | 29.1 | 30   | 30.9 | kHz         |
| High-side MOSFET (HS-FET) on resistance             | $R_{DS(ON)\_HS}$ | $I_{OUT} = 100mA$   |      | 200  |      | m $\Omega$  |
| Low-side MOSFET (LS-FET) on resistance              | $R_{DS(ON)\_LS}$ | $I_{OUT} = 100mA$   |      | 150  |      | m $\Omega$  |
| Over-current protection (OCP) threshold             | $I_{OCP}$        | $T_J = 25^{\circ}C$ | 1    | 1.3  | 1.6  | A           |
| Short-circuit protection (SCP) threshold            | $I_{SCP}$        |                     |      | 1.9  |      | A           |
| FG/RD output low-level voltage                      | $V_{FG\_L}$      | $I_{FG/RD} = 3mA$   |      | 0.11 | 0.2  | V           |
| Rotor-lock off time                                 | $t_{RE}$         |                     | 4    | 4.4  | 4.8  | sec         |
| Input over-voltage protection (OVP) threshold       | $V_{OVP}$        |                     | 5.6  | 5.8  | 6    | V           |
| OVP hysteresis                                      | $V_{OVP\_HYS}$   |                     | 0.4  | 0.44 | 0.48 | V           |
| Thermal shutdown threshold                          |                  |                     |      | 150  |      | $^{\circ}C$ |
| Thermal shutdown hysteresis                         |                  |                     |      | 20   |      | $^{\circ}C$ |

## TYPICAL CHARACTERISTICS


$V_{CC} = 5V$ ,  $T_J = -40^{\circ}C$  to  $+125^{\circ}C$ , unless otherwise noted.

**Supply Current vs. Input Voltage**


$V_{CC} = 2V$  to  $5.5V$ , no load,  $T_J = 25^{\circ}C$

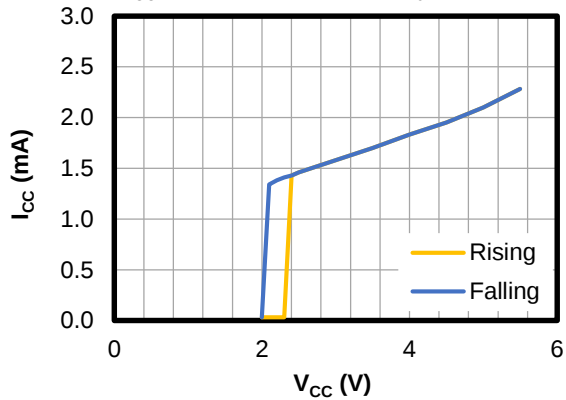


**Supply Current vs. Junction Temperature**

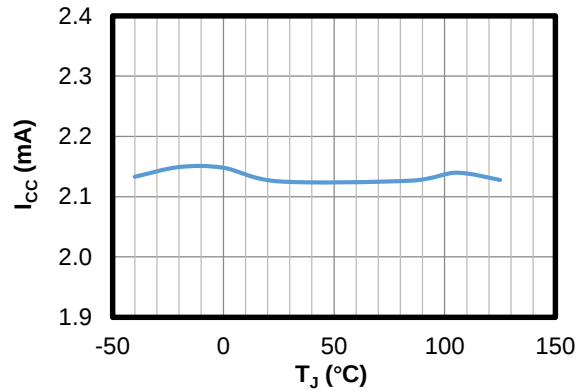


**$V_{CC}$  UVLO vs. Junction Temperature**

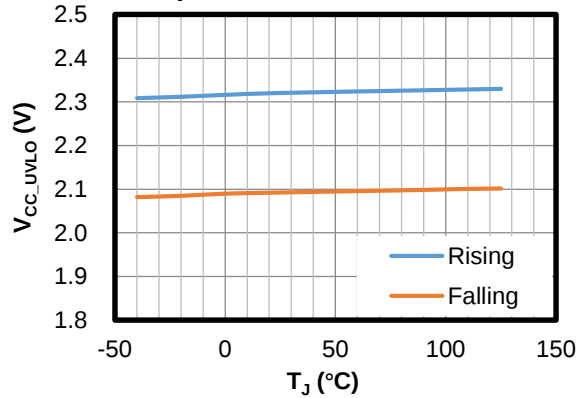


**$V_{CC}$  UVLO Hysteresis vs. Junction Temperature**

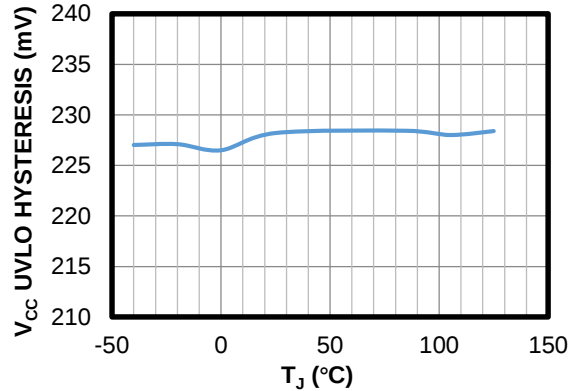

**OVP Threshold vs. Junction Temperature**






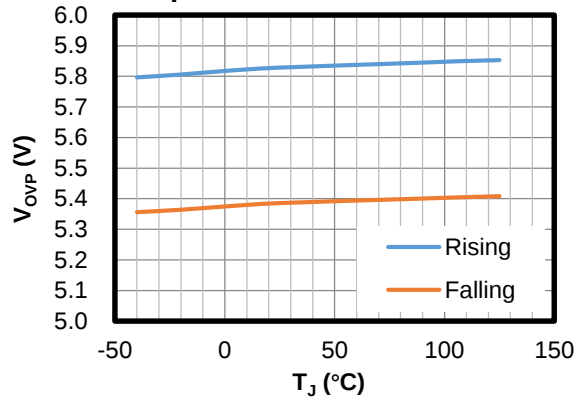


**OVP Hysteresis vs. Junction Temperature**

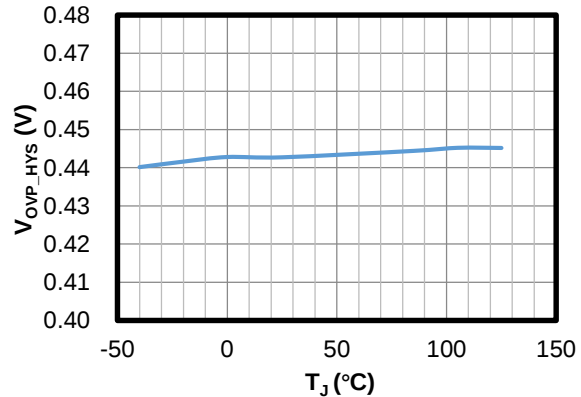

# TYPICAL CHARACTERISTICS (continued)

$V_{CC} = 5V$ ,  $T_J = -40^{\circ}C$  to  $+125^{\circ}C$ , unless otherwise noted.

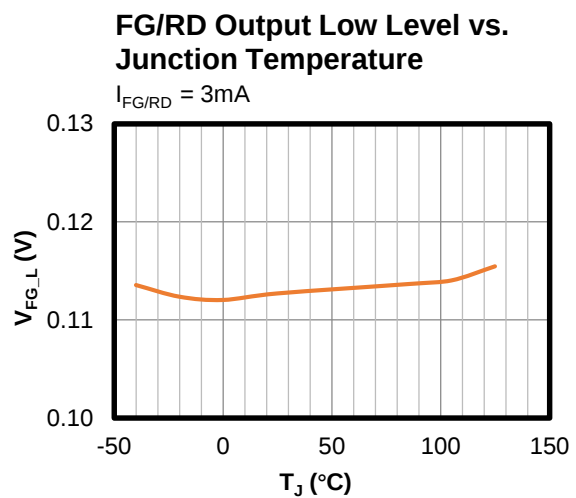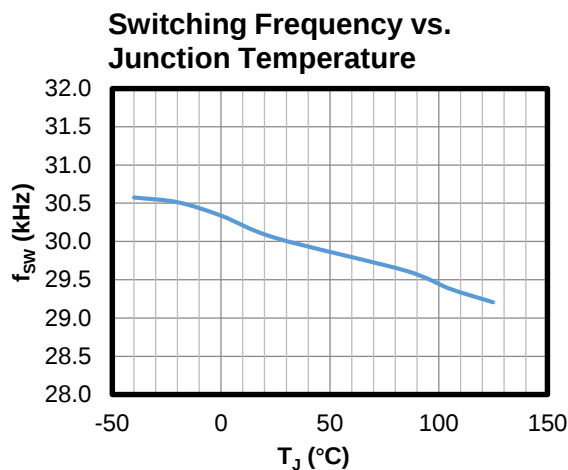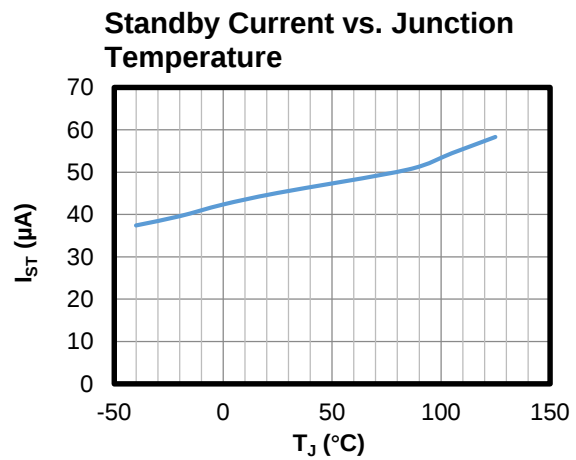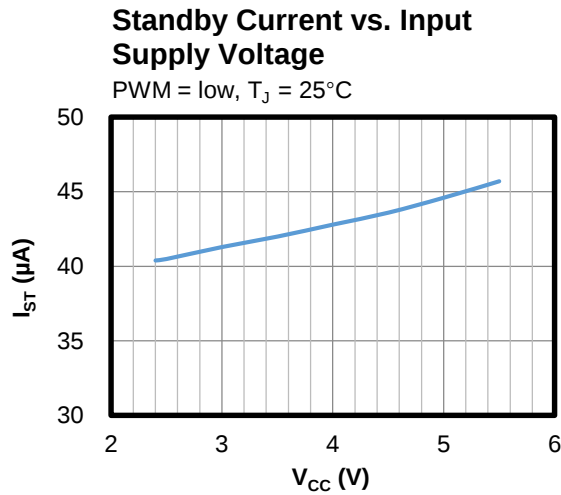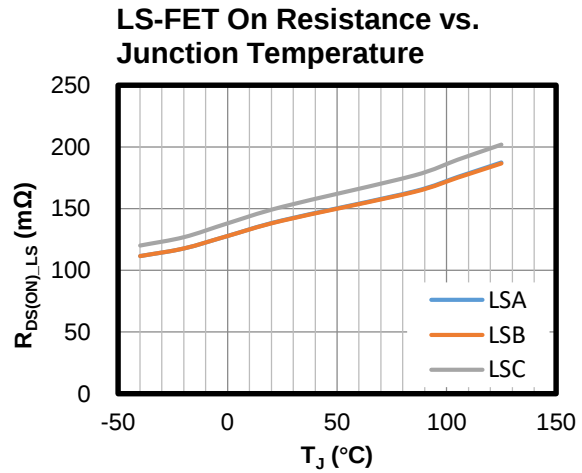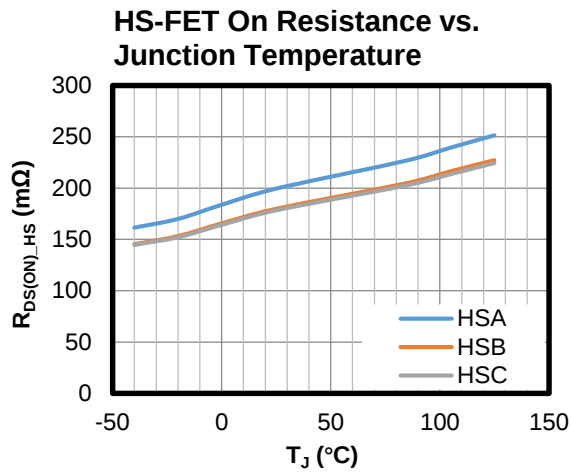


## TYPICAL PERFORMANCE CHARACTERISTICS

Performance waveforms are tested on the evaluation board. SS pin floating,  $V_{IN} = 5V$ ,  $f_{PWM} = 20kHz$ ,  $T_A = 25^{\circ}C$ , unless otherwise noted.


### Steady State

Input PWM duty cycle = 100%

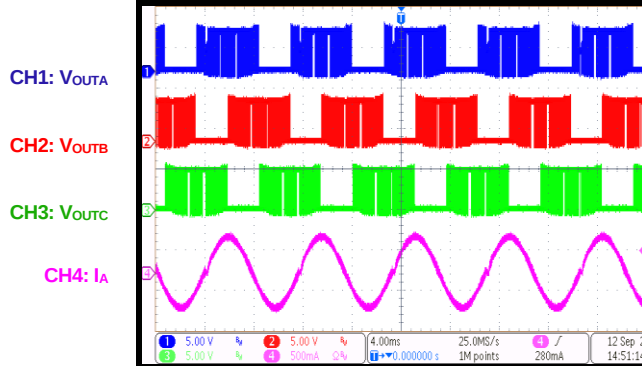


### Steady State

Input PWM duty cycle = 50%

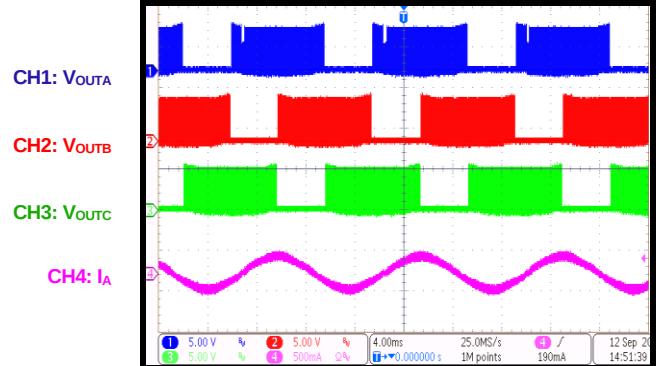


### PWM Duty Transient Response

Input PWM duty cycle = 100% to 25%

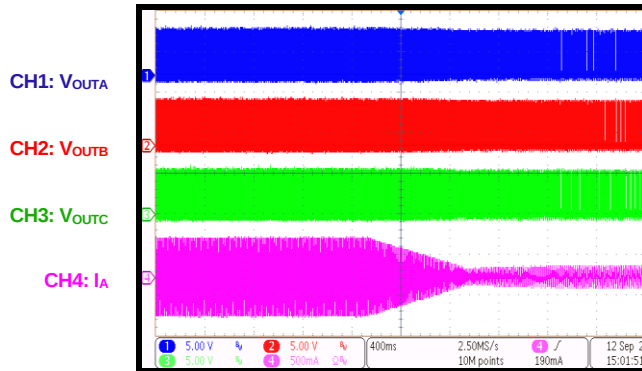


### PWM Duty Transient Response

Input PWM duty cycle = 25% to 100%

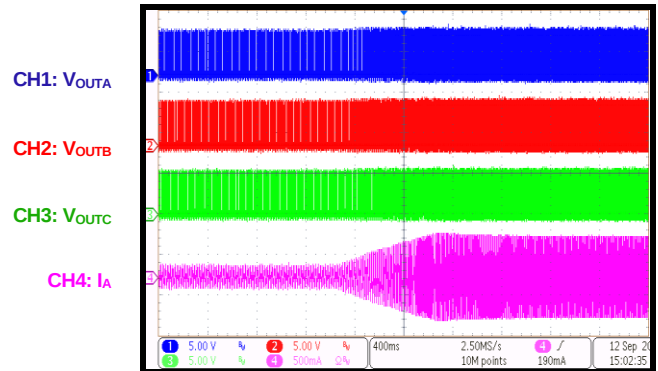


### PWM On

Input PWM duty cycle = 1% to 100%

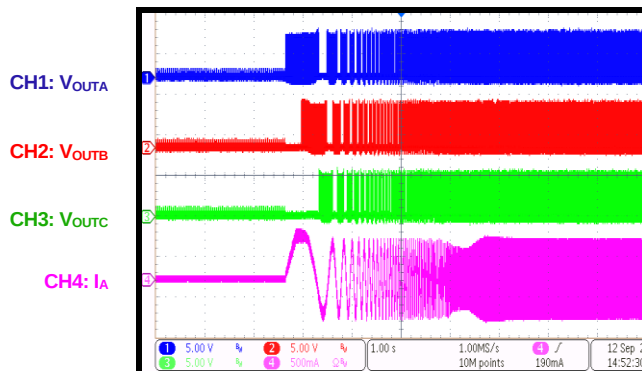

### PWM Off

Input PWM duty cycle = 100% to 1%

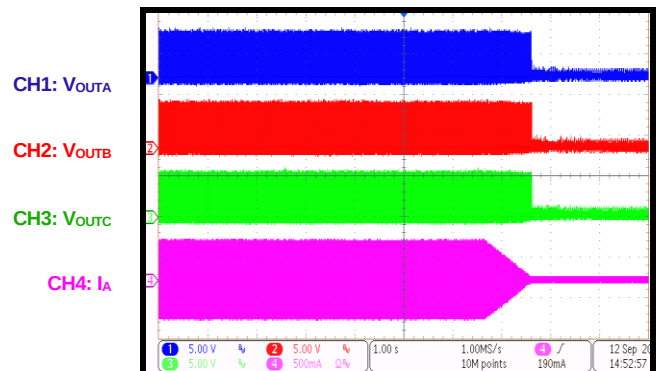


## TYPICAL PERFORMANCE CHARACTERISTICS *(continued)*

Performance waveforms are tested on the evaluation board. SS pin floating,  $V_{IN} = 5V$ ,  $f_{PWM} = 20kHz$ ,  $T_A = 25^{\circ}C$ , unless otherwise noted.


### Start-Up

$V_{CC} = 0V$  to  $5V$

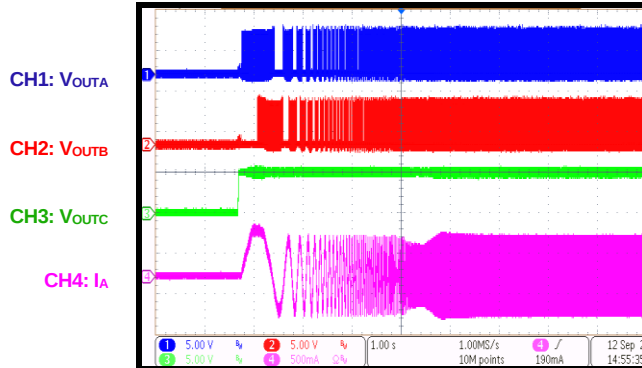


### Shutdown

$V_{CC} = 5V$  to  $0V$

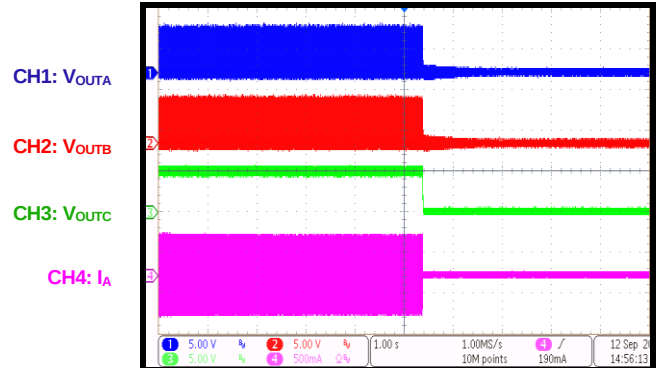

### Rotor Lock and Retry

Lock rotor, then release

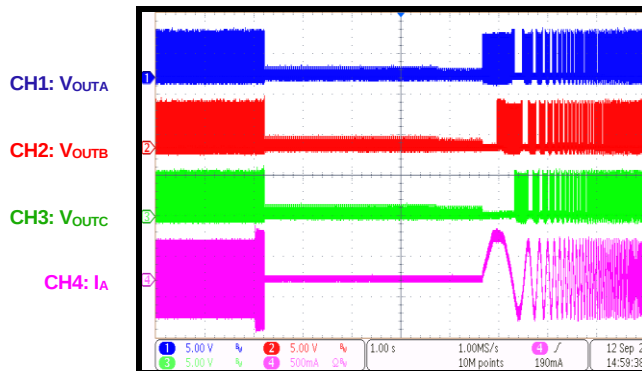

# FUNCTIONAL BLOCK DIAGRAM

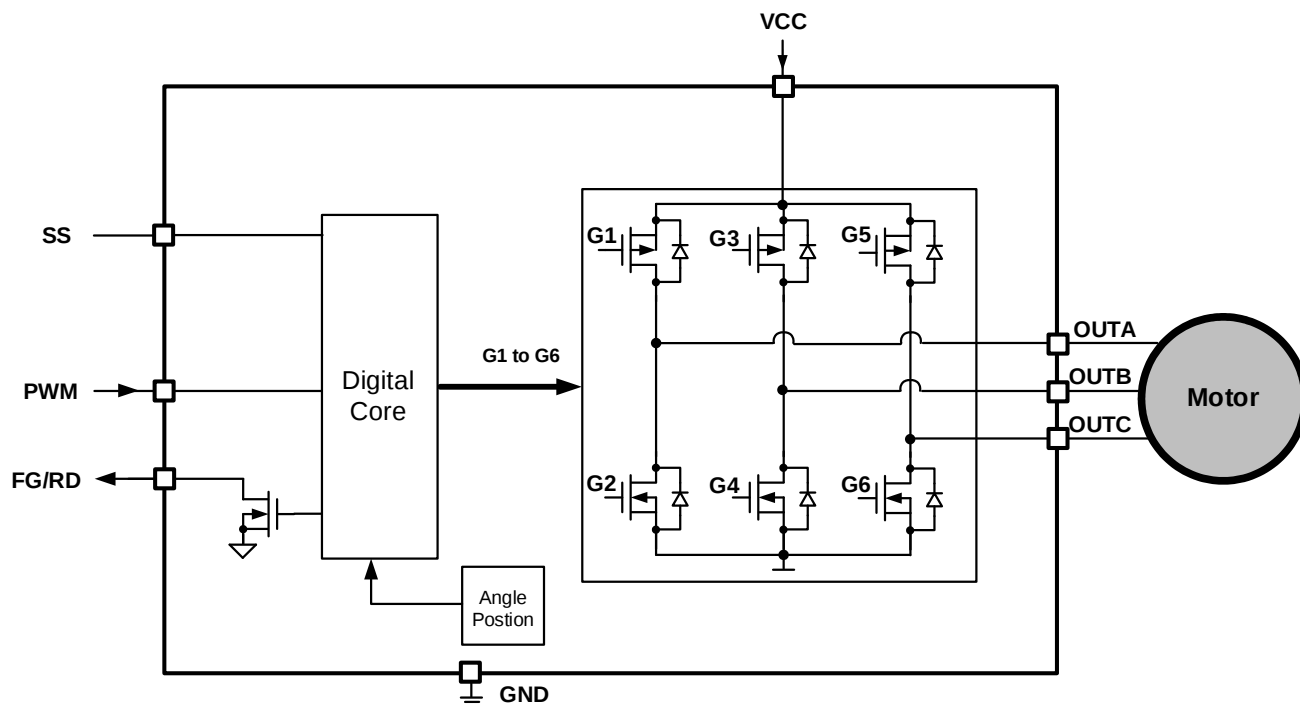


Figure 1: Functional Block Diagram

## OPERATION


The MP6637 is a three-phase, sensorless, brushless DC (BLDC) motor driver with integrated power MOSFETs. It features sinusoidal sensorless control for better efficiency and low vibration, with up to 1.3A of peak phase current. The input voltage ( $V_{CC}$ ) ranges from 2.5V to 5.5V.

### Speed Control

The speed is controlled via the input pulse-width-modulation (PWM) signal applied on the PWM pin. The input PWM signal frequency ranges from 1kHz to 100kHz. The input duty cycle determines the output duty cycle.


### Starting Duty

The starting duty cycle is configured via `CURVE_WINDOW_PWM_DUTY` (01h), bits[2:0]. If the input PWM duty cycle falls below the duty cycle set by these bits, the MP6637 stops switching. If the input PWM duty cycle exceeds `DIN_MIN`[2:0] + 1.2% (hysteresis), the MP6637 starts the output duty cycle and the motor starts rotating (see Figure 2). The default starting duty cycle is 12.5%.

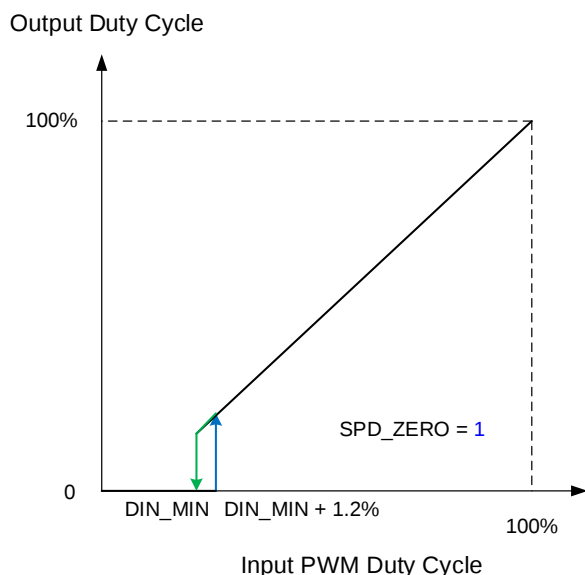

**Figure 2: Starting Duty when SPD\_ZERO = 1**

When `SPD_ZERO = 0`, the MP6637 maintains the minimum speed when the input PWM duty cycle falls below the duty cycle set via `CURVE_WINDOW_PWM_DUTY` (01h), bits[2:0] (see Figure 3).

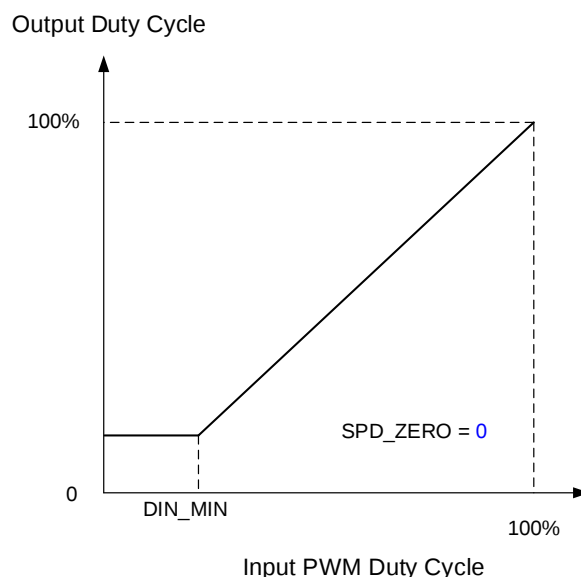

**Figure 3: Minimum Speed when SPD\_ZERO = 0**

### Open-Loop Acceleration Start-Up

After  $V_{CC}$  powers up, the MP6637 increases the driven vector's frequency to accelerate the motor. The acceleration slew rate is selected via register `SOFT_START` (00h), bits[3:2] or the SS pin. When the motor speed reaches the set threshold, the device enters sinusoidal sensorless control.

### Soft Dynamic

After entering sinusoidal sensorless control, the MP6637's output duty cycle reaches its target smoothly depending on the soft-start time ( $t_{SS}$ ).  $t_{SS}$  is configured via the SS pin or register `SOFT_START` (00h), bits[5:4].

### Steady State

In steady-state operation, the device selects sensorless sinusoidal control. To obtain the motor position, the device detects the motor's back electromotive force (BEMF) zero-crossing, then drives the motor with a sinusoidal drive based on the rotor position.

### Standby Mode

If  $V_{CC}$  exceeds the under-voltage lockout (UVLO) rising threshold and the PWM pin is pulled low, the MP6637 enters standby mode. The device exits standby mode when it detects the PWM input signal or the power is cycled.

## Soft Start (SS) Selection

Connect a resistor between the SS and GND pins to select different open-loop acceleration start-up settings and  $t_{SS}$ . SS can be configured via SS resistor or internal register settings. If the SS resistor is not connected, the SS pin floats, then follows the settings set via the internal registers. Table 1 shows the start-up settings with different SS resistances.

**Table 1: Start-Up Settings with Different SS Resistances**

| R <sub>SS</sub> | OC_VF                                                                      | VF_TAR | F_SLEW | T_SS |
|-----------------|----------------------------------------------------------------------------|--------|--------|------|
| ≤1kΩ            | 1/4 × I <sub>OC</sub> P                                                    | 20Hz   | 59Hz   | 2.2s |
| 1.9kΩ           | 1/4 × I <sub>OC</sub> P                                                    | 39Hz   | 59Hz   | 2.2s |
| 3kΩ             | 1/4 × I <sub>OC</sub> P                                                    | 78Hz   | 59Hz   | 2.2s |
| 4.7kΩ           | 1/4 × I <sub>OC</sub> P                                                    | 20Hz   | 234Hz  | 1.1s |
| 7.2kΩ           | 1/4 × I <sub>OC</sub> P                                                    | 39Hz   | 234Hz  | 1.1s |
| 10kΩ            | 1/4 × I <sub>OC</sub> P                                                    | 78Hz   | 234Hz  | 1.1s |
| 16kΩ            | 1/4 × I <sub>OC</sub> P                                                    | 78Hz   | 938Hz  | 1.1s |
| 26kΩ            | 1/4 × I <sub>OC</sub> P                                                    | 156Hz  | 938Hz  | 1.1s |
| Float           | Follow internal register setting,<br>Below is the default register setting |        |        |      |
|                 | 1/2 × I <sub>OC</sub> P                                                    | 39Hz   | 59Hz   | 1.1s |

OC\_VF sets the current limit during open-loop acceleration. A higher value means a higher start-up torque.

VF\_TAR sets the hand-off threshold speed from open-loop acceleration to sensorless sinusoid control. A higher value means open-loop acceleration lasts longer.

F\_SLEW sets the frequency slew rate target during open-loop acceleration. A higher value provides a faster start-up and frequency increase rate.

T\_SS sets  $t_{SS}$ . The time duration that outputs the duty cycle goes from 0% to 100%.

## Rotor Speed (FG) and Rotor Lock Indication (RD)

The FG/RD pin is an open-drain output, and must be pulled up externally via an external resistor.

If FGRD = 0, the FG/RD pin is configured for speed indication (FG), and outputs 1 cycle during each electrical cycle.

If FGRD = 1, the FG/RD pin is configured for locked-rotor protection (RD). If locked-rotor protection is triggered, the FG/RD pin has a high output.

## Protections

The MP6637 features rich protection features, such as short-circuit protection (SCP), over-voltage protection (OVP), UVLO, over-current protection (OCP), and over-temperature protection (OTP).

### Short-Circuit Protection (SCP)

The MP6637 employs internal overload protection by detecting the current flowing through each MOSFET. If the current flowing through any MOSFET exceeds the protection threshold (typically 1.9A), all MOSFETs turn off immediately after a set blanking time. After a lock-retry time, the IC attempts to restart and resume normal operation.

### Over-Current Protection (OCP)

During normal switching, if the current flowing through any MOSFET exceeds the threshold (typically 1.3A) after a set blanking time, the output duty cycle decreases to limit the load current.

### Thermal Shutdown (TSD)

The MP6637 employs thermal monitoring. If the die temperature exceeds 150°C, all MOSFETs turn off. Once the die temperature drops to its low threshold (typically 130°C), the IC restarts and resumes normal operation.

### Under-Voltage Lockout (UVLO)

If  $V_{CC}$  falls below the UVLO threshold, all device circuitries are disabled and the internal logic resets. Once  $V_{CC}$  exceeds the UVLO threshold again, the device restarts and resumes normal operation.

### Locked-Rotor Protection (RD)

If RD protection triggers, the device turns off all MOSFETs. After a lock-retry time (typically 4.4s), the IC attempts to resume normal operation.

### Over-Voltage Protection (OVP)

The MP6637 features input OVP. If  $V_{CC}$  exceeds the OVP threshold (typically 5.8V), all MOSFETs turn off. Once  $V_{CC}$  drops below 5.3V, the IC attempts to restart and resume normal operation. OVP can be disabled via register WINDOW\_START\_OVP\_FGRD, bit[1].

## REGISTER DESCRIPTION

| Add              | D[7]      | D[6]     | D[5]      | D[4]     | D[3]     | D[2]         | D[1]  | D[0] |
|------------------|-----------|----------|-----------|----------|----------|--------------|-------|------|
| 00h<br>(OTP/REG) | OC_VF     |          | T_SS      |          | F_SLEW   |              | F_TAR |      |
| 01h<br>(OTP/REG) | VOL       | PWM_POL  | WD_BLK    | WD_ANG   | SPD_ZERO | DIN_MIN[2:0] |       |      |
| 02h<br>(OTP/REG) | WD_BLK_MD | QUICK_ST | BEMF_SAMP | RESERVED |          |              | OVP   | FGRD |

**Note:**

5) Ensure that  $V_{CC} = 6.5V$  when configuring OTP (one-time-program).

### SOFT\_START (00h)

The SOFT\_START command configures the start-up parameters.

| Bits | Access | Bit Name | Default | Description                                                                                                                                                                   |
|------|--------|----------|---------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7:6  | R/W    | OC_VF    | 10      | Sets the current limit threshold during open-loop acceleration.<br>00: $1/4 \times I_{OCP}$<br>01: $1/4 \times I_{OCP}$<br>10: $1/2 \times I_{OCP}$<br>11: $1 \times I_{OCP}$ |
| 5:4  | R/W    | T_SS     | 11      | Sets the soft-start time ( $t_{ss}$ ). The time duration that outputs the duty cycle goes from 0% to 100%.<br>00: 8.7s<br>01: 4.4s<br>10: 2.2s<br>11: 1.1s                    |
| 3:2  | R/W    | F_SLEW   | 01      | Sets the frequency slew rate during open-loop acceleration. The start-up is faster with a higher value.<br>00: 15Hz<br>01: 59Hz<br>10: 234Hz<br>11: 938Hz                     |
| 1:0  | R/W    | F_TAR    | 01      | Sets the target electrical speed in open-loop acceleration.<br>00: 20Hz<br>01: 39Hz<br>10: 78Hz<br>11: 156Hz                                                                  |

### CURVE\_WINDOW\_PWM\_DUTY (01h)

The CURVE\_WINDOW\_PWM\_DUTY command configures the starting duty cycle, PWM input polarity, detection window, and duty cycle limit.

| Bits | Access | Bit Name | Default | Description                                                                       |
|------|--------|----------|---------|-----------------------------------------------------------------------------------|
| 7    | R/W    | VOL      | 0       | Sets the duty cycle limit during open-loop acceleration.<br>0: 87.5%<br>1: 50%    |
| 6    | R/W    | PWM_POL  | 0       | Selects the PWM pin polarity.<br>0: Positive duty cycle<br>1: Negative duty cycle |

|     |     |              |     |                                                                                                                                                                                                           |
|-----|-----|--------------|-----|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 5   | R/W | WD_BLK       | 0   | Selects the BEMF detection window blanking time.<br>0: 33μs<br>1: 100μs                                                                                                                                   |
| 4   | R/W | WD_ANG       | 1   | Selects the BEMF detection window.<br>0: 30°<br>1: 15°                                                                                                                                                    |
| 3   | R/W | SPD_ZERO     | 1   | Enables zero speed.<br>0: Keeps the minimum speed when the input duty cycle is below the duty cycle set by DIN_MIN[2:0]<br>1: Stops when the input duty cycle is below the duty cycle set by DIN_MIN[2:0] |
| 2:0 | R/W | DIN_MIN[2:0] | 010 | Sets the starting duty cycle.<br>000: 6.25%<br>001: 9.375%<br>010: 12.5% (default)<br>011: 15.625%<br>100: 18.75%<br>101: 21.875%<br>110: 25%<br>111: 28.125%                                             |

#### WINDOW\_START\_OVP\_FGRD (02h)

The WINDOW\_START\_OVP\_FGRD command configures the BEMF window, quick start-up, over-voltage protection (OVP), and the FG/RD pin.

| Bits | Access | Bit Name  | Default | Description                                                                                                                                                |
|------|--------|-----------|---------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7    | R/W    | WD_BLK_MD | 0       | Selects the BEMF blanking time mode.<br>0: Auto<br>1: Fixed time                                                                                           |
| 6    | R/W    | QUICK_ST  | 0       | Enables quick start-up. When QUICK_ST is set to 1, enables quick start-up with a faster alignment and open-loop acceleration.<br>0: Disabled<br>1: Enabled |
| 5    | R/W    | BEMF_SAMP | 0       | Sets the BEMF detection activation.<br>0: During the BEMF detection window<br>1: At the end of the BEMF detection window                                   |
| 4:2  | -      | RESERVED  | 001     | Reserved.                                                                                                                                                  |
| 1    | R/W    | OVP       | 0       | Enables input over-voltage protection (OVP).<br>0: OVP is enabled<br>1: OVP is disabled                                                                    |
| 0    | R/W    | FGRD      | 0       | Selects the FG/RD pin output.<br>0: FG/RD pin outputs FG, 1 pulse in each electrical cycle<br>1: FG/RD pin outputs RD                                      |

## APPLICATION INFORMATION

### Selecting an Input Capacitor

Place an input capacitor ( $C_{IN}$ ) as close to the VCC and GND pins as possible to maintain a stable input voltage ( $V_{CC}$ ) and reduce noise at the input.  $C_{IN}$  must have a low impedance at  $f_{SW}$ .

Ceramic capacitors with X7R dielectrics are recommended for their low ESR characteristics. The effective capacitance decreases when the voltage across the ceramic capacitor increases. If the ceramic capacitor is biased with its voltage rating, the effective capacitance falls below 50%. Ensure that enough capacitance is applied.

Ensure the voltage rating of the ceramic capacitor is high enough to guarantee no over-voltage rating events.

### Input Clamping TVS Diode

High-voltage spikes are caused by the energy stored in the motor charging back to the side of  $C_{IN}$ . To avoid these spikes, add a voltage-clamping transient voltage suppressor (TVS) diode or Zener diode. For a 5V application, a 6V/SOD-123 package TVS or Zener diode is sufficient.

### Selecting an SS Resistor

The start-up setting can be configured via the internal registers or the SS resistor.

Float the SS pin if the internal registers are used for the start-up settings. Otherwise, the SS setting follows the SS resistor setting.

Different resistances set different start-up values to meet different application requirements. See Table 1 on page 11 for the selection of SS resistors.

### FG Glitch during Start-Up

The FG/RD pin is an open-drain output. After UVLO, the FG/RD pin is pulled low. An FG glitch may occur during  $V_{CC}$  power-up.

To eliminate the FG signal glitch, a delay circuit is recommended. Combining  $C1$  and  $R1$  with the PNP transistor ( $Q1$ ) generates a delay when the FG pin is pulled up (see Figure 4).

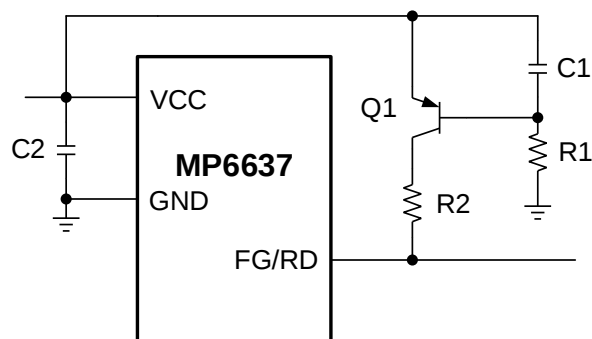


Figure 4: FG Glitch Delay Circuit

The delay circuit is active only when  $V_{CC}$  powers up.

The delay time changes with different  $C1$  and  $R1$  values for different applications. Typically,  $1\mu F$  to  $2.2\mu F$  for  $C1$  and  $100k\Omega$  for  $R1$  provides enough delay for most applications.

### PCB Layout Guidelines

Efficient PCB layout is critical for stable operation and to avoid noise effects on the functions. For the best results, refer to Figure 5 and follow the guidelines below:

1. Place the input capacitor ( $C_{IN}$ ) as close to the VCC and GND pins as possible to minimize the switching loop area. A small-sized ceramic capacitor ( $C1$ ) is recommended to improve high-frequency noise performance.
2. If the SS resistor is applied, place the SS resistor close to the SS and GND pins. The SS resistor's ground loop trace keeps away from power loop trace.

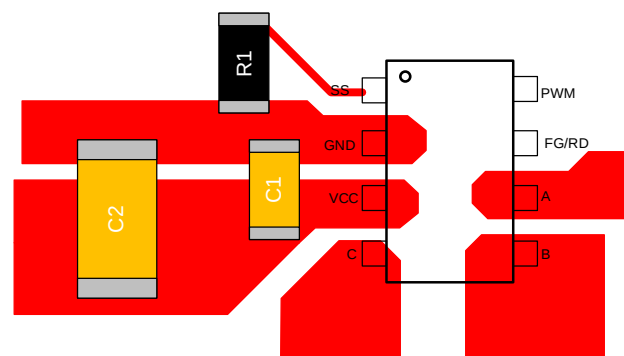


Figure 5: PCB Layout

# TYPICAL APPLICATION CIRCUITS

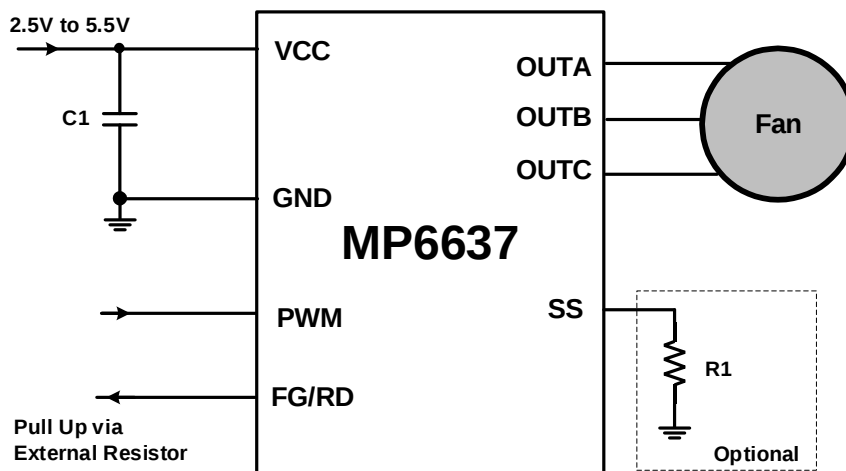


Figure 6: Typical Application Circuit


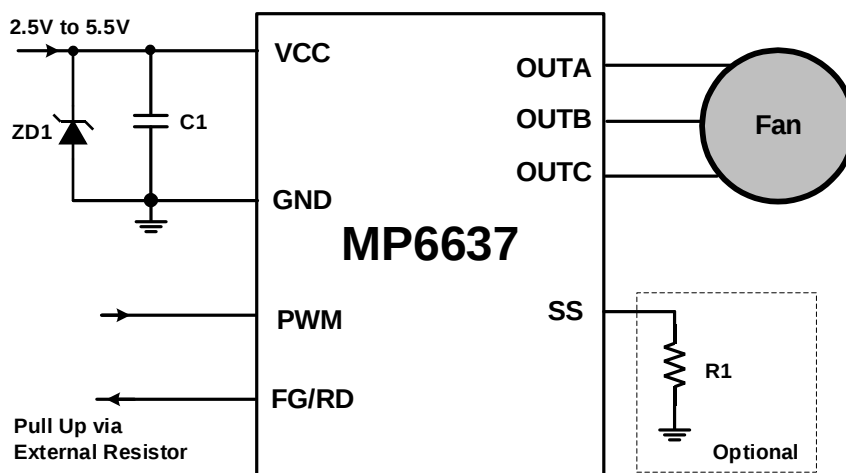



Figure 7: Typical Application Circuit with Input Clamping

# PACKAGE INFORMATION


## SOT583

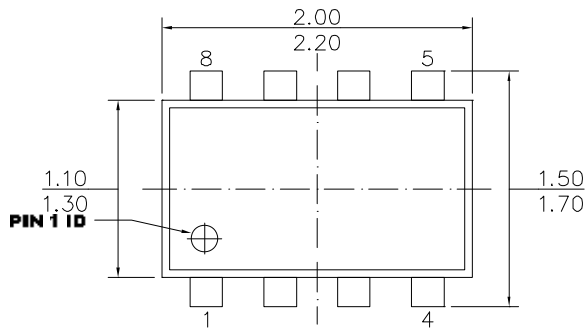


**TOP VIEW**

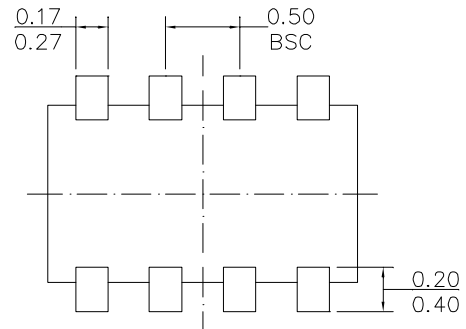


**BOTTOM VIEW**



**FRONT VIEW**

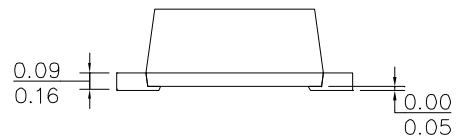

**SIDE VIEW**

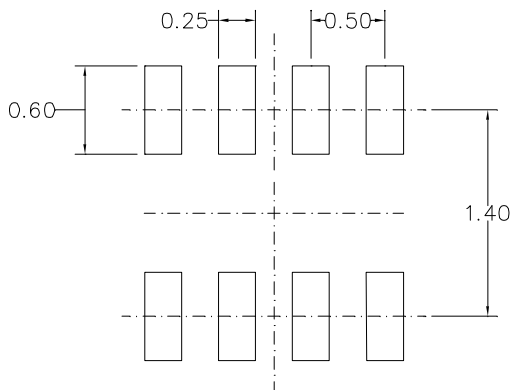


**RECOMMENDED LAND PATTERN**

### NOTE:

- 1) ALL DIMENSIONS ARE IN MILLIMETERS.
- 2) PACKAGE WIDTH DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSION.
- 3) LEAD COPLANARITY (BOTTOM OF LEADS AFTER FORMING) SHALL BE 0.10 MILLIMETERS MAX.
- 4) DRAWING IS NOT TO SCALE.

## CARRIER INFORMATION

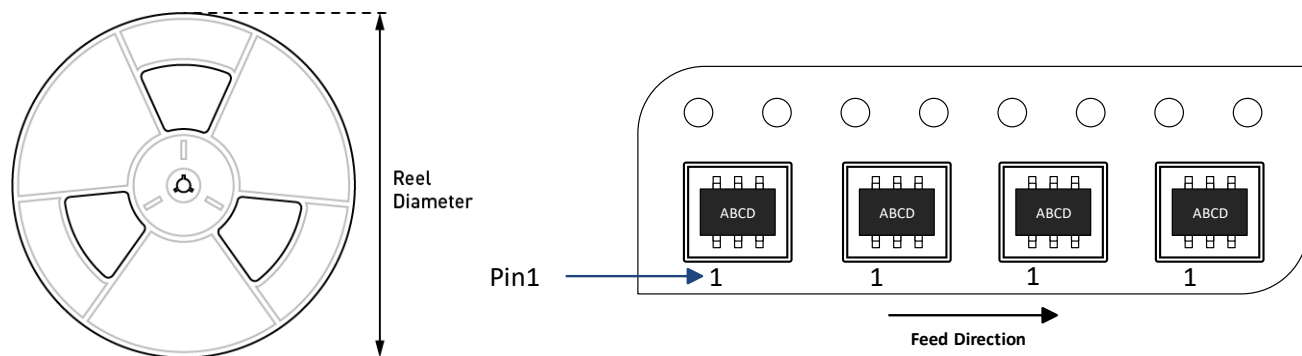

| Part Number      | Package Description | Quantity/ Reel | Quantity/ Tube | Quantity/ Tray | Reel Diameter | Carrier Tape Width | Carrier Tape Pitch |
|------------------|---------------------|----------------|----------------|----------------|---------------|--------------------|--------------------|
| MP6637GTL-xxxx-Z | SOT583              | 5000           | N/A            | N/A            | 7in           | 8mm                | 4mm                |

## REVISION HISTORY

| Revision # | Revision Date | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Pages Updated |
|------------|---------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| 1.0        | 10/21/2024    | Initial Release                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | -             |
| 1.1        | 7/14/2025     | <ul style="list-style-type: none"> <li>Added maximum value of <math>I_{CC}</math>.</li> <li>Added maximum value of <math>V_{PWMH}</math>.</li> <li>Added minimum value of <math>V_{PWML}</math>.</li> <li>Added test condition and minimum and maximum value of <math>I_{OCP}</math>.</li> <li>Added typical value of <math>V_{FG\_L}</math>.</li> <li>Added minimum and maximum value of <math>t_{RE}</math>.</li> <li>Added minimum and maximum value of <math>V_{OVP}</math>.</li> <li>Added minimum and maximum value of <math>V_{OVP\_HYS}</math>.</li> </ul> | 4             |

**Notice:** The information in this document is subject to change without notice. Please contact MPS for current specifications. Users should warrant and guarantee that third-party Intellectual Property rights are not infringed upon when integrating MPS products into any application. MPS will not assume any legal responsibility for any said applications.