

DESCRIPTION

The EV4425M-QB-00A is an evaluation board for the MP/MPQ4425M.

MP/MPQ4425M is a high-efficiency, synchronous, rectified, step-down, switch-mode white LED driver with built-in power MOSFETs. It offers a very compact solution to achieve a 1.5A continuous output current with excellent load and line regulation over a wide input supply range. The MP/MPQ4425M has synchronous mode operation to get high efficiency.

The EV4425M-QB-00A is a fully assembled and tested evaluation board, which generates load current up to 1.5A from a 4V to 36V input range.

ELECTRICAL SPECIFICATIONS

Parameter	Symbol	Value	Units
Input Voltage	V_{IN}	4 – 36	V
Output Current	I_{OUT}	1.5	A

FEATURES

- EMI Reduction Technique
- Wide 4V-to-36V Operating Input Range
- 85mΩ High-Side, 50mΩ Low-Side Internal Power MOSFETs
- High-Efficiency Synchronous Mode Operation
- Default 2.2MHz Switching Frequency
- PWM Dimming (Min 100Hz Dimming Frequency)
- Force CCM Mode
- 0.2V Reference Mode
- Internal Soft-Start
- Fault Indication for LED Short, Open and Thermal Shutdown
- Over-Current Protection (OCP) with Valley-Current Detection
- Proprietary Switching-Loss-Reduction Technology
- Thermal Shutdown
- Available in a QFN-13 (2.5mmx3mm) Package
- CISPR25 Class5 Compliant
- AEC-Q100 Grade-1

APPLICATIONS

- Automotive LED Lighting


All MPS parts are lead-free and adhere to the RoHS directive. For MPS green status, please visit MPS website under Quality Assurance. "MPS" and "The Future of Analog IC Technology" are Registered Trademarks of Monolithic Power Systems, Inc.

EVALUATION BOARD





(L x W x H) 2.5" x 2.5" x 0.4"
(6.4cm x 6.4cm x 1.0cm)

Board Number	MPS IC Number
EV4425M-QB-00A	MP/MPQ4425MGQB

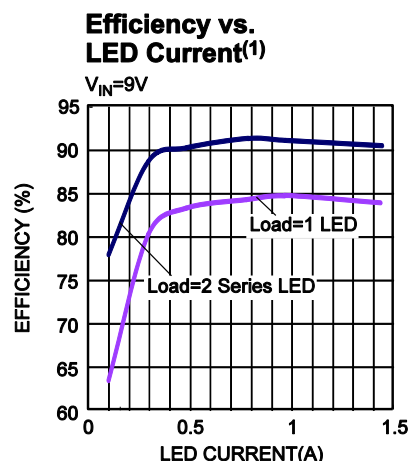







EVALUATION BOARD SCHEMATIC

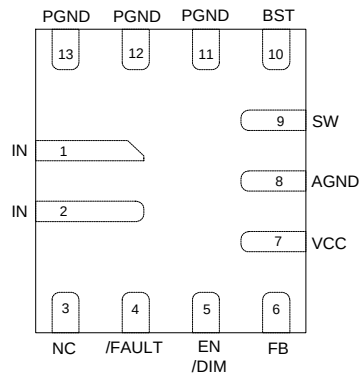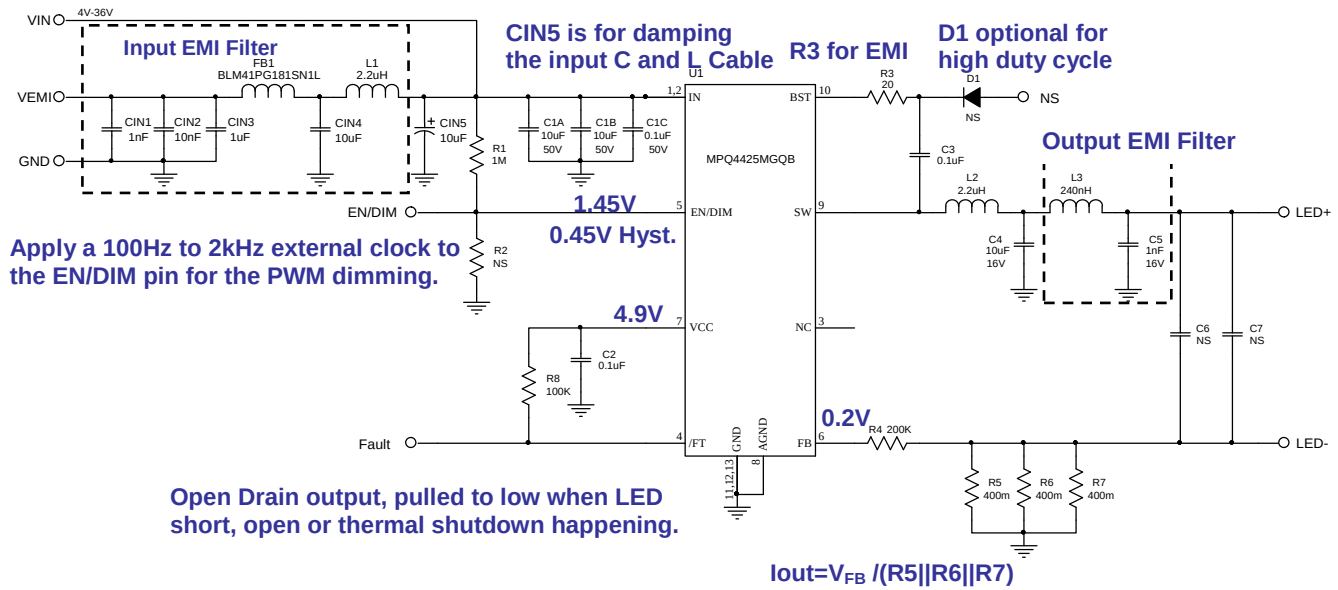

EV4425M-QB-00A BILL OF MATERIALS

Qty	Ref	Value	Description	Package	Manufacturer	Part Number
1	CIN1	1nF	Ceramic Cap., 50V, X7R	0603	muRata	GRM188R71H102KA01D
1	CIN2	10nF	Ceramic Cap., 50V, X7R	0603	muRata	GRM188R71H103KA01D
1	CIN3	1μF	Ceramic Cap., 50V, X7R	1206	muRata	GRM31MR71H105KA88L
2	CIN4, CIN5	10μF	Ceramic Cap., 50V, X7R	1210	muRata	GRM32ER71H106KA12L
2	C1A, C1B	10μF	Ceramic Cap., 50V, X5R	1206	muRata	GRM31CR61H106KA12L
1	C1C	0.1μF	Ceramic Cap., 50V, X7R	0603	muRata	GRM188R71H104KA93D
2	C2, C3	0.1μF	Ceramic Cap., 16V, X7R	0603	muRata	GRM188R71C104KA01D
1	C4	10μF	Ceramic Cap., 16V, X7R	1210	muRata	GRM32DR71C106KA01L
1	C5	1nF	Ceramic Cap., 16V, X7R	0603	muRata	GRM188R71C102KA01D
2	C6, C7	NS				
1	D1	NS				
1	FB1		Bead, 180ohm at 100MHz, 3.5A	1812	muRata	BLM41PG181SN1L
2	L1, L2	2.2μH	Inductor, 82mOhm DCR, 3.3A	SMD	TOKO	DFE252012F-2R2MP2
1	L3	240nH	Inductor, 19mOhm DCR, 5A	SMD	TOKO	DFE201612E-R24MP2
1	R1	1M	Film Res., 5%	0603	Yageo	RC0603JR-071ML
1	R3	20	Film Res., 1%	0603	Yageo	RC0603FR-0720RL
1	R4	200k	Film Res., 1%	0603	Yageo	RC0603FR-07200KL
3	R5, R6, R7	400m	Film Res., 1%	1206	Yageo	RL1206FR-070R4L
1	R8	100k	Film Res., 1%	0603	Yageo	RC0603FR-07100KL
1	R2	NS				
1	U1		Step-Down Regulator	QFN13(2X3)	MPS	MPQ4425MGQB
5	VIN, VEMI, GND, GND, VOUT		2.0 Golden Pin		HZ	
4	PG, GND, EN/DIM, GND		2.54mm Test Pin		HZ	


TYPICAL CHARACTERISTICS

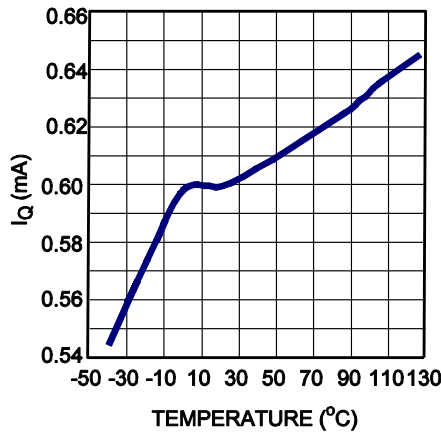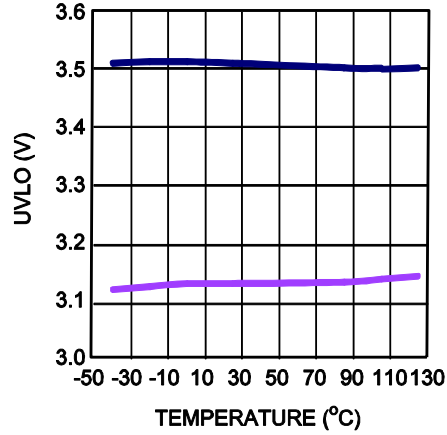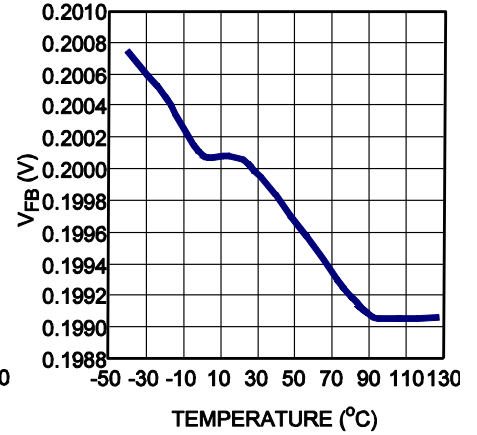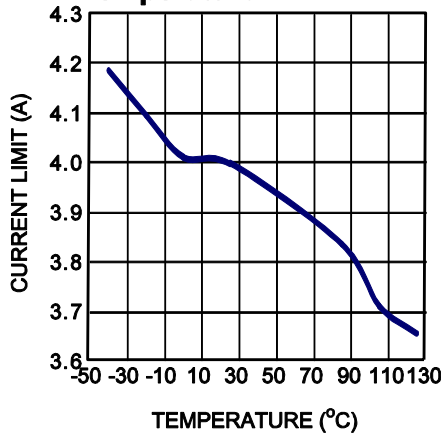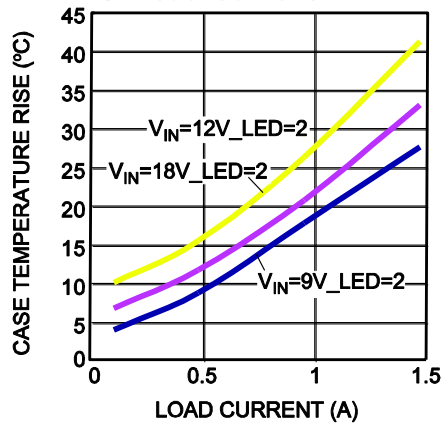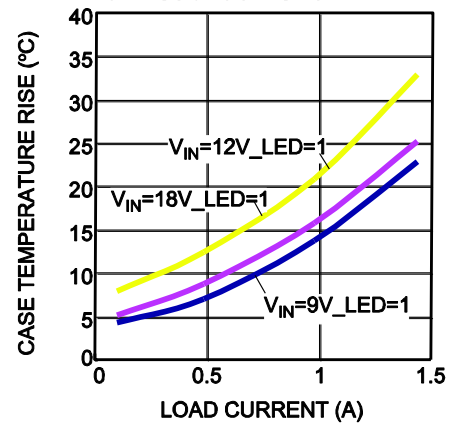 I_Q vs. Temperature

 V_{IN} UVLO vs. Temperature

 V_{FB} vs. Temperature

Current Limit vs. Temperature

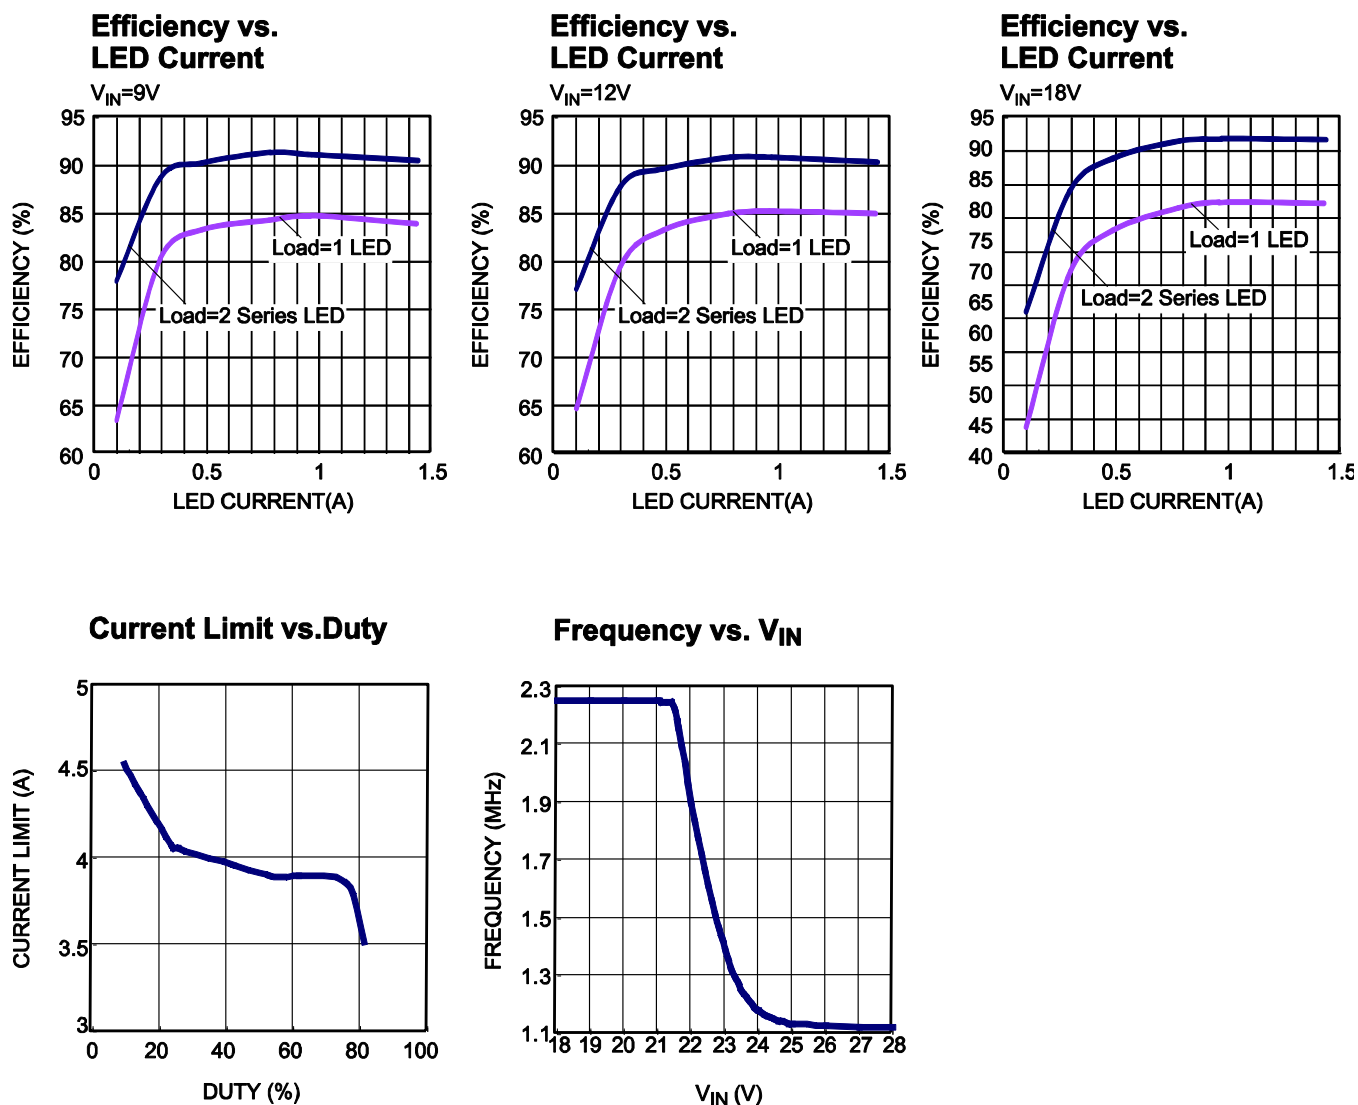Case Temperature Rise vs. Load Current

Case Temperature Rise vs. Load Current


EVB TEST RESULTS

Performance waveforms are tested on the evaluation board.

$V_{IN} = 12V$, LOAD=2 series LED, $L=2.2\mu H$, $F_{SW}=2.2MHz$, $T_A = +25^\circ C$, unless otherwise noted.⁽¹⁾



Note:


1). All the efficiency curves are tested on EVB without input and output filters.

EVB TEST RESULTS *(continued)*


Performance waveforms are tested on the evaluation board.

$V_{IN} = 12V$, LOAD=2 series LED, $I_{LED}=1.5A$, $L=2.2\mu H$, $F_{SW}=2.2MHz$, with EMI filters, $T_A = +25^{\circ}C$, unless otherwise noted. ⁽²⁾


**CISPR25 Class 5 Peak Radiated Emissions
(150kHz-30MHz)**

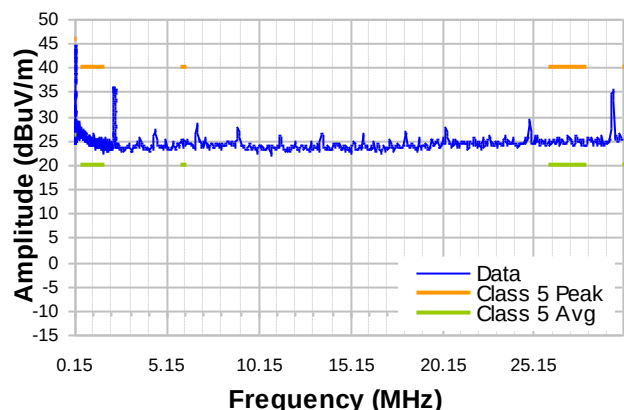


**CISPR25 Class 5 Average Radiated Emissions
(150kHz-30MHz)**

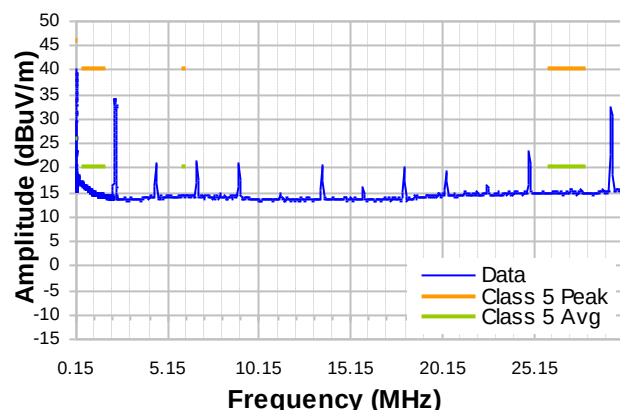


**CISPR25 Class 5 Peak Radiated Emissions
(Vertical, 30MHz-1GHz)**

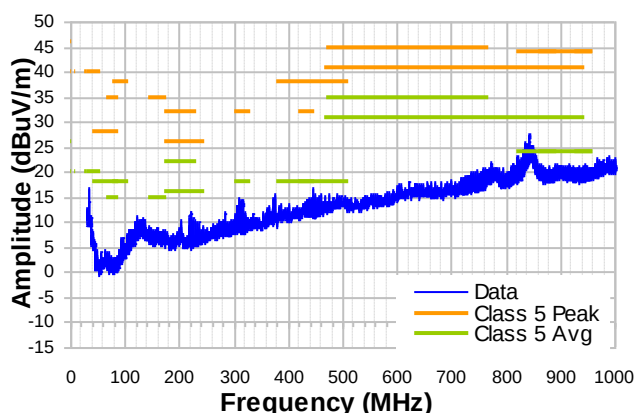


**CISPR25 Class 5 Average Radiated Emissions
(Vertical, 30MHz-1GHz)**

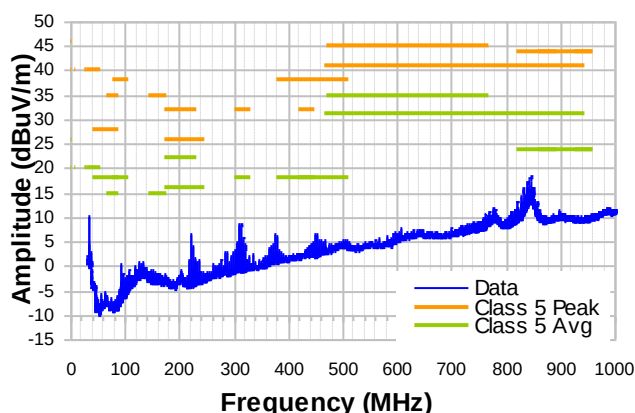

**CISPR25 Class 5 Peak Radiated Emissions
(Horizontal, 30MHz-1GHz)**

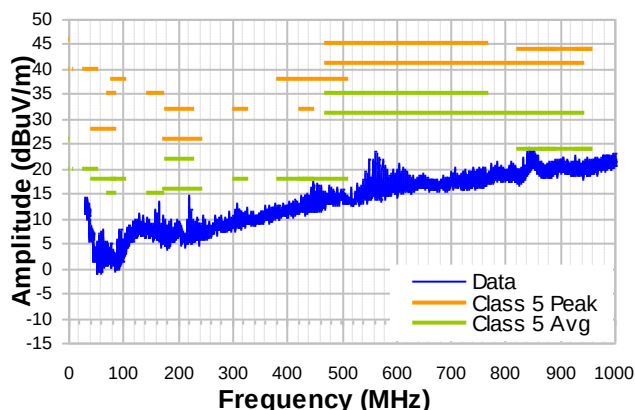

**CISPR25 Class 5 Average Radiated Emissions
(Horizontal, 30MHz-1GHz)**

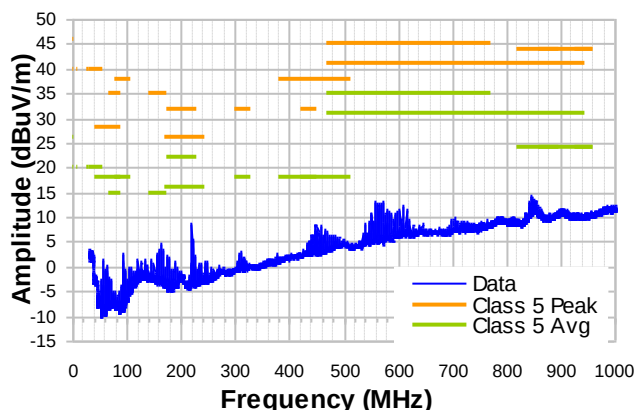


EVB TEST RESULTS *(continued)*


Performance waveforms are tested on the evaluation board.

$V_{IN} = 12V$, LOAD=2 series LED, $I_{LED}=1.5A$, $L=2.2\mu H$, $F_{SW}=2.2MHz$, with EMI filters, $T_A = +25^{\circ}C$, unless otherwise noted. ⁽²⁾

CISPR25 Class5 Peak Conducted Emissions (150kHz-108MHz)

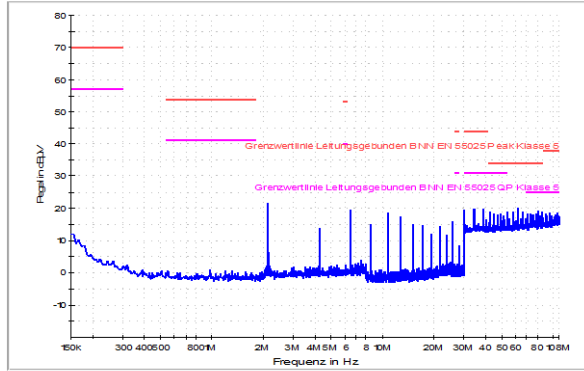

CISPR25 Class5 Average Conducted Emissions (150kHz-108MHz)

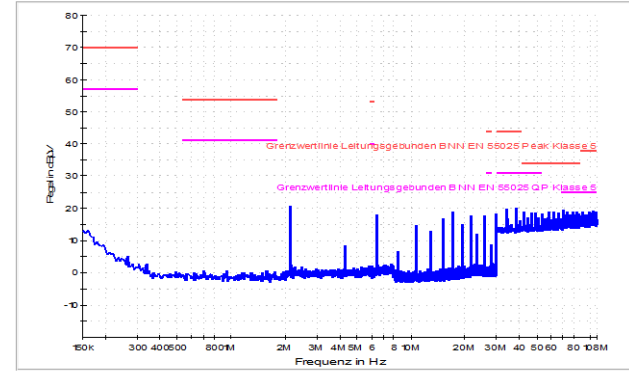

Note:

2). The EMI test results are based on application circuit with input and output EMI filters.


EVB TEST RESULTS *(continued)*

Performance waveforms are tested on the evaluation board.

$V_{IN} = 12V$, LOAD=2 series LED, $L=2.2\mu H$, $F_{SW}=2.2MHz$, $T_A = +25^{\circ}C$, unless otherwise noted.


Steady State

$I_{LED} = 0A$

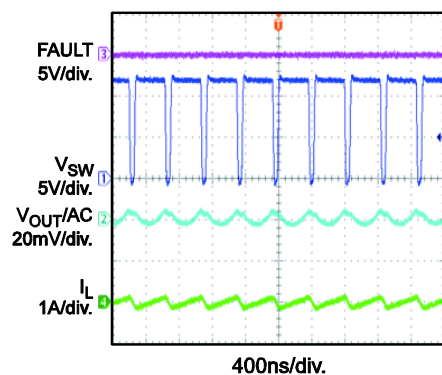


Steady State

$I_{LED} = 1.5A$

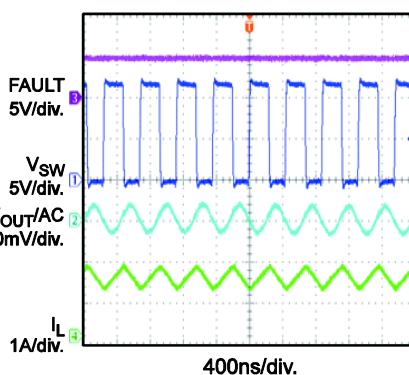


Start-Up through V_{IN}

$I_{LED} = 0A$

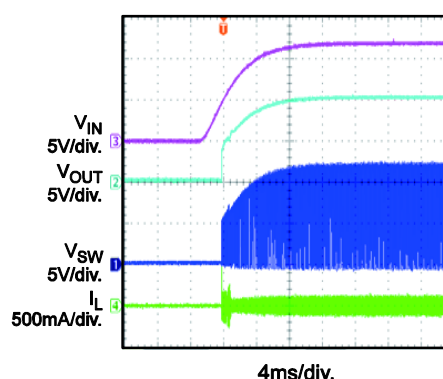


Start-Up through V_{IN}

$I_{LED} = 1.5A$

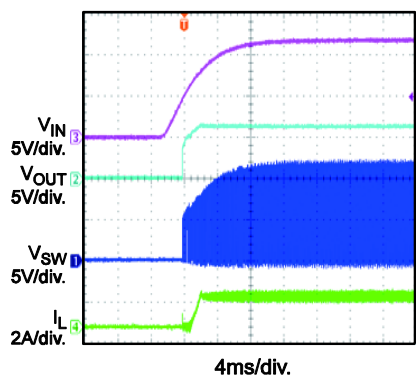


Shutdown through V_{IN}

$I_{LED} = 0A$

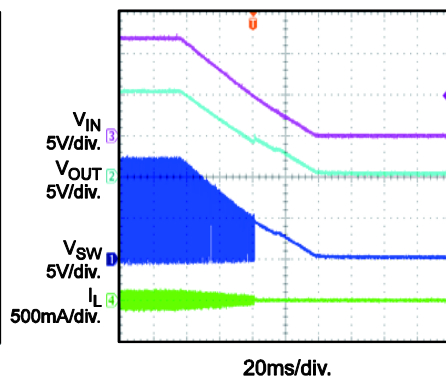


Shutdown through V_{IN}

$I_{LED} = 1.5A$

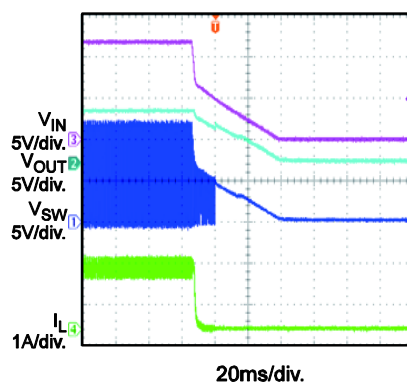


Start-Up through EN

$I_{LED} = 0A$

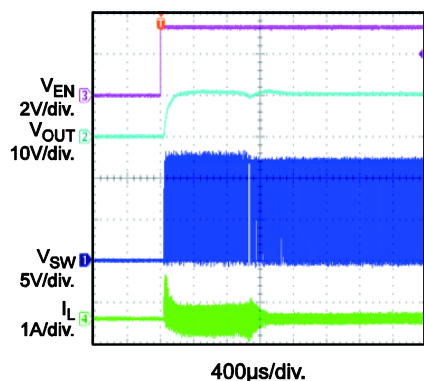


Start-Up through EN

$I_{LED} = 1.5A$

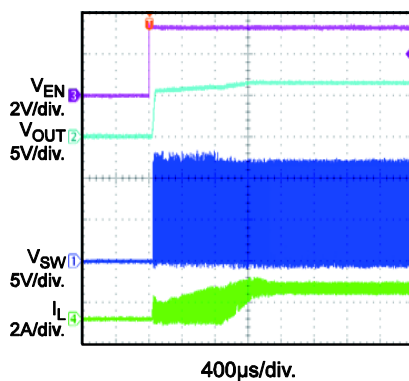

Shutdown through EN

$I_{LED} = 1.5A$

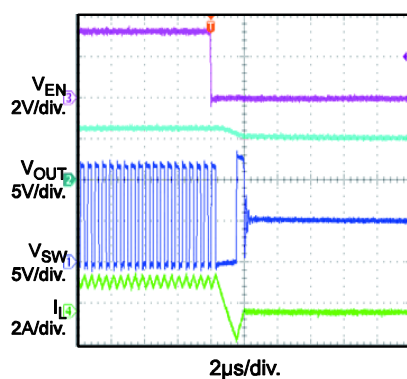


EVB TEST RESULTS *(continued)*


Performance waveforms are tested on the evaluation board.

$V_{IN} = 12V$, $LOAD=2$ series LED, $L=2.2\mu H$, $F_{SW}=2.2MHz$, $T_A = +25^{\circ}C$, unless otherwise noted.


PWM Dimming
400Hz

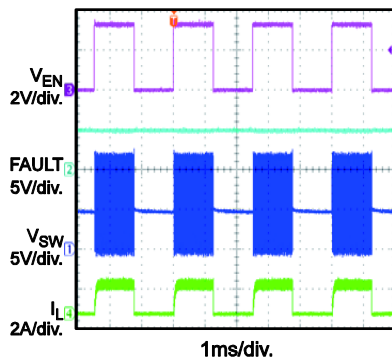


PWM Dimming
2kHz

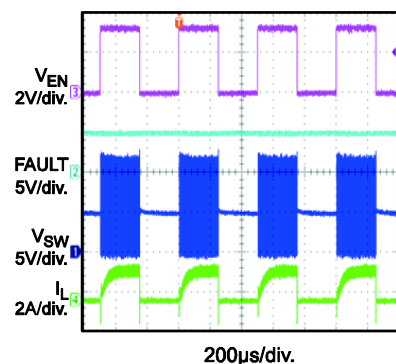


LED+ Short to GND
Steady State

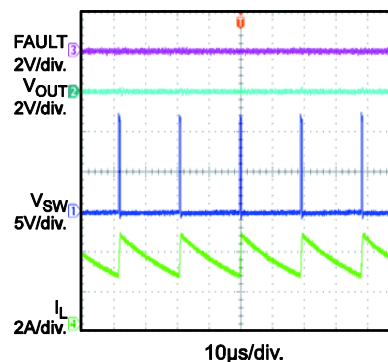


LED+ Short to GND Entry
 $I_{LED} = 0A$

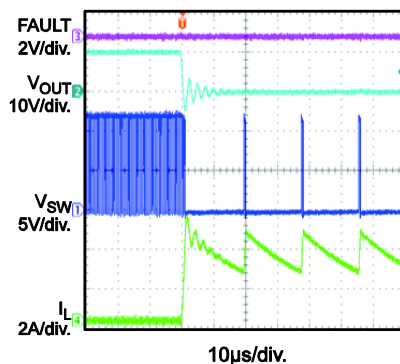


LED+ Short to GND Entry
 $I_{LED} = 1.5A$

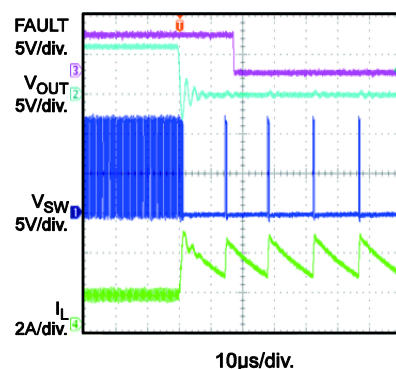


LED+ Short to GND Recovery
 $I_{LED} = 0A$

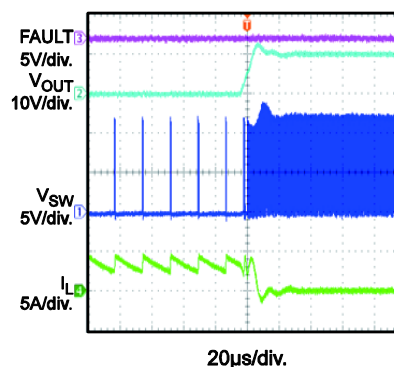


LED+ Short to GND Recovery
 $I_{LED} = 1.5A$

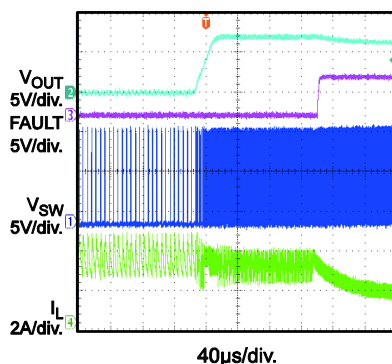

LED+ Short to GND
Input Power On

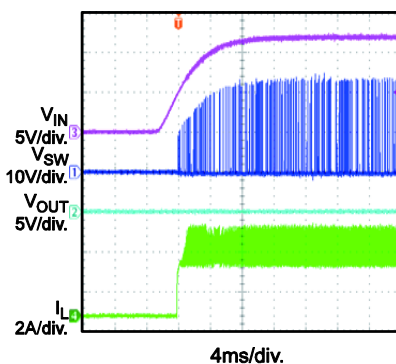







LED+ Short to GND
Input Power Off

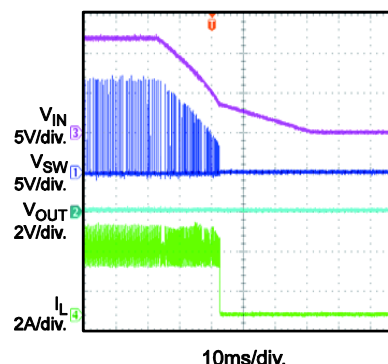

EVB TEST RESULTS *(continued)*

Performance waveforms are tested on the evaluation board.

$V_{IN} = 12V$, $LOAD=2$ series LED, $L=2.2\mu H$, $F_{SW}=2.2MHz$, $T_A = +25^{\circ}C$, unless otherwise noted.

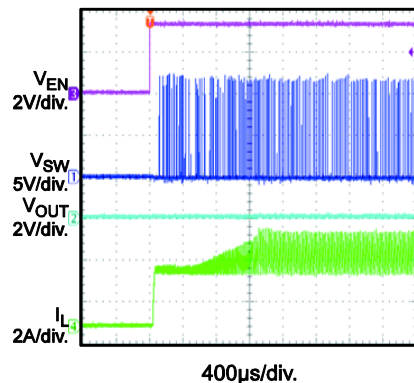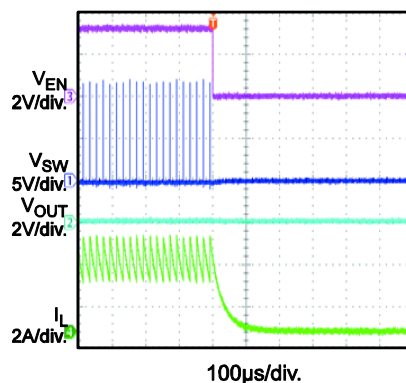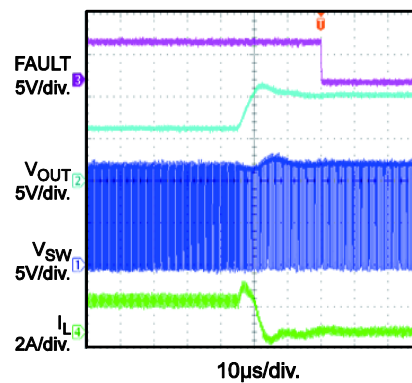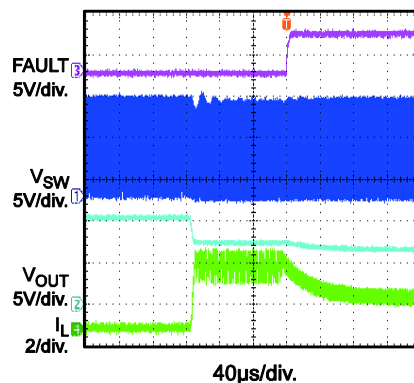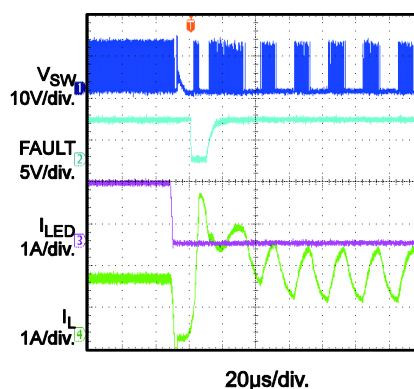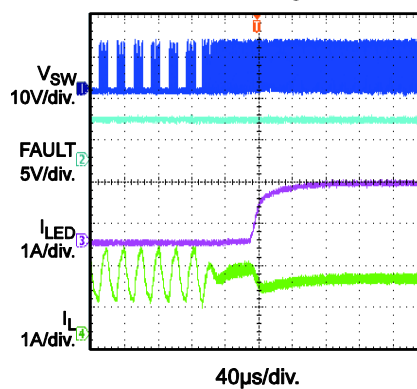LED+ Short to GND EN On

LED+ Short to GND EN Off

LED Open Entry

LED Open Recovery

LED+ and LED- Short Entry

LED+ and LED- Short Recovery


PRINTED CIRCUIT BOARD LAYOUT

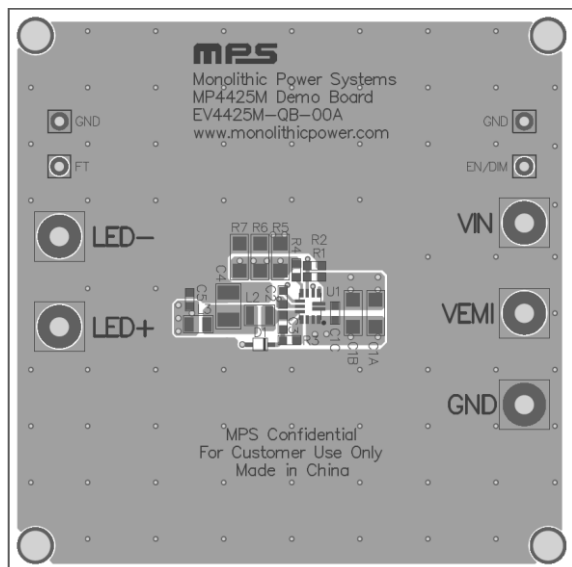


Figure 1—Top Silk Layer and Top Layer

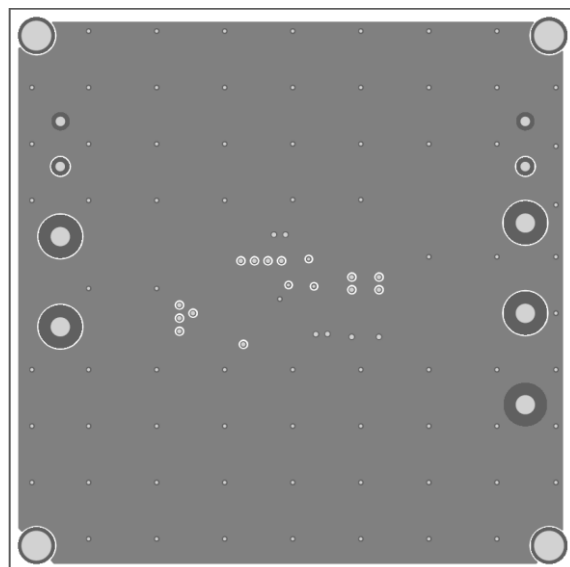


Figure 2—Inner1 Layer

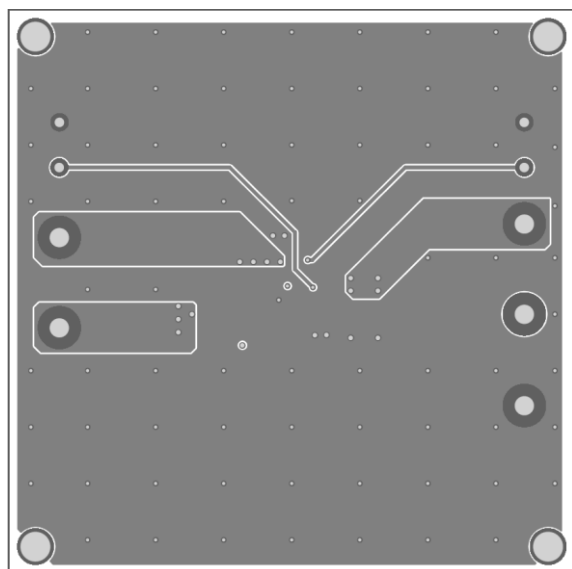


Figure 3—Inner2 Layer


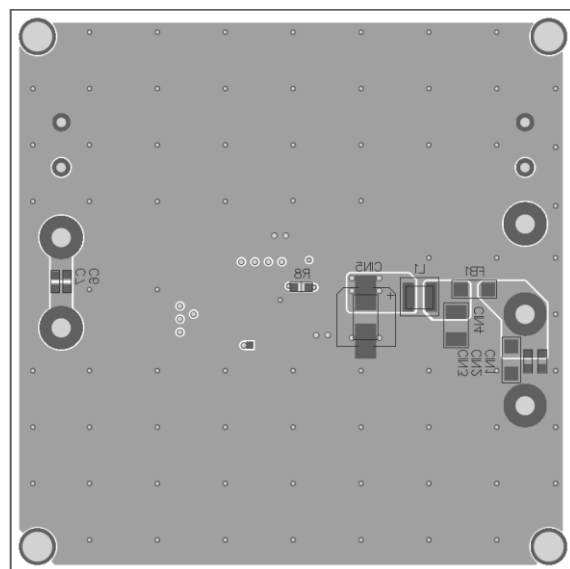


Figure 4—Bottom Silk Layer and Bottom Layer

QUICK START GUIDE

1. Connect the positive and negative terminals of the LED to the LED+ and LED- pins, respectively.
2. Preset the power supply output to between 4 and 36V, and then turn it off.
If longer cables are used between the source and the EVB (>0.5m total), a damping capacitor should be installed at the input terminals. Especially when V_{in} is $\geq 24V$.
3. Connect the positive and negative terminals of the power supply output to the VIN and GND pins, respectively. To get better EMI performance, connect the input power between VEMI and GND.
4. Turn the power supply on. The MP/MPQ4425MGQB will automatically startup.
5. To use the Enable function, apply a digital input to the EN pin. Drive EN higher than 1.45V to turn on the regulator, drive EN less than 1V to turn it off.
6. To use the Dimming function, apply a 100Hz to 2kHz external clock to the EN/DIM pin for the PWM dimming.
7. The output current is set by the external resistor R_{FB} , Feedback reference voltage is 0.2V, I_{LED} is then given by below equation:

$$I_{LED} = \frac{0.2V}{R_{FB}}$$



8. R_T is used to set the loop bandwidth. Basically, lower R_T , higher bandwidth. But high bandwidth may cause insufficient phase margin, resulting in loop unstable. So a proper value of R_T is needed to make a trade-off between bandwidth and phase margin. Below table lists the recommended feedback resistor and R_T values for common output with 1 or 2 series LED.

I_{LED} (A)	R_{FB} (m Ω)	R_T (k Ω)
0.5	400(1%)	200 (1%)
1	200(1%)	150 (1%)
1.5	133(1%)	100 (1%)

NOTICE: The information in this document is subject to change without notice. Users should warrant and guarantee that third party Intellectual Property rights are not infringed upon when integrating MPS products into any application. MPS will not assume any legal responsibility for any said applications.