

### DESCRIPTION

The EVQ8612-L-12-00A is an evaluation board for the MPQ8612GL-12, a high efficiency monolithic synchronous step-down converter.

The Evaluation Board can deliver 12A continuous load current from a 3V to 6V input with excellent load and line regulation.

Constant-On-Time (COT) control mode provides fast transient response and eases loop stabilization.

The Evaluation Board can be turned on or shut down via a remote ON/OFF input that is reference to ground. This input is compatible with popular logic devices.

### ELECTRICAL SPECIFICATION

Parameter	Symbol	Value	Units
Input Volge	$V_{IN}$	3 – 6	V
Output Voltage	$V_{OUT}$	1.2	V
Output Current	$I_{OUT}$	12	A
Switching Frequency	$f_{SW}$	600	kHz

### FEATURES

- Wide 3V to 6V Operating Input Range
- 12A Output Current
- 10mΩ/7.8mΩ Internal Power MOSFETs
- Proprietary Switching Loss Reduction Technique
- Adaptive COT for Ultrafast Transient Response
- 1% Reference Voltage Over -40 to +150 Junction Temperature Range
- Programmable Soft Start Time
- Pre-Bias Start up
- Programmable Switching Frequency from 300kHz to 1MHz.
- Non-Latch OCP, Non-Latch OVP Protection and Thermal Shutdown
- Available in a QFN3x4 package

### APPLICATIONS

- Telecom System Base Station
- Networking System
- Server
- Personal Video Recorders
- Flat Panel Television and Monitors
- Distributed Power Systems

All MPS parts are lead-free, halogen free, and adhere to the RoHS directive. For MPS green status, please visit MPS website under Quality Assurance.


"MPS" and "The Future of Analog IC Technology" are Registered Trademarks of Monolithic Power Systems, Inc.

## EVQ8612-L-12-00A EVALUATION BOARD




(L x W x H) 8.55cm x 8.55cm x 1.6cm

Board Number	MPS IC Number
EVQ8612-L-12-00A	MPQ8612GL-12

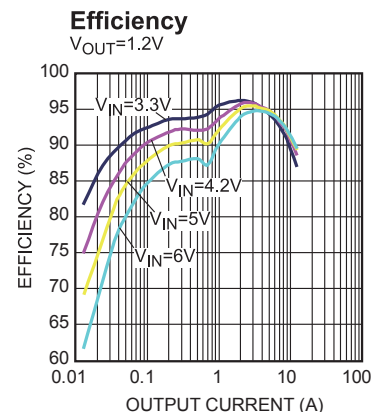

# EVALUATION BOARD SCHEMATIC

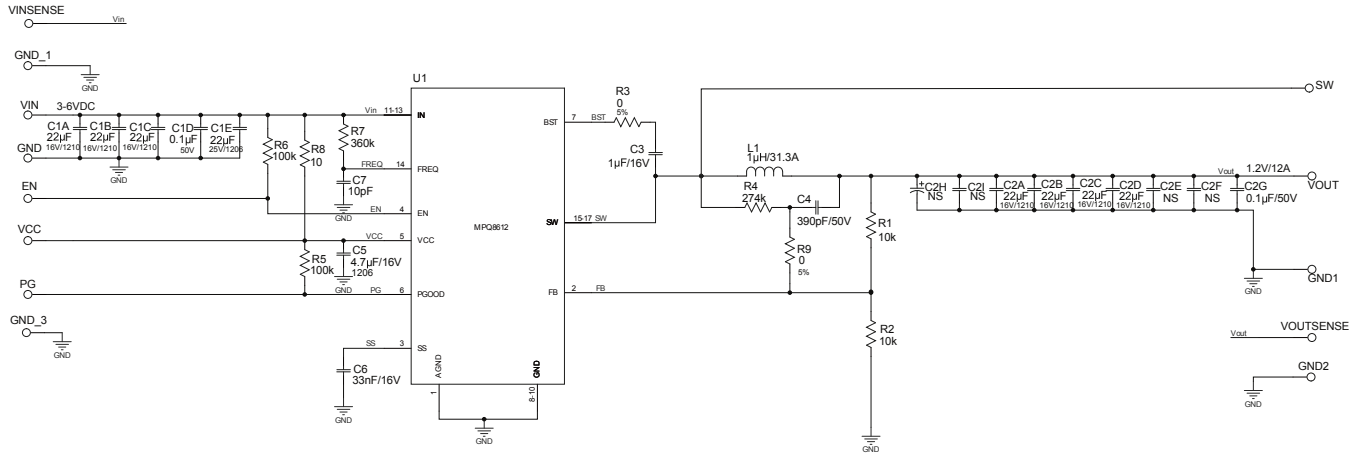

**EVQ8612-L-12-00A BILL OF MATERIALS**


Qty	Ref	Value	Description	Package	Manufacture	Part Number
7	C1A, C1B, C1C, C2A, C2B, C2C, C2D	22 $\mu$ F	Ceramic Capacitor; 16V;X7R;	1210	Murata	GRM32ER71C226KE18L
2	C1D, C2G	0.1 $\mu$ F	Ceramic Capacitor; 50V;X7R;0603;	0603	Murata	GRM188R71H104KA93D
1	C1E	22 $\mu$ F	Ceramic Capacitor; 25V;X5R	1206	Murata	GRM31CR61E226KE15
4	C2E, C2F, C2H,C2I	NS	Ceramic Capacitor; 16V;X7R;	1210	Murata	GRM32ER71C226KE18L
1	C3	1 $\mu$ F	Ceramic Capacitor; 16V;X7R;0603;	0603	Murata	GRM188R71C105KA12D
1	C4	390pF	Ceramic Capacitor; 50V;X7R;0603	0603	LION	0603B391K500T
1	C5	4.7 $\mu$ F	Ceramic Capacitor; 16V;X7R;1206	1206	Murata	GRM31CR71C475KA01
1	C6	33nF	Ceramic Capacitor; 16V;X7R;0603;	0603	Murata	GRM188R71C333KAO1D
1	C7	10pF	Ceramic Capacitor; 50V;COG;0603;	0603	Murata	GRM1885C1H100JA01
9	EN, GND2, GND_1, GND_3, PG, SW, VCC, VINSENSE, VOUTSENSE		Connector	CONN /1MM		
4	GND, GND1, VIN, VOUT		Connector	CONN /2MM		
1	L1	1 $\mu$ H	Inductor;1 $\mu$ H; 1.72mOhm;31.3A	SMD	TOKO	FDU1250C-1R0M
2	R1, R2	10k	Film Resistor;1%;	0603	Yageo	RC0603FR-0710KL
2	R3, R9	0	Film Resistor;5%;	0603	Yageo	RC0603JR-070RL
1	R4	274k	Film Resistor;1%	0603	Yageo	RC0603FR-07274KL
2	R5, R6	100k	Film Resistor;1%;	0603	Yageo	RC0603FR-07100KL
1	R7	360k	Film Resistor;1%	0603	Yageo	RC0603FR-07360KL
1	R8	10	Film Resistor;1%;	0603	Yageo	RC0603FR-0710RL
1	U1		Step Down Converter	QFN 3X4	MPS	MPQ8612GL-12

### EVB TEST RESULTS


Performance waveforms are tested on the EVQ8612-L-12-00A.

$V_{IN} = 5V$ ,  $V_{OUT} = 1.2V$ ,  $L = 1\mu H$ ,  $T_A = 25^\circ C$ , unless otherwise noted.


**Efficiency**

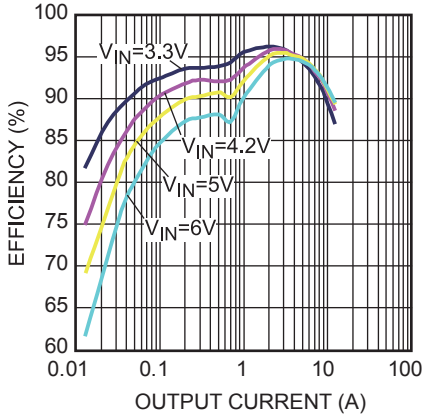


**Power Loss**

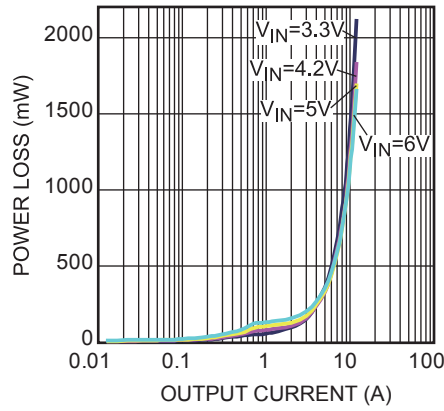

**Line Regulation**

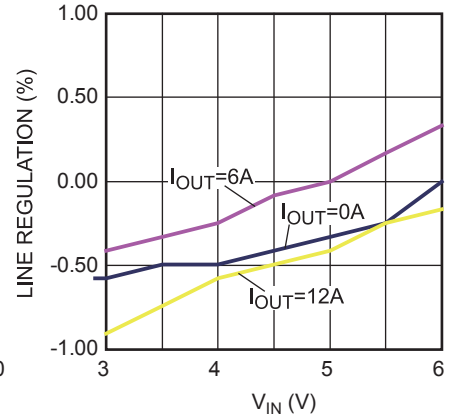

**Load Regulation**

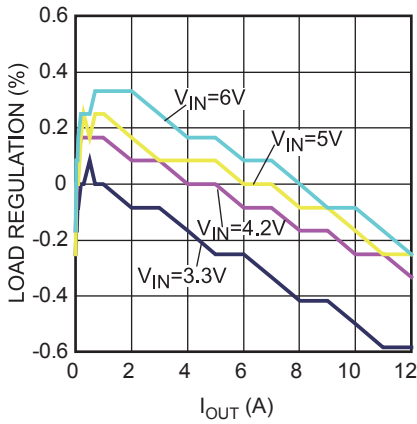


**EVB TEST RESULTS (continued)**


Performance waveforms are tested on the EVQ8612-L-12-00A.

$V_{IN} = 5.0V$ ,  $V_{OUT} = 1.2V$ ,  $L = 1.0\mu H$ ,  $T_A = 25^\circ C$ , unless otherwise noted.


**Input/Output Voltage Ripple**  
 $I_{OUT} = 0A$

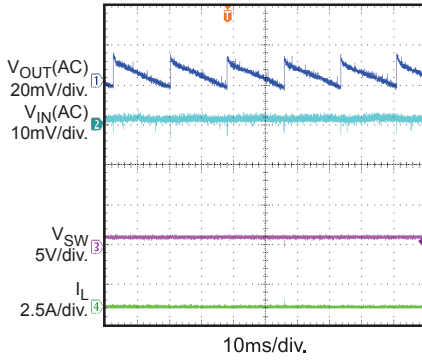


**Input/Output Voltage Ripple**  
 $I_{OUT} = 0.4A$

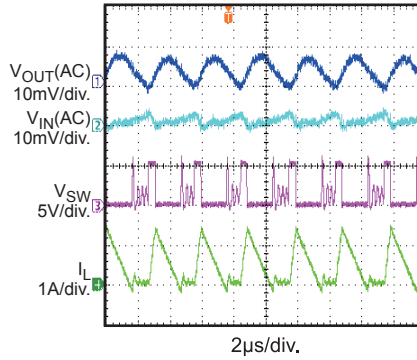


**Input/Output Voltage Ripple**  
 $I_{OUT} = 12A$

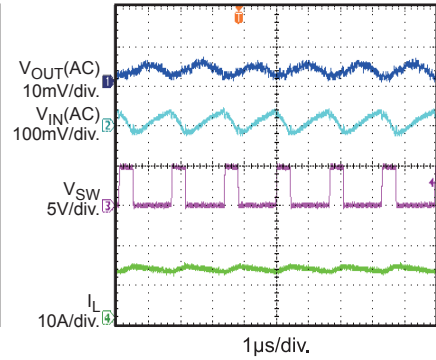


**Power Good through VIN Start-Up**  
 $I_{OUT} = 12A$

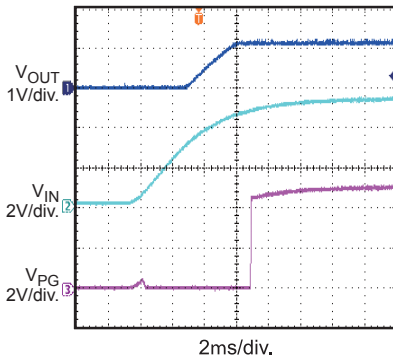


**Power Good through VIN Shutdown**  
 $I_{OUT} = 12A$

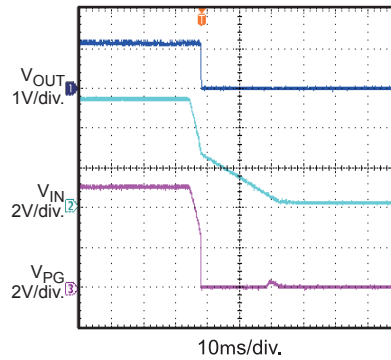


**Power Good through EN Start-Up**  
 $I_{OUT} = 12A$

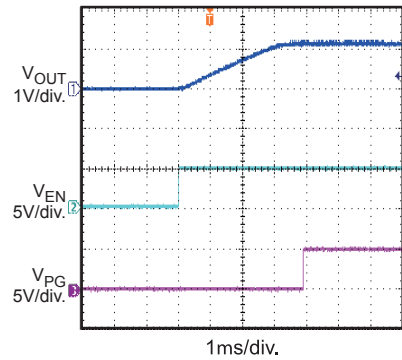


**Power Good through EN Shutdown**  
 $I_{OUT} = 12A$

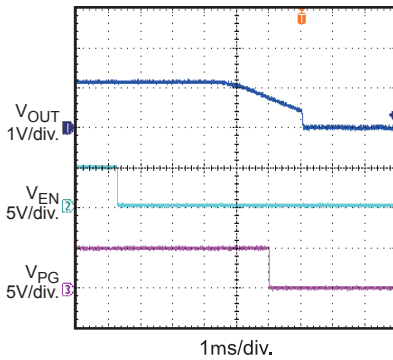

**Start-Up through VIN**  
 $I_{OUT} = 0A$

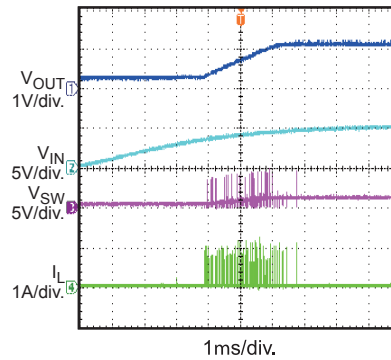

**Start-Up through VIN**  
 $I_{OUT} = 12A$

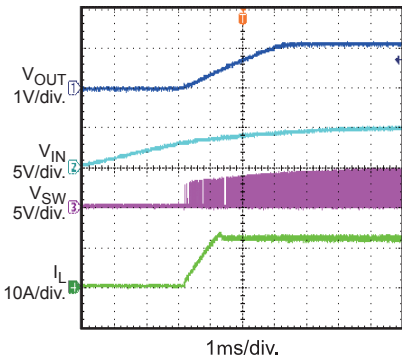


**EVB TEST RESULTS** *(continued)*


Performance waveforms are tested on the EVQ8612-L-12-00A.

$V_{IN} = 5.0V$ ,  $V_{OUT} = 1.2V$ ,  $L = 1.0\mu H$ ,  $T_A = 25^\circ C$ , unless otherwise noted.


**Shutdown through  $V_{IN}$**   
 $I_{OUT} = 0A$

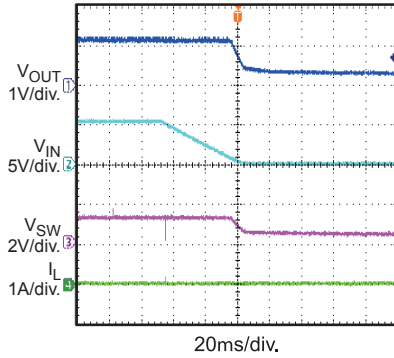


**Shutdown through  $V_{IN}$**   
 $I_{OUT} = 12A$

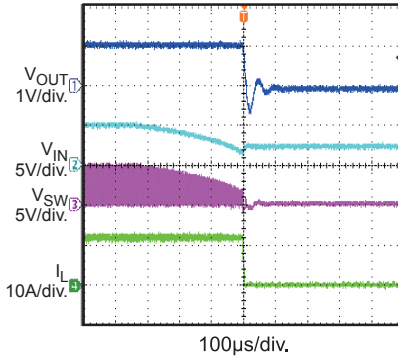


**Start-Up through EN**  
 $I_{OUT} = 0A$

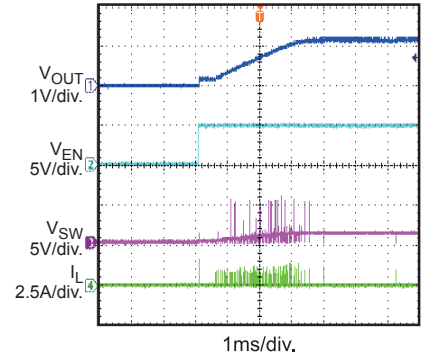


**Start-Up through EN**  
 $I_{OUT} = 12A$

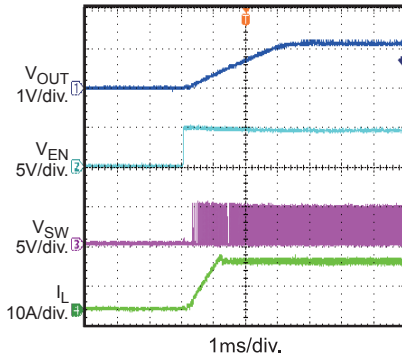

**Shutdown through EN**  
 $I_{OUT} = 0A$

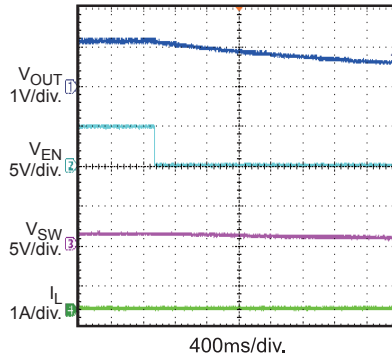


**Shutdown through EN**  
 $I_{OUT} = 12A$

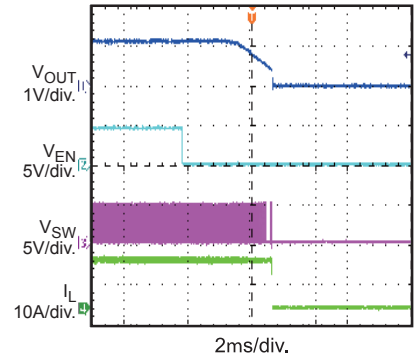


**Transient**

$I_{OUT} = 1.2A-10.8A@2.5A/\mu s$ ,  
 $f_{sw} = 600kHz$ ,  $C_{OUT} = 4 \times 22\mu F$

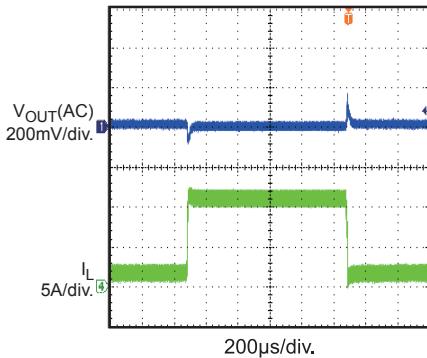


**Short Circuit Protection**

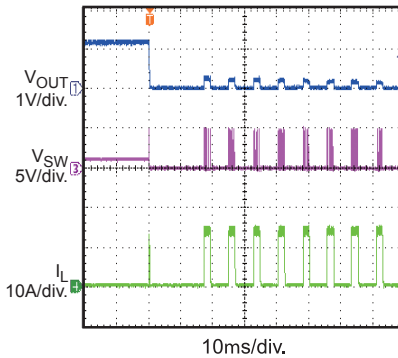

**Thermal Shutdown**

$I_{OUT} = 12A$

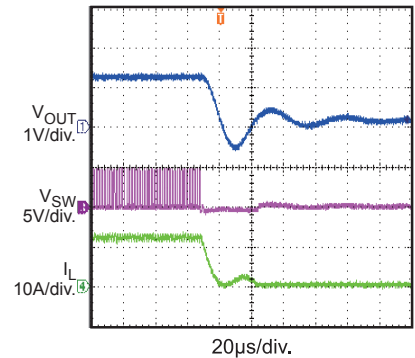


**EVB TEST RESULTS** *(continued)*

Performance waveforms are tested on the EVQ8612-L-12-00A.

$V_{IN} = 5.0V$ ,  $V_{OUT} = 1.2V$ ,  $L = 1.0\mu H$ ,  $T_A = 25^\circ C$ , unless otherwise noted.

**Thermal Recovery**

$I_{OUT} = 12A$

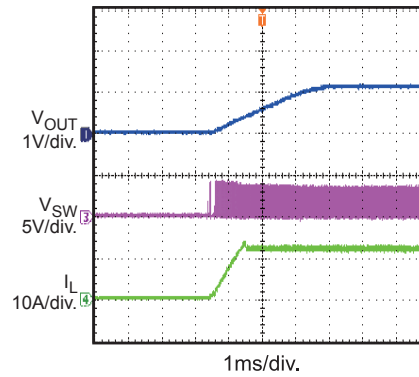

## PRINTED CIRCUIT BOARD LAYOUT

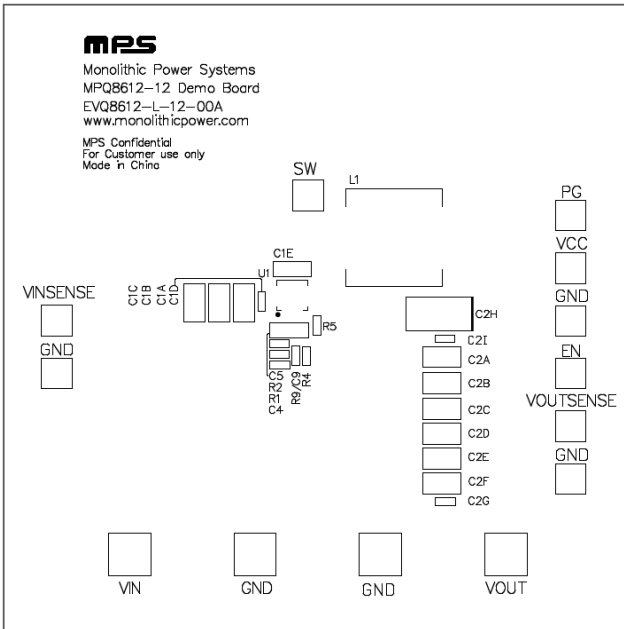


Figure 1: Top Silk Layer

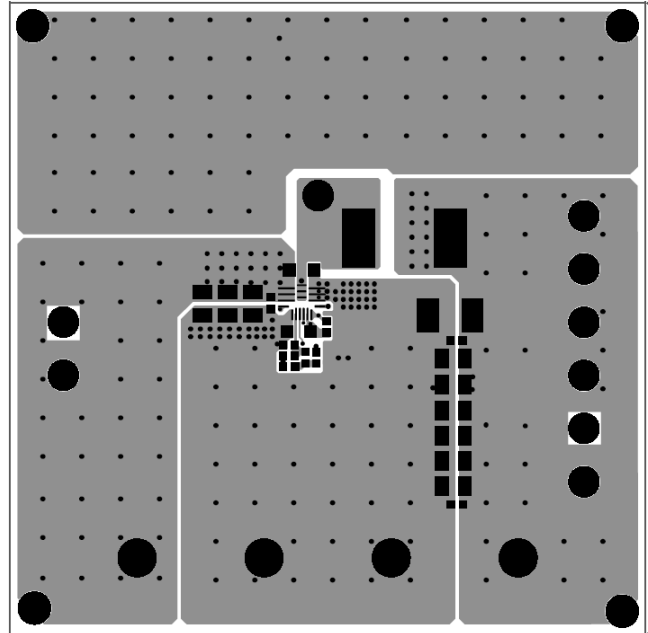


Figure 2: Top Layer

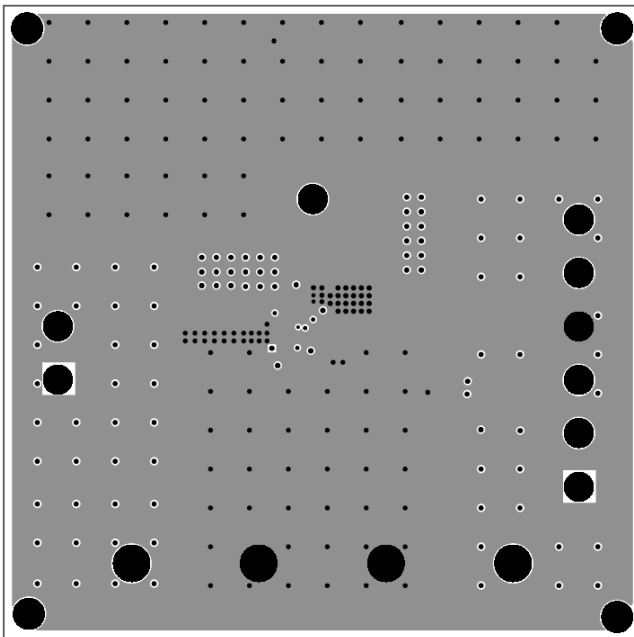


Figure 3: Inner Layer1

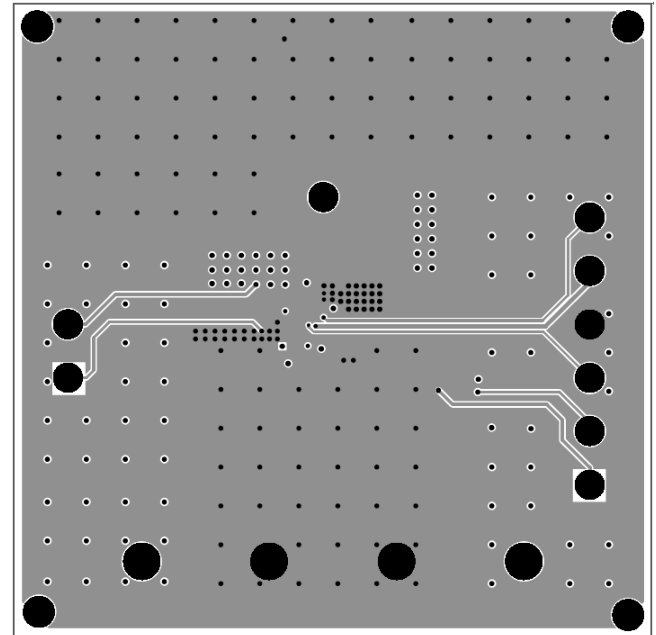


Figure 4: Inner Layer2



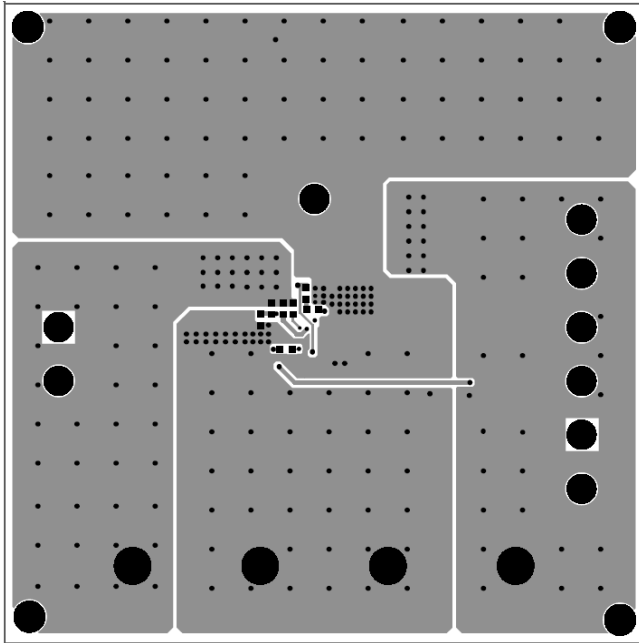


Figure 5: Bottom Layer

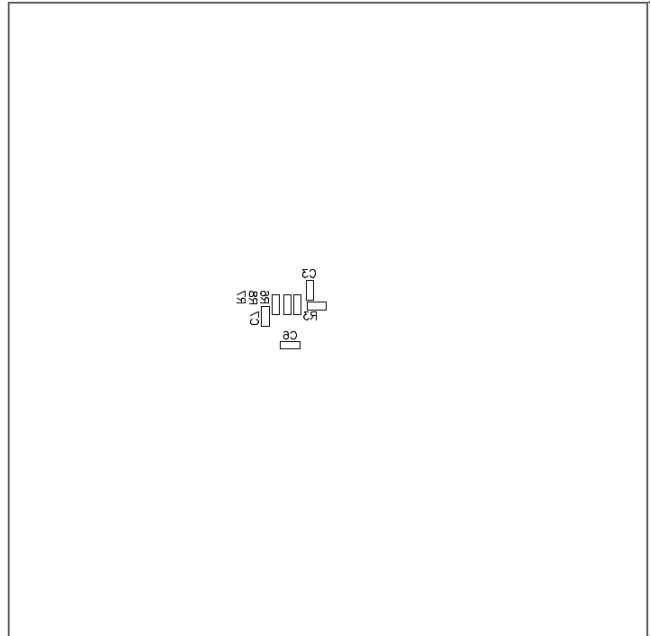


Figure 6: Bottom Silk Layer

## QUICK START GUIDE

1. Connect the positive and negative terminals of the load to the VOUT and GND pins respectively.
2. Preset the output of power supply between 3V and 6V, and then turn off the power supply.
3. Connect the positive and negative terminals of the power supply output to the VIN and GND pins respectively:
4. Turn the power supply on. The MPQ8612GL-12 will automatically start up.
5. To use the Enable function, apply a digital input to the EN pin. Drive EN higher than 2V to turn on the regulator or less than 0.4V to turn it off.
6. Use R1 and R2 to set the output voltage within  $V_{FB}=0.6V$ . Follow the Application information section in the device datasheet to select the proper value of R1, R2, inductor and output capacitor values when output voltage is changed.
7. If low ripple at light loads is needed, then use TOKO 1.2 $\mu$ H or 1.5 $\mu$ H L1. But with the larger L1, the transient response peak to peak value will become larger too.

**NOTICE:** The information in this document is subject to change without notice. Please contact MPS for current specifications. Users should warrant and guarantee that third party Intellectual Property rights are not infringed upon when integrating MPS products into any application. MPS will not assume any legal responsibility for any said applications.