EVCS1805-S-00A

Linear Hall-Effect Current Sensor with OCD, 3kV$_{RMS}$ Isolation, 580V$_{RMS}$ Working Voltage Evaluation Board

DESCRIPTION

The EVCS1805-S-00A is an evaluation board designed to demonstrate the capabilities of the MCS1805 series, which are linear Hall-effect current sensors for AC or DC current sensing with integrated over-current detection (OCD). The differential Hall array cancels out stray magnetic field. The MCS1805 series provides two power supply options (3.3V or 5V) and current ranges of 5A to 50A to optimize accuracy in different applications.

The output voltage (V_{OUT}) is proportional to the applied current flowing through the primary conductor. The galvanic isolation between the primary conductive path pins and the sensor leads allow the MCS1805 to replace optoisolators or other expensive isolation devices.

The MCS1805 is available in an SOIC-8 package.

PERFORMANCE SUMMARY

Specifications are at T_A = 25°C, unless otherwise noted.

Parameters	Conditions	Value
Supply voltage (V_{CC})		3.3V or 5V
Maximum primary applied current (I_{P_MAX})		±5A to ±50A
Output voltage (V_{OUT}) for bidirectional options		0.5 x V_{CC} + $Sens_{(TYP)}$ x I_P (1)
V_{OUT} for unidirectional options		0.1 x V_{CC} + $Sens_{(TYP)}$ x I_P (1)
Total accuracy	I_P from 10% x I_{P_MAX} to I_{P_MAX}	<2.5%
/OCD error		<10%

Note:

1) $Sens_{(TYP)}$ is the symbol for typical sensitivity.

EVCS1805-S-00A EVALUATION BOARD

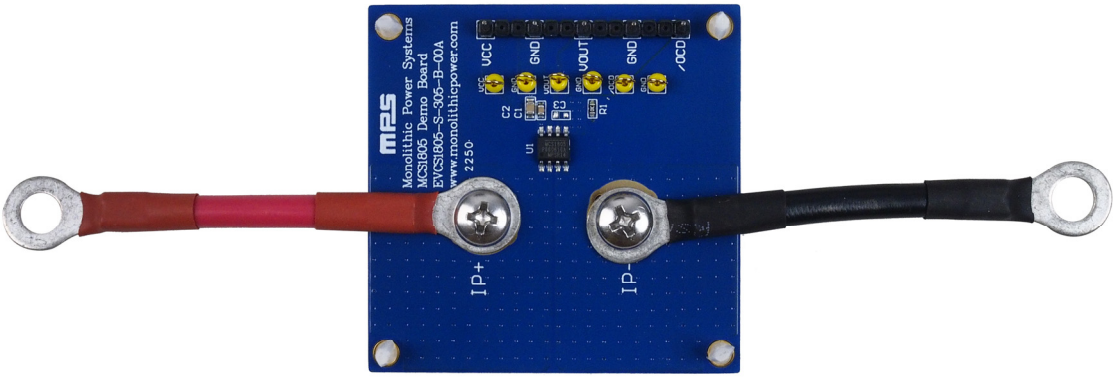

LxWxH (176mmx60mmx17mm)
2 Layers

Board Number	MPS IC Number
EVCS1805-S-ABB-CDDD-00A	MCS1805GS-ABB-CDDD

MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2024 MPS. All Rights Reserved.

EVALUATION BOARD BASIC INFORMATION (2)

Evaluation Board PN	Typical VCC Supply Voltage (V)	Rated Primary Current (A)	Typical Sensitivity (mV/A)	/OCD Trigger Point (A)
EVCS1805-S-305-B-00A	3.3	±5	264	±5
EVCS1805-S-320-B-00A	3.3	±20	66	±20
EVCS1805-S-330-B-00A	3.3	±30	44	±30
EVCS1805-S-340-B-00A	3.3	±40	33	±40
EVCS1805-S-350-B-00A	3.3	±50	26.4	±50
EVCS1805-S-510-B-00A	5	±10	200	±10
EVCS1805-S-520-B-00A	5	±20	100	±20
EVCS1805-S-540-B-00A	5	±40	50	±40

Note:

2) Contact an MPS FAE for additional variants.

MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2024 MPS. All Rights Reserved.

QUICK START GUIDE

1. Preset the DC power supply to 3.3V or 5V, then turn the power supply off.
2. Connect the DC power supply terminals to:
   a. Positive (+): VCC
   b. Negative (-): GND
3. Connect the current source load terminals to:
   a. Positive (+): IP+
   b. Negative (-): IP-
4. Turn on the DC power supply and current source, then measure the output result via the VOUT pin.
5. If over-current detection (OCD) is required, measure the /OCD signal via the /OCD pin.

MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2024 MPS. All Rights Reserved.

EVALUATION BOARD SCHEMATIC

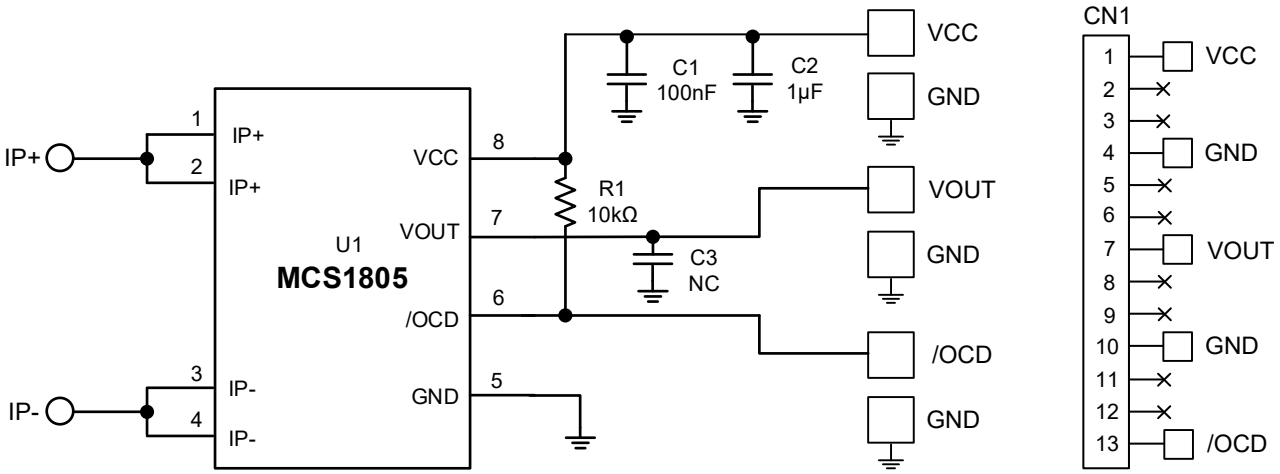

Figure 1: Evaluation Board Schematic

MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2024 MPS. All Rights Reserved.

EVCS1805-S-00A BILL OF MATERIALS

Qty	Ref	Value	Description	Package	Manufacturer	Manufacturer PN
1	C1	100nF	VCC ceramic decoupling capacitor, 16V, X7R	0603	Murata	GRM188R71C104KA01D
1	C2	1μF	VCC ceramic decoupling capacitor, 16V, X7R	0805	Murata	GRM21BR71C105KA01L
1	C3	NC				
1	R1	10kΩ	/OCD pull-up resistor	0603	Yageo	RC0603FR-0710KL
1	CN1	2.54mm	Male pin header, 13-pin	DIP	Custom	
1	U1	MCS1805	Linear Hall-effect current sensor with OCD	SOIC-8	MPS	MCS1805GS-ABB-CDDD

MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2024 MPS. All Rights Reserved.

EVB TEST RESULTS

Performance waveforms are tested on the EVCS1805-S-305-B-00A evaluation board (see the Evaluation Board Basic Information section on page 2) with an /OCD trigger point at 5A. V_{CC} = 3.3V, C3 is open, T_A = 25°C, unless otherwise noted.

DC Current Status

I_P = 5A

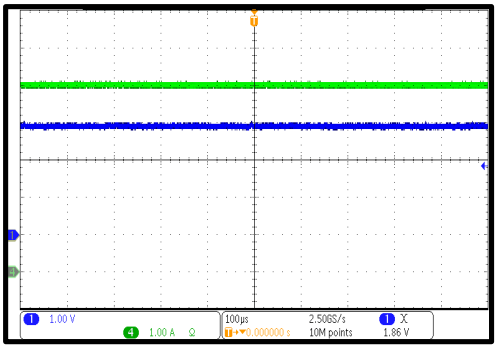

DC Current Status

I_P = -5A

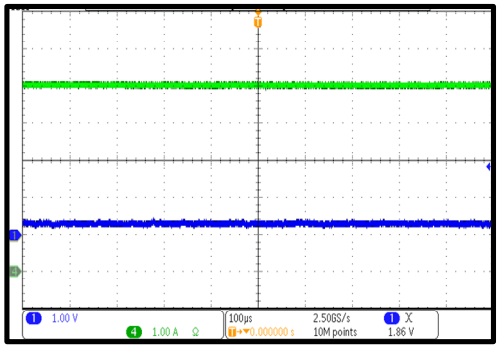

Start-Up through VCC

I_P = 5A

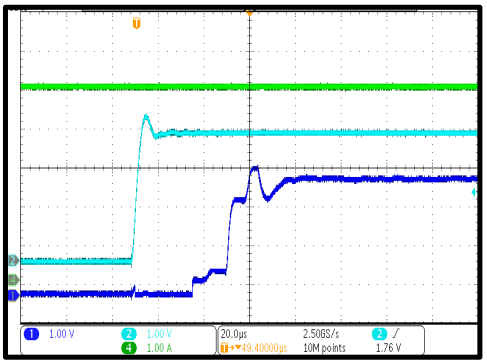

Shutdown through VCC

I_P = 5A

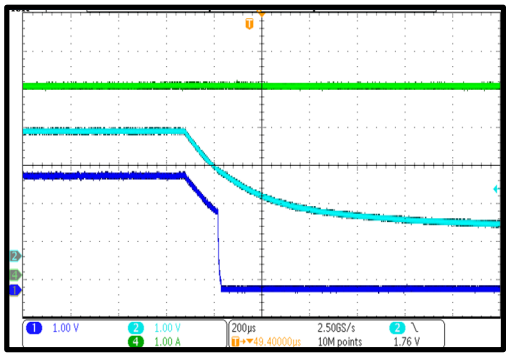

Step-Up Current

I_P = 5A

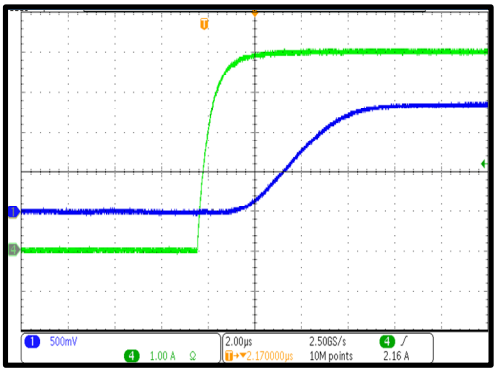

Step-Down Current

I_P = 5A

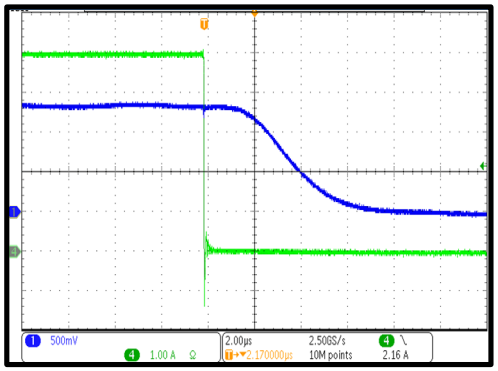

MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2024 MPS. All Rights Reserved.

EVB TEST RESULTS *(continued)*

Performance waveforms are tested on the EVCS1805-S-305-B-00A evaluation board (see the Evaluation Board Basic Information section on page 2) with an /OCD trigger point at 5A. V_{CC} = 3.3V, C3 is open, T_A = 25°C, unless otherwise noted.

/OCD Response

I_P = 20% above /OCD trigger point

CH2: /OCD
CH4: I_P

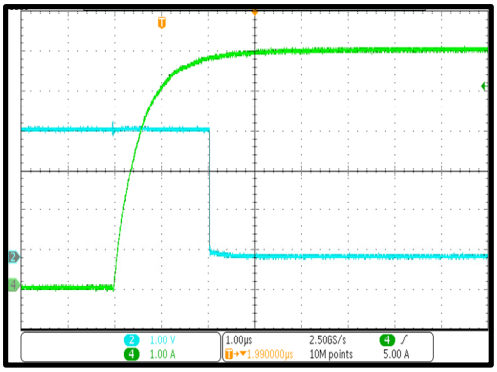

/OCD Recover

I_P = 20% above /OCD trigger point

CH2: /OCD
CH4: I_P

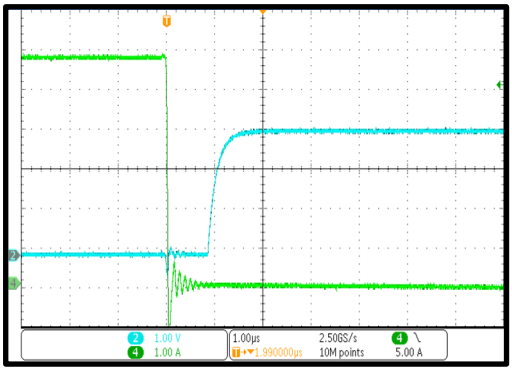

MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2024 MPS. All Rights Reserved.

PCB LAYOUT

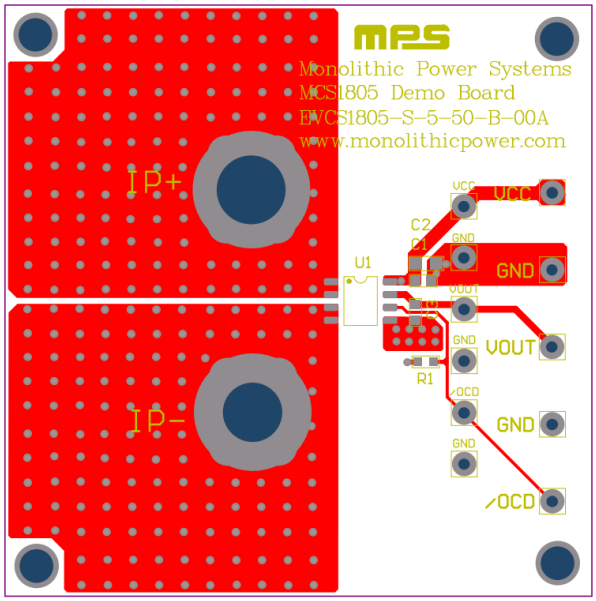

Figure 2: Top Silk and Top Layer

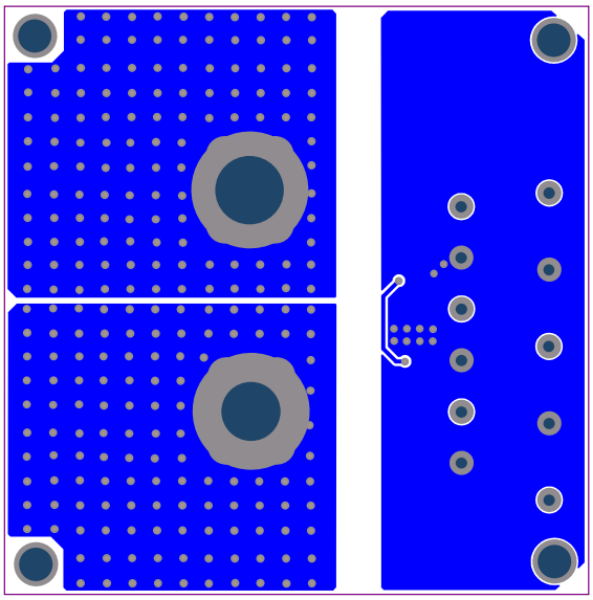

Figure 3: Bottom Layer

MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2024 MPS. All Rights Reserved.

REVISION HISTORY

Revision #	Revision Date	Description	Pages Updated
1.0	7/8/2024	Initial Release	-

Notice: The information in this document is subject to change without notice. Please contact MPS for current specifications. Users should warrant and guarantee that third-party Intellectual Property rights are not infringed upon when integrating MPS products into any application. MPS will not assume any legal responsibility for any said applications.

MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2024 MPS. All Rights Reserved.