



EV3432-L-00A

High-Efficiency, SYNC, BOOST Converter with Programmable Current Limit EV Board

DESCRIPTION

EV3432-L-00A Evaluation Board is designed to demonstrate the capability of MP3432. The MP3432 is a 600kHz fixed frequency, wide input range, highly integrated boost converter. It starts from an input voltage as low as 2.7V, and supports up to 30W load power from 1-cell battery.

MP3432 adopts constant-off-time (COT) control topology providing fast transient response. One MODE pin supports mode selection of PSM, FCCM and USM in light load condition. And the integrated low-side and high-side MOSFET simplify the design and save BOM cost.

The MP3432 features with programmable switching peak current limit provides accurate over load protection. And it also features with programmable input UVLO and over temperature protection.

The MP3432 is available in a 13-pin 3mmx4mm QFN package.

Electrical Specification

| Parameter | Symbol | Value | Units |
|-------------------------|-----------------------|-------|-------|
| Input Voltage | V _{IN} | 3-8.4 | V |
| Switching Current Limit | I _{sw_LIMIT} | 14 | A |
| Output Voltage | V _{OUT} | 9 | V |
| Output Current | I _{OUT} | 3.5 | A |

FEATURES

- 2.7V-to-13V Startup Voltage
- 0.8V-to-13V Operation Voltage
- Up to 16V Output Voltage
- Support 30W Average Power Load and 40W Peak Power Load from 3.3V
- Programmable Switching Peak Current Limit
- Integrated 6.5mΩ & 10mΩ Power MOSFET
- >95% Efficiency for 3.6V VIN to 9V/3A
- Selectable PSM, >23kHz USM, and FCCM Mode in Light Load Condition
- Auto Pass-Through Function in PSM Mode when VIN>VOUT
- 600kHz Fixed Switching Frequency
- Adaptive COT for Fast Transient Response
- External Soft Start and Compensation Pin
- Programmable UVLO and Hysteresis
- 150°C Over Temperature Protection
- Available in 3x4mm QFN-13 Package

APPLICATIONS

- Notebook
- Bluetooth Speaker
- Portable POS System
- Quick Charger Power Bank

All MPS parts are lead-free, halogen free, and adhere to the RoHS directive. For MPS green status, please visit MPS website under Quality Assurance. "MPS" and "The Future of Analog IC Technology" are Registered Trademarks of Monolithic Power Systems, Inc.


EV3432-L-00A EVALUATION BOARD




(L x W x H) 6.35cm x 6.35cm x 0.6cm

| Board Number | MPS IC Number |
|--------------|---------------|
| EV3432-L-00A | MP3432GL |

Efficiency vs. Load Current PSM

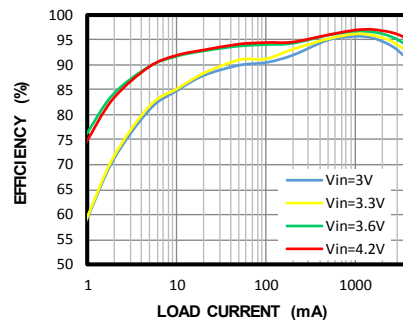

EVALUATION BOARD SCHEMATIC

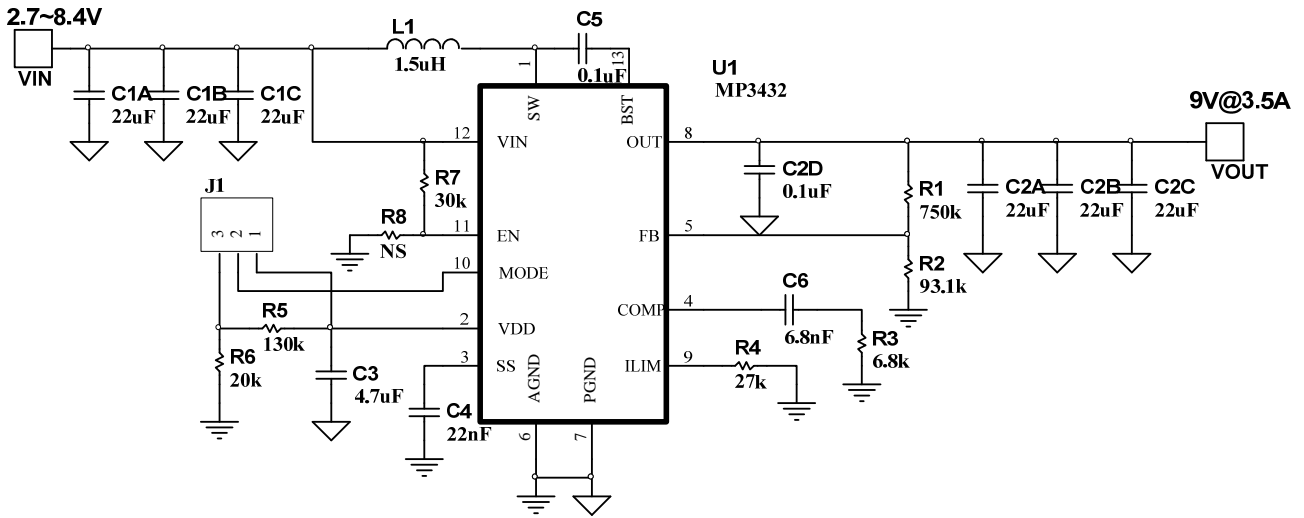


EV3432-L-00A BILL OF MATERIALS

| Qty | Ref | Value | Description | Package | Manufacturer | Part Number |
|-----|------------------------------------|-------------|---|--------------|--------------|---------------------|
| 6 | C1A, C1B, C1C, C2A, C2B, C2C | 22 μ F | Ceramic Cap,25V,X5R | 1210 | MuRata | GRM32ER61E226KE15L |
| 2 | C2D,C5 | 0.1 μ F | Ceramic Cap,25V,X7R | 0603 | MuRata | GRM188R71E104KA01D |
| 1 | C3 | 4.7 μ F | Ceramic Cap,6.3V,X5R | 0603 | MuRata | GRM188R71J475KA01D |
| 1 | C4 | 22nF | Ceramic Cap,16V,X7R | 0603 | MuRata | GRM188R71C223KA01D |
| 1 | C6 | 6.8nF | Ceramic Cap,50V,X7R | 0603 | MuRata | GRM188R71H682KA01D |
| 1 | R1 | 750k | Film Res,1% | 0603 | ROYAL | RL0603FR-07750KL |
| 1 | R2 | 93.1k | Film Res,1% | 0603 | ROYAL | RL0603FR-0793K1L |
| 1 | R3 | 6.8k | Film Res,1% | 0603 | ROYAL | RL0603FR-076K8L |
| 1 | R4 | 27k | Film Res,1% | 0603 | ROYAL | RL0603FR-0727KL |
| 1 | R5 | 130k | Film Res,1% | 0603 | ROYAL | RL0603FR-07130KL |
| 1 | R6 | 20k | Film Res,1% | 0603 | ROYAL | RL0603FR-0720KL |
| 1 | R7 | 30k | Film Res,1% | 0603 | ROYAL | RL0603FR-0730KL |
| 0 | R8 | NC | | | | |
| 1 | L1 | 1.5 μ H | I _{RMS} =19A, R _{DC} =3.3m Ω | 11.5x10mm | Sumida | 104CDMCCDS-1R5MC-ND |
| 1 | J1 | Jumper | Short Jumper, 2.54mm | | | Jumper |
| 1 | U1 | MP3432 | Boost converter | QFN 3X4mm | MPS | MP3432GL |


EVB TEST RESULTS

$V_{IN} = 3.3V$, $V_{OUT} = 9V$, $L = 1.5\mu H$, $R_{LIM} = 27k\Omega$, $I_{OUT} = 3.5A$, PSM, $T_A = 25^\circ C$, unless otherwise noted.


Efficiency vs. Load Current
PSM

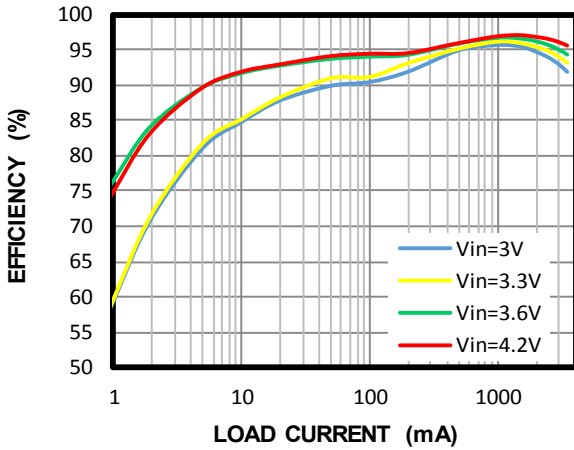


Efficiency vs. Load Current
USM

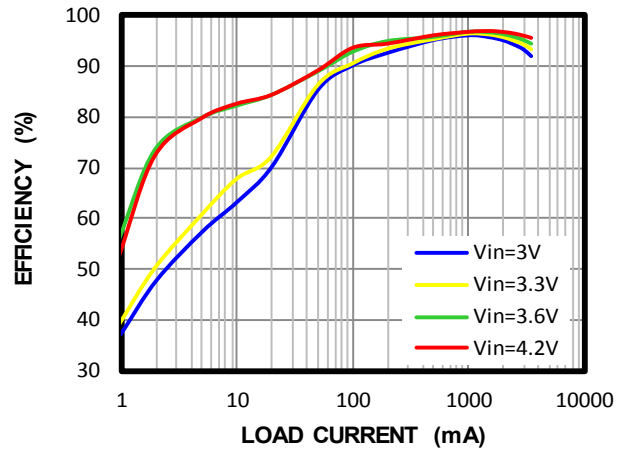


Load Regulation
PSM

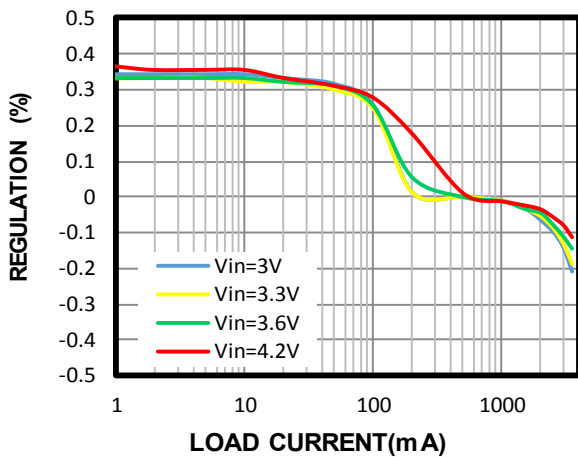


Load Regulation
USM

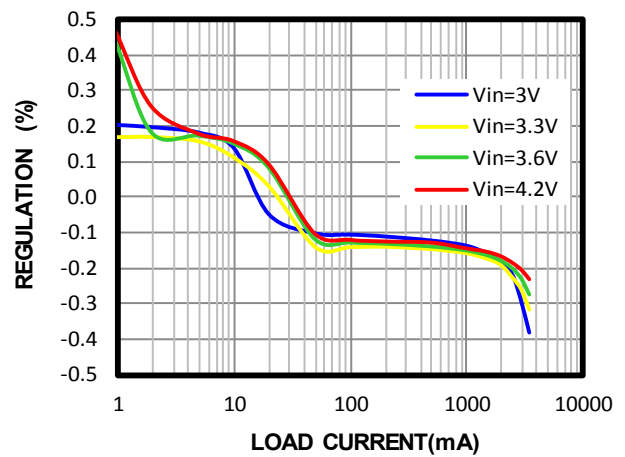

Line Regulation
PSM

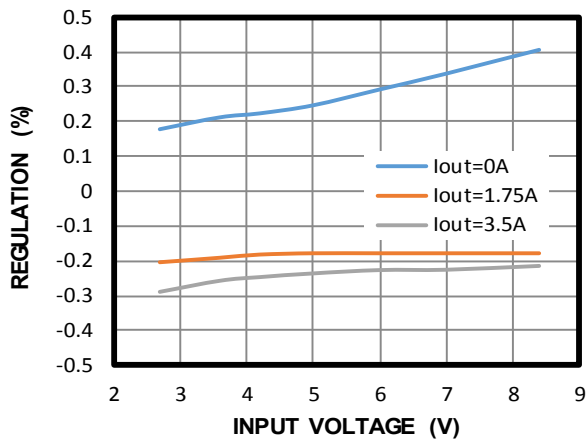


Line Regulation
USM

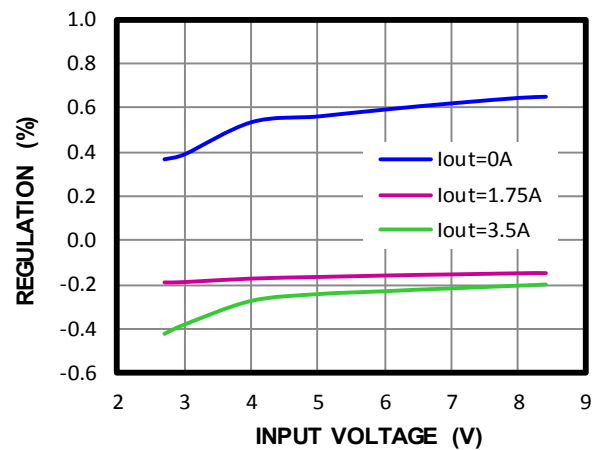


EVB TEST RESULTS *(continued)*

$V_{IN} = 3.3V$, $V_{OUT} = 9V$, $L = 1.5\mu H$, $R_{LIM} = 27k\Omega$, $I_{OUT} = 3.5A$, PSM, $T_A = 25^\circ C$, unless otherwise noted.

Body Plot
 $I_{OUT} = 3.5A$

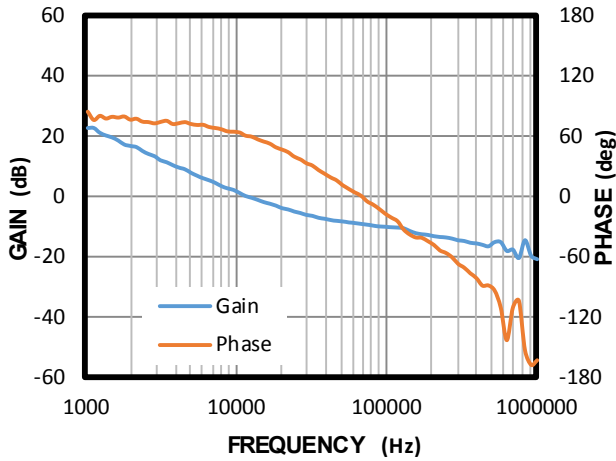

Case Temperature Rising

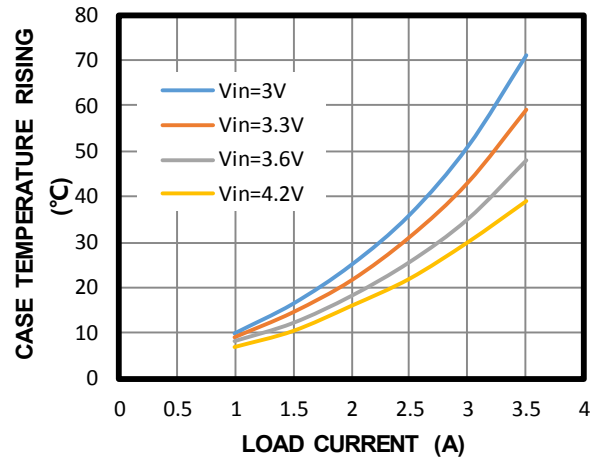


EVB TEST RESULTS (continued)

$V_{IN} = 3.3V$, $V_{OUT} = 9V$, $L = 1.5\mu H$, $R_{LIM} = 27k\Omega$, $I_{OUT} = 3.5A$, PSM, $T_A = 25^\circ C$, unless otherwise noted.


Steady State

$I_{OUT} = 0A$, USM

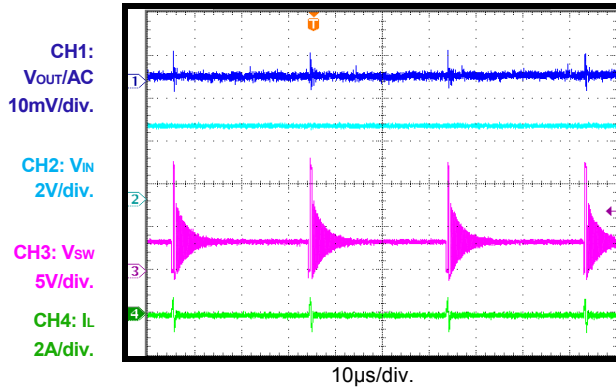


Steady State

$I_{OUT} = 0A$, PSM

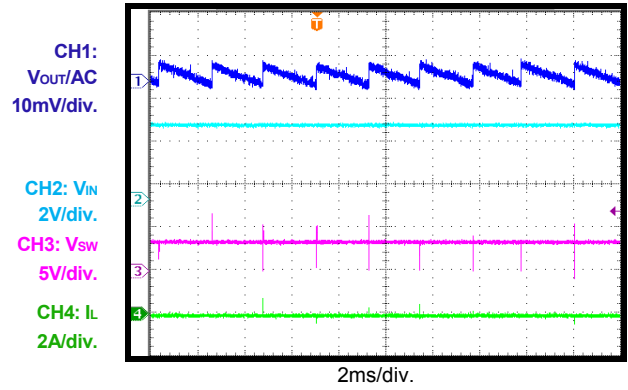


Steady State

$I_{OUT} = 0A$, FCCM

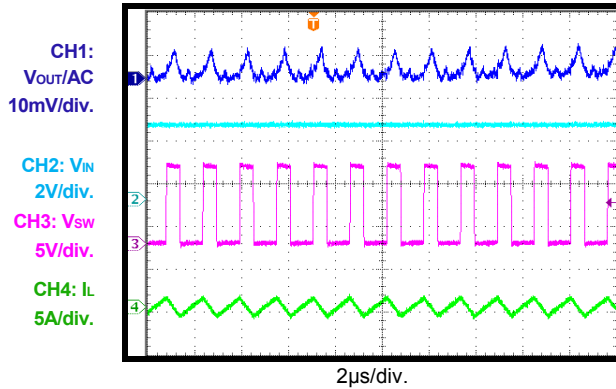


Steady State

$I_{OUT} = 3.5A$

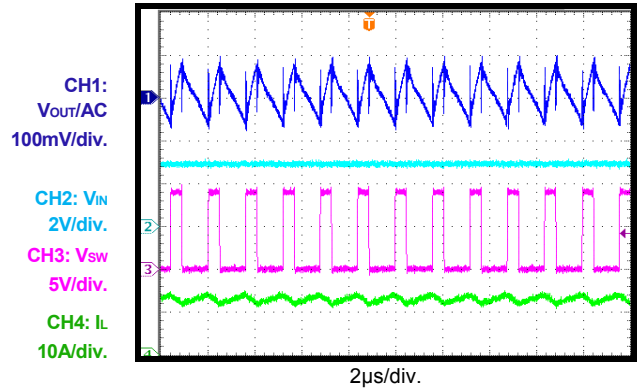


VIN Start-Up

$I_{OUT} = 0A$

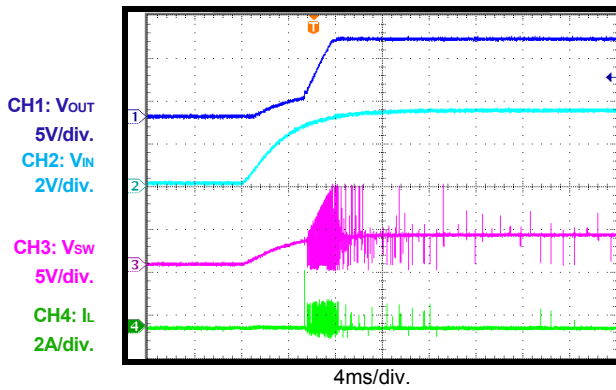

VIN Start-Up


$I_{OUT} = 3.5A$

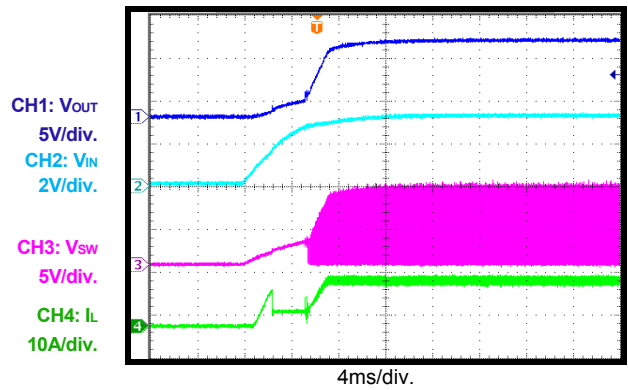


EVB TEST RESULTS (continued)

$V_{IN} = 3.3V$, $V_{OUT} = 9V$, $L = 1.5\mu H$, $R_{LIM} = 27k\Omega$, $I_{OUT} = 3.5A$, PSM, $T_A = 25^\circ C$, unless otherwise noted.


V_{IN} Shutdown
 $I_{OUT} = 0A$

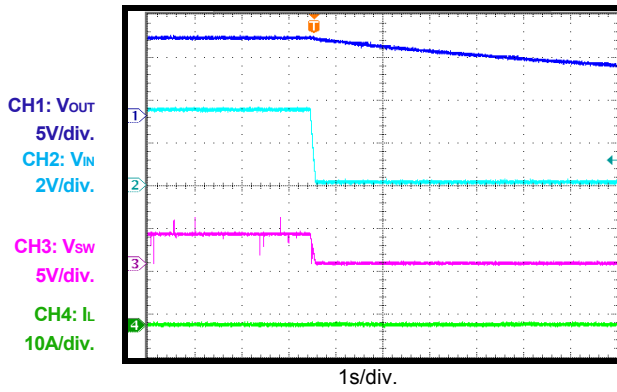


V_{IN} Shutdown
 $I_{OUT} = 3.5A$

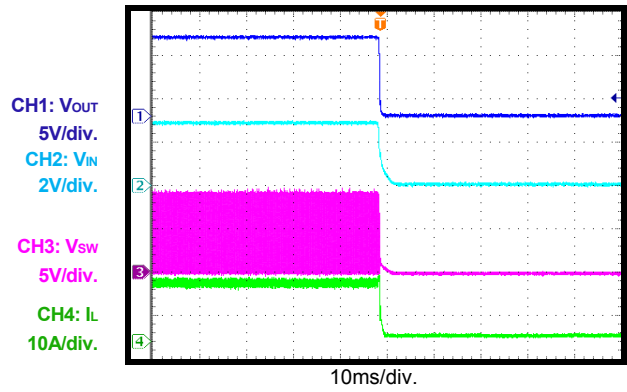


EN Start-Up
 $I_{OUT} = 0A$

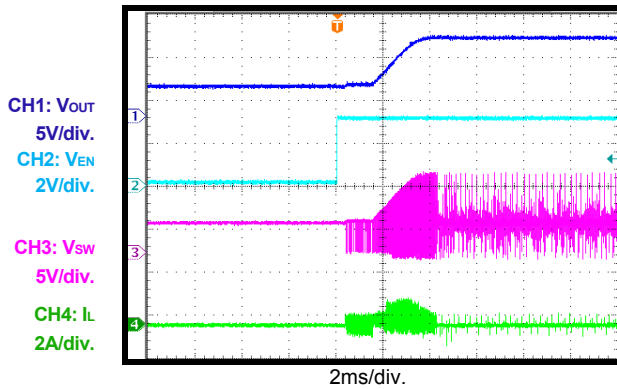


EN Start-Up
 $I_{OUT} = 3.5A$

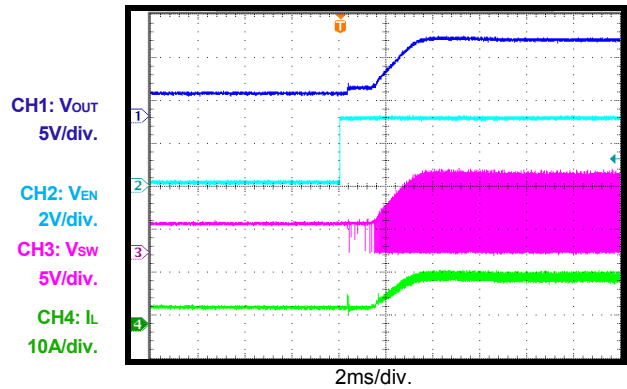

EN Shutdown
 $I_{OUT} = 0A$

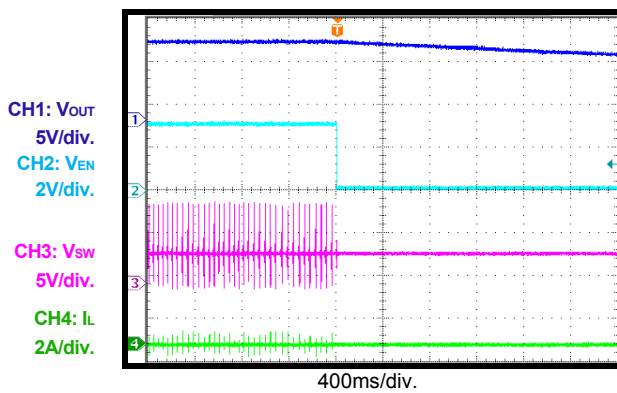

EN Shutdown
 $I_{OUT} = 3.5A$

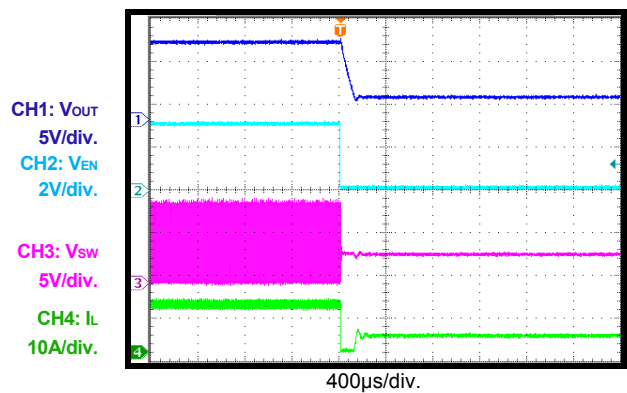


EVB TEST RESULTS (continued)

$V_{IN} = 3.3V$, $V_{OUT} = 9V$, $L = 1.5\mu H$, $R_{LIM} = 27k\Omega$, $I_{OUT} = 3.5A$, PSM, $T_A = 25^\circ C$, unless otherwise noted.


Load Transient

$I_{OUT} = 0-1.75A$, $I_{RAMP} = 25mA/\mu s$, USM

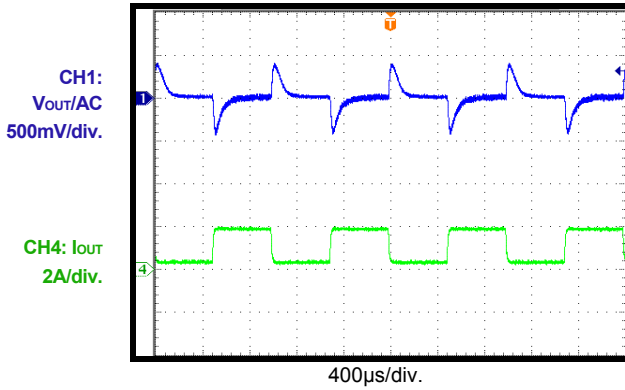


Load Transient

$I_{OUT} = 3.5-1.75A$, $I_{RAMP} = 25mA/\mu s$

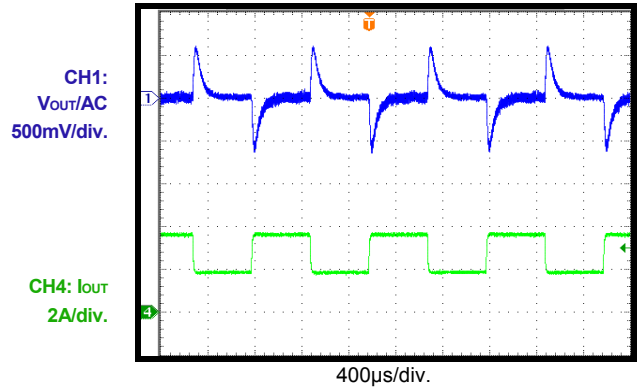


Load Transient

$I_{OUT} = 0-1.75A$, $I_{RAMP} = 25mA/\mu s$, PSM

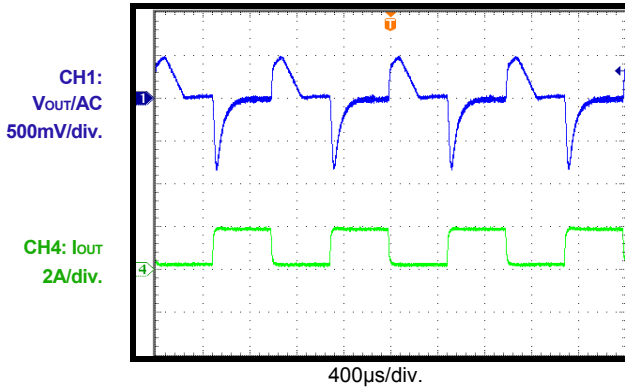


Load Transient

$I_{OUT} = 0-1.75A$, $I_{RAMP} = 25mA/\mu s$, FCCM

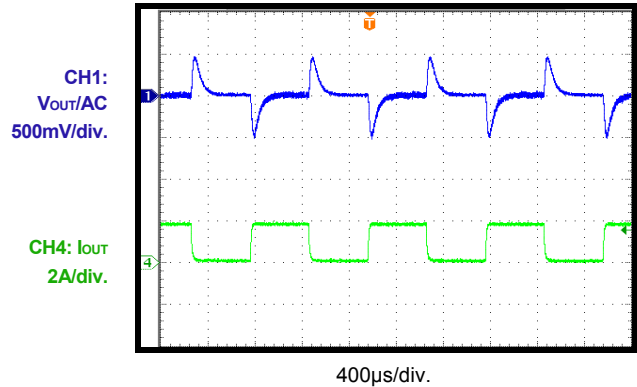


Over-Current Entry

Increase Output Current Slow, 0A->6A

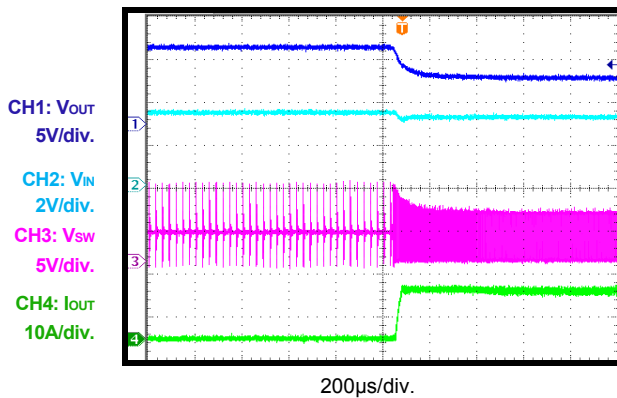

Over-Current Recovery

Decrease Output Current Slow, 6A->0A

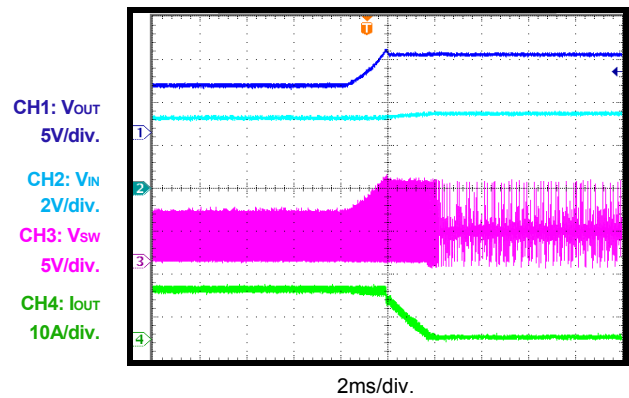

PRINTED CIRCUIT BOARD LAYOUT

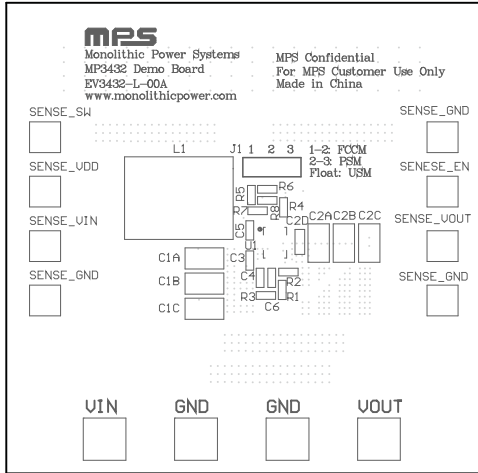


Figure 1—Top Silk Layer

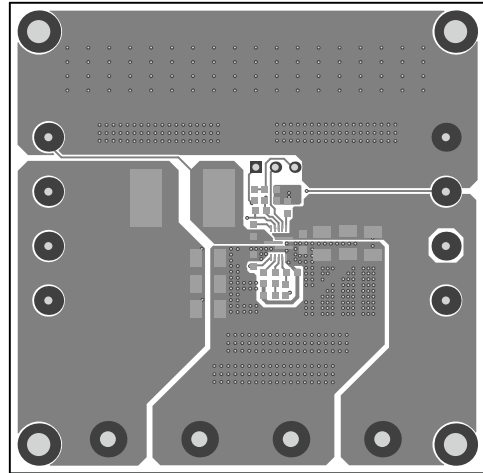


Figure 2—Top Layer

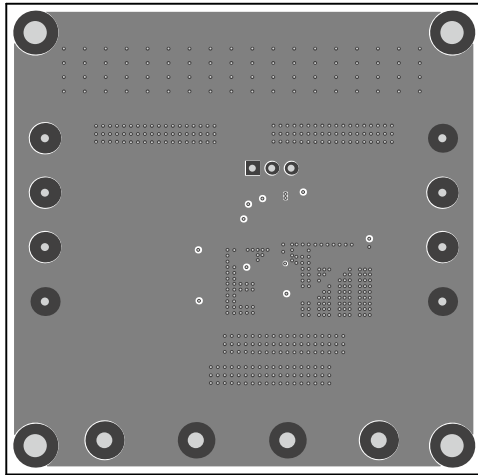


Figure 3—Inner Layer 1

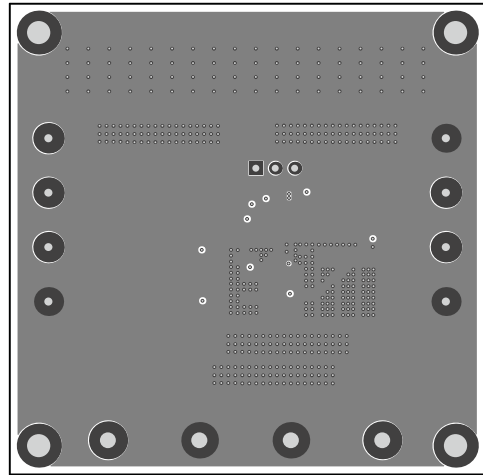


Figure 4—Inner Layer 2

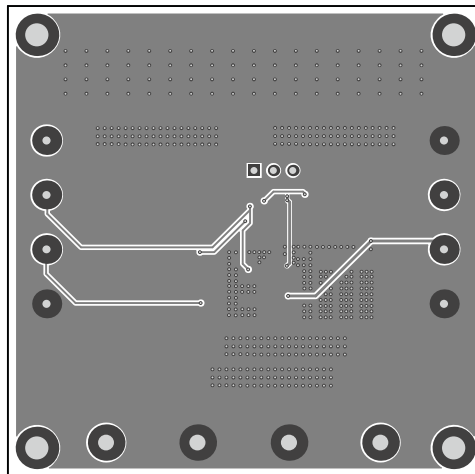


Figure 5—Bottom Layer

QUICK START GUIDE

The output voltage of this board is set to 9V. The board layout accommodates most commonly used components. Following below steps to quick start EV3432-L-00A.

1. Preset Power Supply to $3V \leq V_{IN} \leq 8.4V$.
2. Turn Power Supply off.
3. Connect Power Supply terminals to:
 - a. Positive (+): VIN
 - b. Negative (-): GND
4. Connect Load to:
 - a. Positive (+): VOUT
 - b. Negative (-): GND
5. Turn Power Supply on after making connections.
6. The MP3432 is enabled on the evaluation board once VIN is applied.
7. The output voltage VOUT can be changed by varying R2. Calculate the new value using the formula:

$$V_{OUT} = V_{FB} \times \left(1 + \frac{R1}{R2}\right)$$

Where $V_{FB} = 1V$ and $R1 = 750k\Omega$.

8. If USM and FCCM is needed, following below steps:
 - a. Turn Power Supply off.
 - b. Change J1 connection. Connect 1 to 2 for FCCM, connect 2 to 3 for PSM, and float 2 for USM.
 - c. Turn the power on. IC will work with the mode which is set by step b.
9. If the auto pass-through function is needed, following below steps:
 - a. Set J1 to make MP3432 working in PSM.
 - b. Increasing input voltage much higher than $V_{OUT-SET}$, MP3432 will enter auto pass-through automatically.

NOTICE: The information in this document is subject to change without notice. Please contact MPS for current specifications. Users should warrant and guarantee that third party Intellectual Property rights are not infringed upon when integrating MPS products into any application. MPS will not assume any legal responsibility for any said applications.