



EV2348-TL-00A

High-Efficiency, 650kHz, 4A, 24V, Step-Down Converter Evaluation Board

DESCRIPTION

The EV2348-TL-00A evaluation board is designed to demonstrate the capabilities of the MP2348, a fully integrated, high-frequency, synchronous, rectified, step-down switch-mode converter with internal power MOSFETs. It offers a very compact solution to achieve 4A of continuous output current across a wide input supply range, with excellent load and line regulation. The MP2348 has synchronous mode operation for higher efficiency across the output current load range.

Constant-on-time (COT) control provides very fast transient response, easy loop design, and very tight output regulation.

Full protection features include short-circuit protection (SCP), over-current protection (OCP), under-voltage protection (UVP), and thermal shutdown.

The MP2348 requires a minimal number of readily available, standard external components, and is available in a space-saving SOT583 (1.6mmx2.1mm) package.

ELECTRICAL SPECIFICATIONS ⁽¹⁾

Parameter	Symbol	Value	Units
Input voltage	V_{IN}	19	V
Output voltage	V_{OUT}	3.3	V
Output current	I_{OUT}	4	A

Note:

- 1) For different input/output voltage specifications or different output capacitors and inductors, the application circuit parameters may require changes.

FEATURES

- Wide 4.2V to 24V Operating Input Range
- 75mΩ/40mΩ Low $R_{DS(ON)}$ Internal Power MOSFETs
- 200μA Low I_Q
- High-Efficiency Synchronous Mode Operation
- Forced PWM, Auto-PFM/PWM and Selectable Ultrasonic Mode
- Fast Load Transient Response
- 650kHz Switching Frequency
- Programmable Soft-Start Time
- Over-Current Protection (OCP) and Hiccup Mode
- Pre-Biased Start-Up
- Thermal Shutdown
- Available in a SOT583 (1.6mmx2.1mm) Package

APPLICATIONS

- Game Consoles
- Digital Set-Top Boxes
- Flat-Panel Television and Monitors
- General Purposes

All MPS parts are lead-free, halogen-free, and adhere to the RoHS directive. For MPS green status, please visit the MPS website under Quality Assurance. "MPS", the MPS logo, and "Simple, Easy Solutions" are trademarks of Monolithic Power Systems, Inc. or its subsidiaries.

EV2348-TL-00A EVALUATION BOARD




(LxWxH) 63.7mmx48.4mmx6.4mm

Board Number	MPS IC Number
EV2348-TL-00A	MP2348GTL

Efficiency

PFM without USM, $V_{OUT} = 3.3V$,
 $L = 3.3\mu H$, $DCR = 9m\Omega$

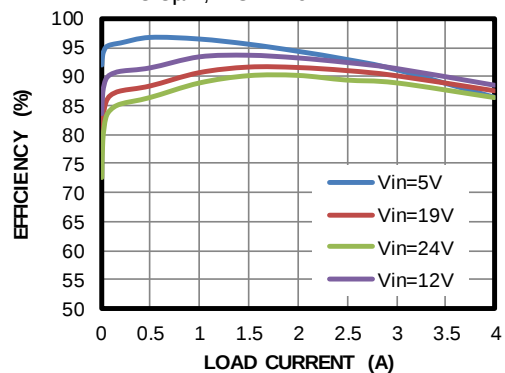

QUICK START GUIDE

1. Preset the power supply to 19V.
2. Turn the power supply off.
3. Connect the power supply terminals to:
 - a. Positive (+): VIN
 - b. Negative (-): GND
4. Connect the load terminals to:
 - a. Positive (+): VOUT
 - b. Negative (-): GND
5. Turn the power supply on after making the connections. The board should automatically start up.
6. To use the enable function, apply a digital input to the EN pin. Drive EN above 1.3V to turn the regulator on; drive EN below 1V to turn the regulator off.

EVALUATION BOARD SCHEMATIC

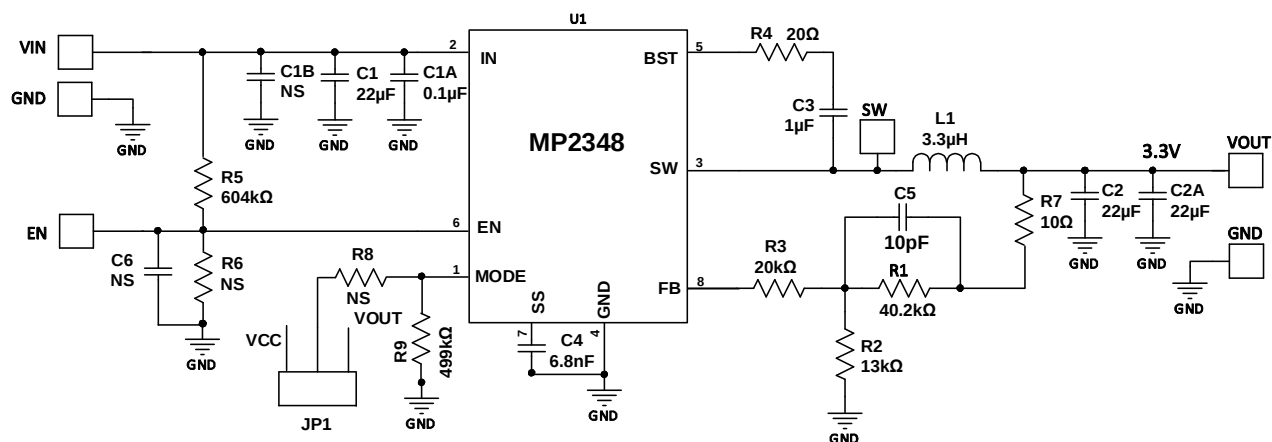


Figure 1: Evaluation Board Schematic

EV2348-TL-00A BILL OF MATERIALS

Qty	Ref	Value	Description	Package	Manufacturer	Manufacturer P/N
1	C1	22 μ F	25V ceramic capacitor, X5R	0805	Murata	GRM21BR61E226ME44L
1	C1A	0.1 μ F	25V ceramic capacitor, X7R	0603	Murata	GRM188R71E104KA01D
2	C2, C2A	22 μ F	16V ceramic capacitor, X5R	0805	Murata	GRM21BR61C226ME44L
1	C3	1 μ F	16V ceramic capacitor, X7R	0603	Murata	GRM188R71C105KA12D
1	C4	6.8nF	50V ceramic capacitor, X7R	0603	Murata	GRM188R71H682KA01D
1	C5	10pF	50V ceramic capacitor, COG	0603	Murata	GRM1885C1H100JA01D
0	C1B, C6	NS				
1	R1	40.2k Ω	Thick film resistor, 1%	0603	Yageo	RC0603FR-0740K2L
1	R2	13k Ω	Thick film resistor, 1%	0603	Yageo	RC0603FR-0713KL
1	R3	20k Ω	Thick film resistor, 1%	0603	Yageo	RC0603FR-0720KL
1	R4	20 Ω	Thick film resistor, 1%	0603	Yageo	RC0603FR-0720RL
1	R5	604k Ω	Thick film resistor, 1%	0603	Yageo	RC0603FR-07604KL
0	R6	NS				
1	R7	10 Ω	Thick film resistor, 1%	0603	Yageo	RC0603JR-0710RL
1	R8	NS				
1	R9	499k Ω	Thick film resistor, 1%	0603	Yageo	RC0603FR-07499KL
1	L1	3.3 μ H	Inductor, DCR = 9m Ω , I _{SAT} = 9A	SMD	Wurth	744314330
1	U1	MP2348	Synchronous step-down converter	SOT583	MPS	MP2348GTL
1	JP1		Jumper	SIP-3	Any	

EVB TEST RESULTS

$V_{IN} = 19V$, $V_{OUT} = 3.3V$, $L = 3.3\mu H$, $T_A = 25^{\circ}C$, unless otherwise noted.

Input/Output Ripple


$I_{OUT} = 0A$, PFM

CH1:
 V_{OUT}/AC
20mV/div.

CH2: V_{IN}
10V/div.

CH1: V_{SW}
10V/div.

CH4: I_L
2A/div.

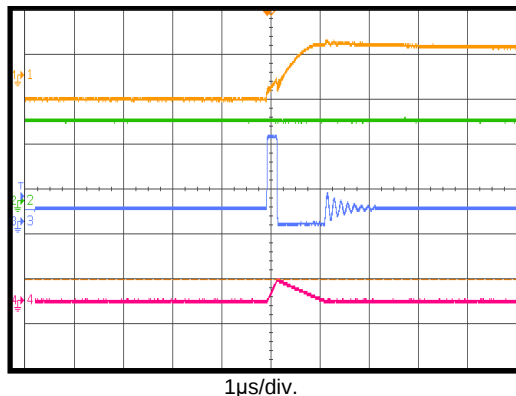

Input/Output Ripple


$I_{OUT} = 4A$

CH1:
 V_{OUT}/AC
20mV/div.

CH2: V_{IN}
10V/div.

CH1: V_{SW}
10V/div.

CH4: I_L
2A/div.

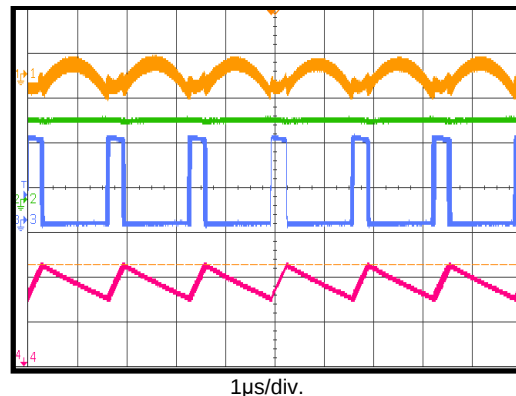

Input/Output Ripple


$I_{OUT} = 0A$, PWM

CH1:
 V_{OUT}/AC
20mV/div.

CH2: V_{IN}
10V/div.

CH1: V_{SW}
10V/div.

CH4: I_L
2A/div.

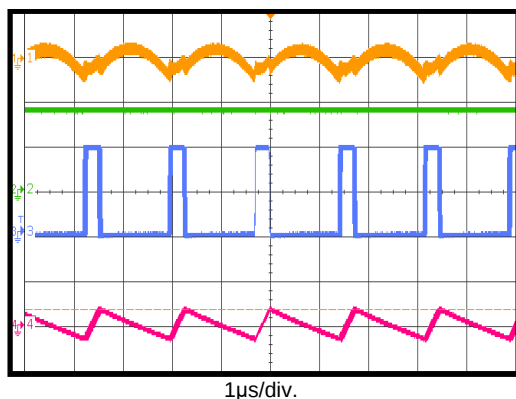

Start-Up through VIN


$I_{OUT} = 0A$, PWM

CH1: V_{OUT}
2V/div.

CH2: V_{IN}
10V/div.

CH1: V_{SW}
10V/div.

CH4: I_L
2A/div.

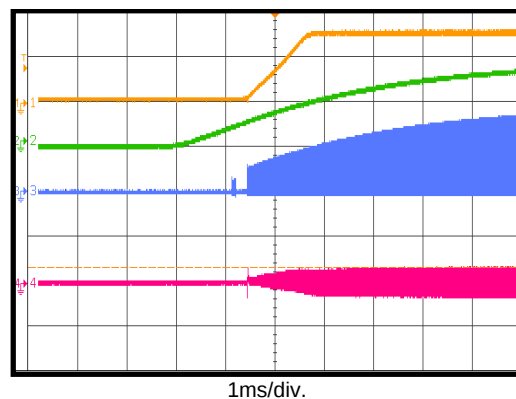

Start-Up through VIN


$I_{OUT} = 0A$, PFM

CH1: V_{OUT}
2V/div.

CH2: V_{IN}
10V/div.

CH1: V_{SW}
10V/div.

CH4: I_L
2A/div.

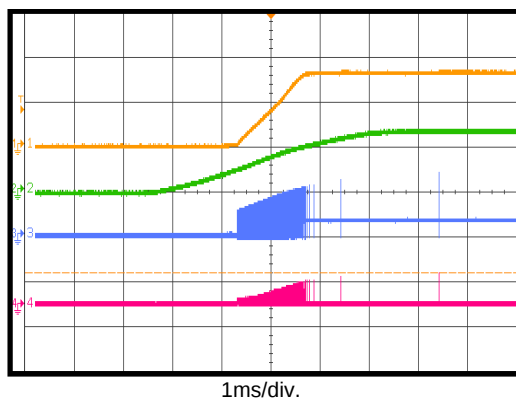

Start-Up through VIN


$I_{OUT} = 4A$

CH1: V_{OUT}
2V/div.

CH2: V_{IN}
10V/div.

CH1: V_{SW}
10V/div.

CH4: I_L
2A/div.

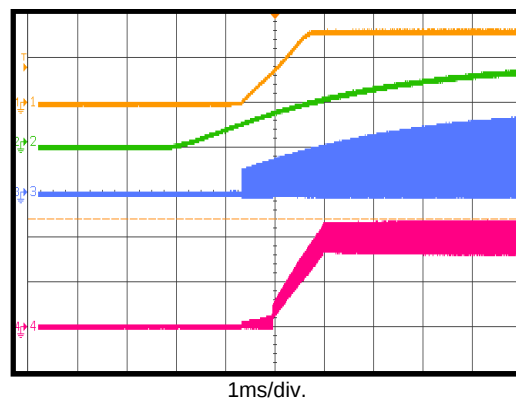


EVB TEST RESULTS (continued)

$V_{IN} = 19V$, $V_{OUT} = 3.3V$, $L = 3.3\mu H$, $T_A = 25^\circ C$, unless otherwise noted.

Shutdown through VIN

$I_{OUT} = 0A$, PWM


CH1: V_{OUT}
2V/div.
CH2: V_{IN}
10V/div.
CH1: V_{SW}
10V/div.
CH4: I_L
2A/div.

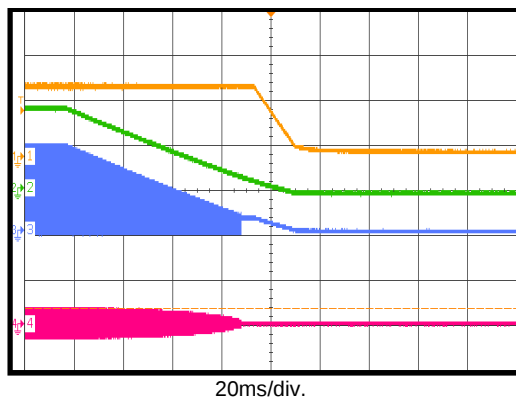

Shutdown through VIN

$I_{OUT} = 0A$, PFM


CH1: V_{OUT}
2V/div.
CH2: V_{IN}
10V/div.
CH1: V_{SW}
10V/div.
CH4: I_L
2A/div.

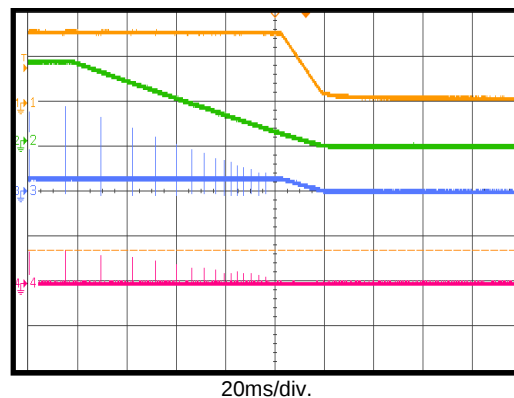

Shutdown through VIN

$I_{OUT} = 4A$


CH1: V_{OUT}
2V/div.
CH2: V_{IN}
10V/div.
CH1: V_{SW}
10V/div.
CH4: I_L
2A/div.

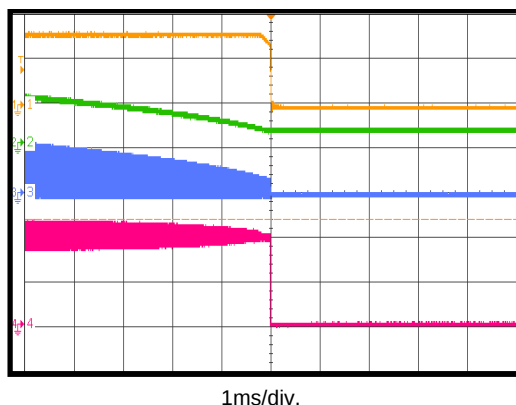

Start-Up through EN

$I_{OUT} = 0A$, PWM


CH1: V_{OUT}
2V/div.
CH2: V_{EN}
5V/div.
CH1: V_{SW}
10V/div.
CH4: I_L
2A/div.

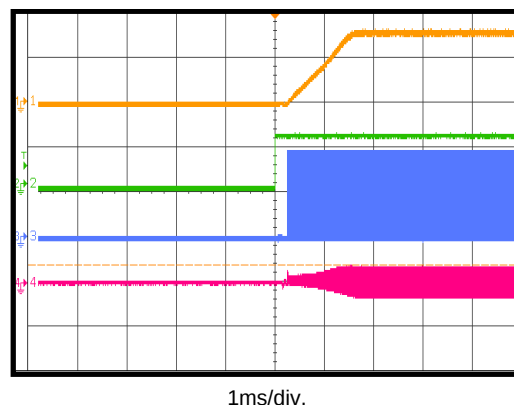

Start-Up through EN

$I_{OUT} = 0A$, PFM


CH1: V_{OUT}
2V/div.
CH2: V_{EN}
5V/div.
CH1: V_{SW}
10V/div.
CH4: I_L
2A/div.

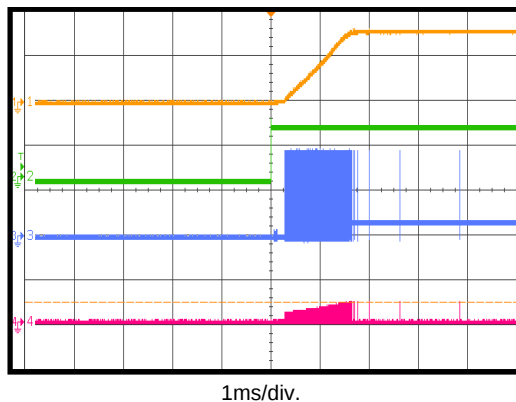

Start-Up through EN

$I_{OUT} = 4A$

CH1: V_{OUT}
2V/div.
CH2: V_{EN}
5V/div.
CH1: V_{SW}
10V/div.
CH4: I_L
2A/div.

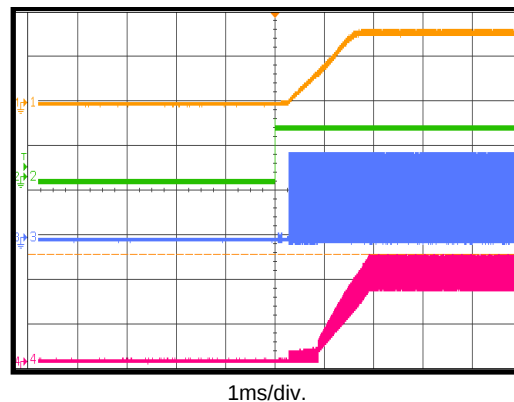

EVB TEST RESULTS (continued)

$V_{IN} = 19V$, $V_{OUT} = 3.3V$, $L = 3.3\mu H$, $T_A = 25^\circ C$, unless otherwise noted.

Shutdown through EN


$I_{OUT} = 0A$, PWM

CH1: V_{OUT}
2V/div.

CH2: V_{EN}
5V/div.

CH3: V_{SW}
10V/div.

CH4: I_L
2A/div.

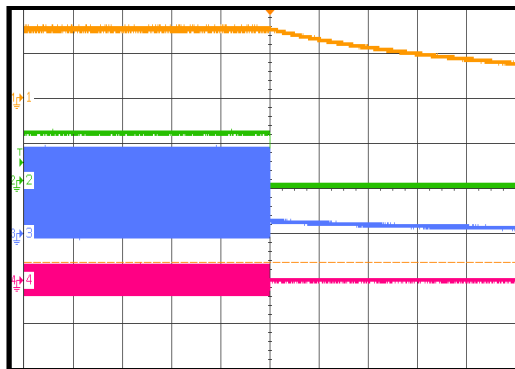

200ms/div.

Shutdown through EN


$I_{OUT} = 0A$, PFM

CH1: V_{OUT}
2V/div.

CH2: V_{EN}
5V/div.

CH3: V_{SW}
10V/div.

CH4: I_L
2A/div.

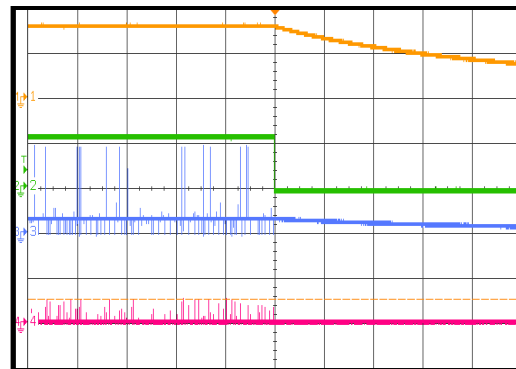

200ms/div.

Shutdown through EN


$I_{OUT} = 4A$

CH1: V_{OUT}
2V/div.

CH2: V_{EN}
5V/div.

CH3: V_{SW}
10V/div.

CH4: I_L
2A/div.

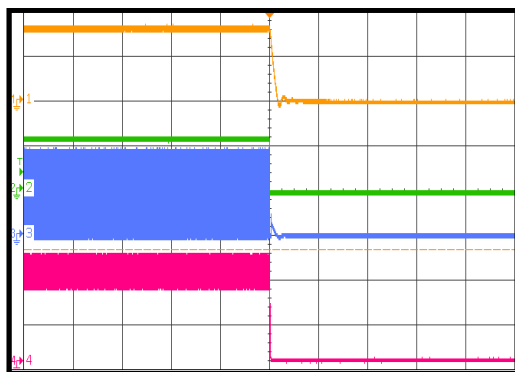

200μs/div.


Short-Circuit Entry

CH1: V_{OUT}
2V/div.

CH2: V_{IN}
10V/div.

CH3: V_{SW}
10V/div.

CH4: I_L
2A/div.

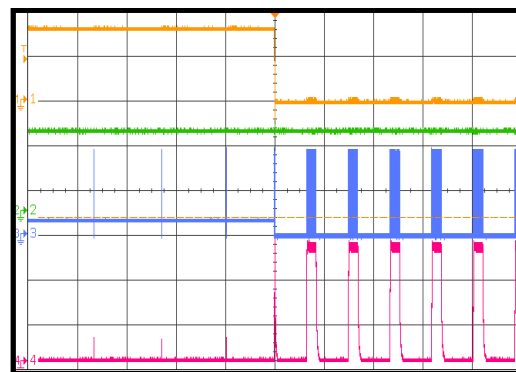

5ms/div.


Short-Circuit Recovery

CH1: V_{OUT}
2V/div.

CH2: V_{EN}
10V/div.

CH3: V_{SW}
10V/div.

CH4: I_L
2A/div.

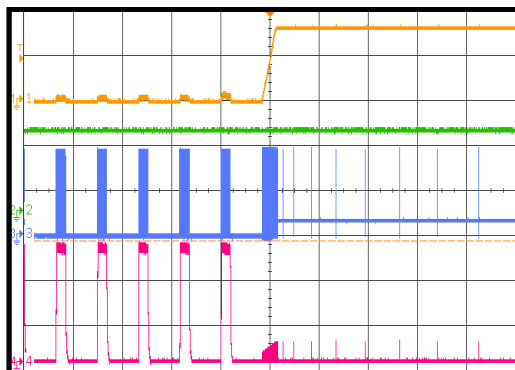

5ms/div.

Load Transient


$I_{OUT} = 2A$ to $4A$

CH1:
 V_{OUT}/AC
100mV/div.

CH2: V_{EN}
10V/div.

CH3: V_{SW}
10V/div.

CH4: I_{OUT}
2A/div.

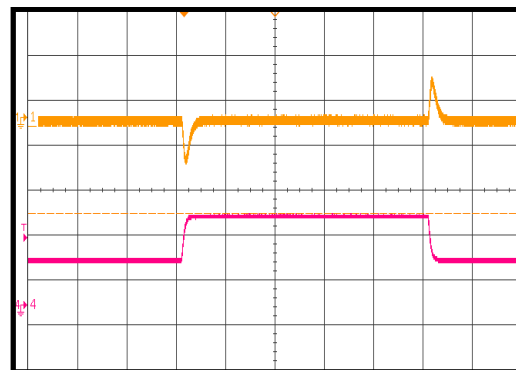

100μs/div.

PCB LAYOUT

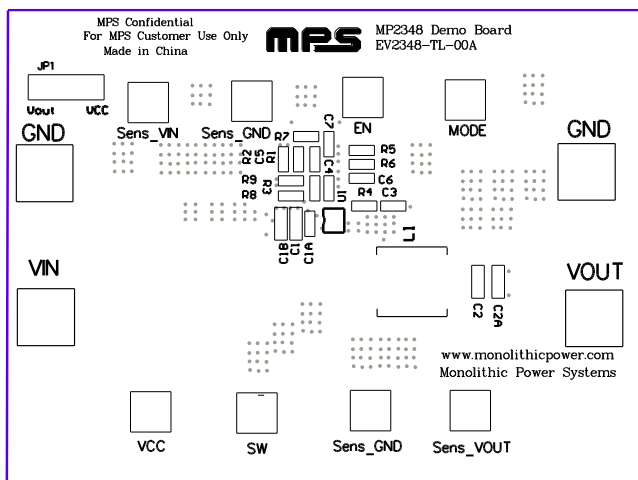


Figure 2: Top Silk Layer

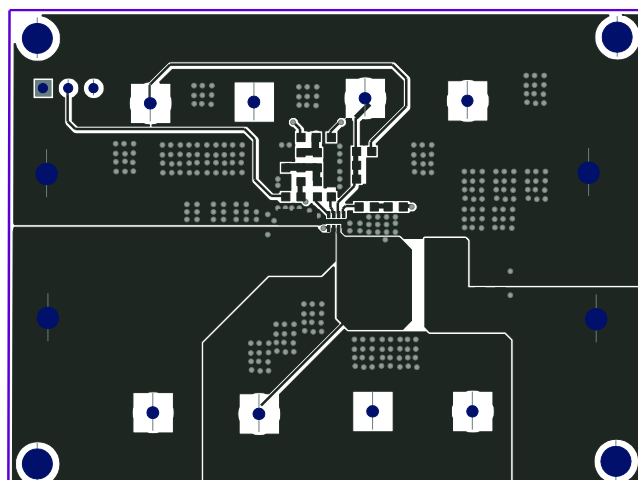


Figure 3: Top Layer

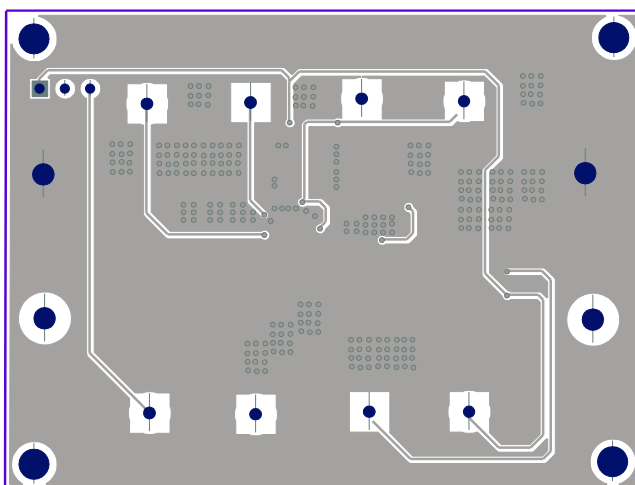


Figure 4: Bottom Layer

Revision History

Revision #	Revision Date	Description	Pages Updated
1.0	10/15/2020	Initial Release	-

Notice: The information in this document is subject to change without notice. Please contact MPS for current specifications. Users should warrant and guarantee that third-party Intellectual Property rights are not infringed upon when integrating MPS products into any application. MPS will not assume any legal responsibility for any said applications.