

DESCRIPTION

The EV4000DS-00C is an evaluation board for the MP4000. The EV4000DS-00C is a high efficiency step-down converter designed for driving high brightness Light Emitting Diodes (LEDs).

The EV4000DS-00C can supply a maximum output current of 350mA to drive 10 to 40V LED strings from a wide input voltage 180 to 260VAC with 50/60Hz.

ELECTRICAL SPECIFICATION

Parameter	Symbol	Value	Units
Input Voltage	VAC	180 – 260	V
Output Voltage	V _{OUT}	10 – 40	V
Output Current	I _{OUT}	350	mA

FEATURES

- Constant-current LED Driver
- Power MOSFET Zero-Current Turn On
- High Efficiency and Reliability in Boundary Mode Operation
- Low 0.9mA Operation Current
- PWM or DC Input Burst Dimming Control
- Hiccup Short Circuit Protection
- UVLO, Thermal Shutdown
- Maximum Frequency is Limited to 110kHz
- Available in SOIC8 Package

APPLICATIONS

- DC/DC or AC/DC LED Driver Application
- General Illumination
- Industrial LED Lighting
- LED Light

For MPS green status, please visit MPS website under Quality Assurance. "MPS" and "The Future of Analog IC Technology", are Registered Trademarks of Monolithic Power Systems, Inc.



Warning: Although this board is designed to satisfy safety requirements, the engineering prototype has not been agency approved. Therefore, all testing should be performed using an isolation transformer to provide the AC input to the prototype board.

EV4000DS-00C EVALUATION BOARD




FRONT




BACK

(L x W x H) 2.4" x 1.2" x 0.5"

Board Number	MPS IC Number
EV4000DS-00C	MP4000DS

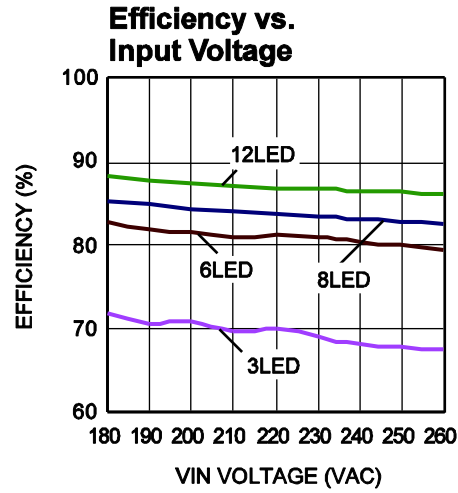

EVALUATION BOARD SCHEMATIC

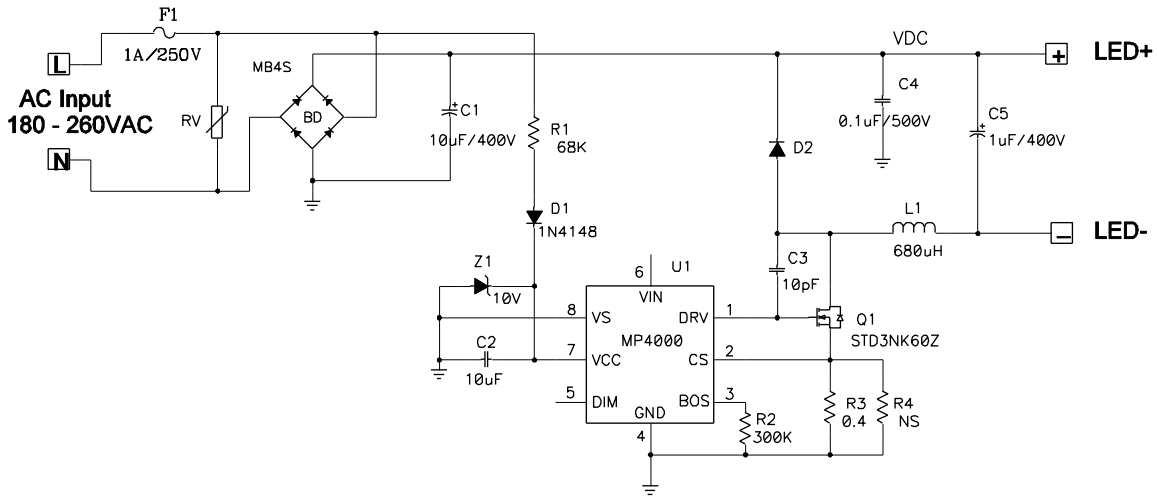










EV4000-00C BILL OF MATERIALS

Qty	RefDes	Value	Description	Package	Reference	Manufacturer P/N
1	C1	10 μ F	CAP., Alum., 10 μ F 400V	12.5x20x5	Nichicon	UVR2G100MHD
1	C2	10 μ F	Ceramic Cap., 16V, X5R	0805	TDK	C2012X5R1C106M
1	C3	10pF	Ceramic Cap., 630V, X7R	0805	Kemet	C0805C100KBRACU
1	C4	0.1 μ F	Ceramic Cap., 500V, X7R	1812	Johanson Dielectrics	501S43W104KV4E
1	C5	1 μ F	1 μ F Cap., 400V, 10%	6.3x11x2.5	United Chemi-Con	EKMG401ELL1R0 MF11D
1	D2	1A	600V 1A fast Diode	Through Hold	STmicroelectronics	STTH2R06
1	D1	Diode	1N4148, 80V, 0.1A	SOD-523	Rohm Semi	1SS400TE61CT-ND
1	BD	0.5A	Bridg Diode, SMD, 400V, 0.5A	SOIC-4	Fairchile Semi	MB4S
1	Z1	10V	Zener diode	SOD-123	Diode	DDZ9697-7
1	F1	2A	Fuse 2A/250V	Through Hold	LittleFuse	0263002.MAT1L
1	L1	680 μ H	Inductor, 680 μ H/1.3A	12x12x10	WURTH Elektronik	7447709681
1	R1	68k	1/4W Res., 5%	Through Hold	Digikey	
1	R2	300k	Film Res., 1%	0603	Digikey	
1	R3	0.4 Ω	1/3W Film Res., 1%	0805	Cyntec	
1	R4	NS				
1	RV	ZNR	430V Transient Absorbers	Through Hold	Panasonic	ERZ-V10D431
1	Q1		N_C MOSFET 600V	D Pak	ST Microelectr	STD3NK60ZT4
1	U1		DC-DC Converter	SOIC8	MPS	MP4000DS

EVB TEST RESULTS

Performance waveforms are tested on the evaluation board.

$V_{IN} = 180V_{AC}$ to $260V_{AC}$, $V_{OUT} = 10V$ to $40V$, $L = 680\mu H$, $T_A = 25^\circ C$, unless otherwise noted.

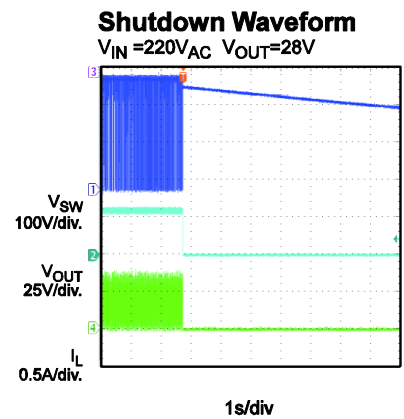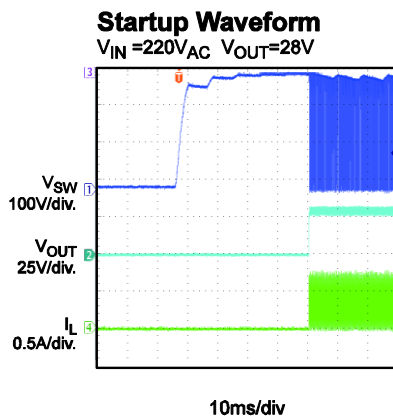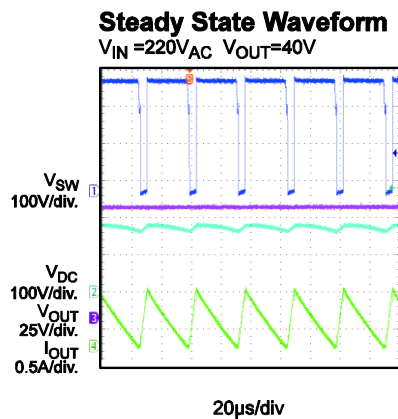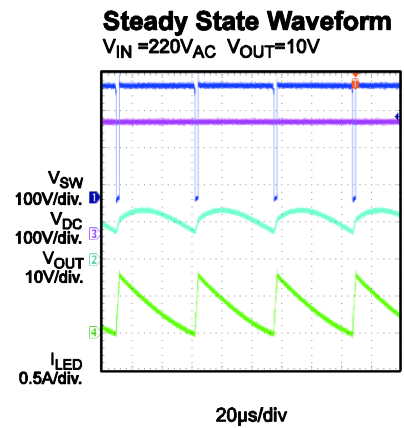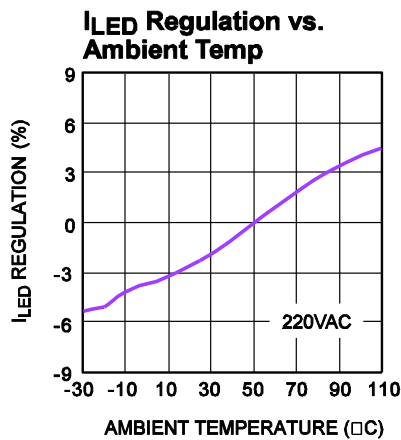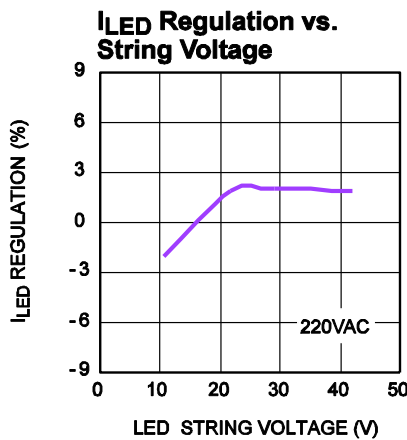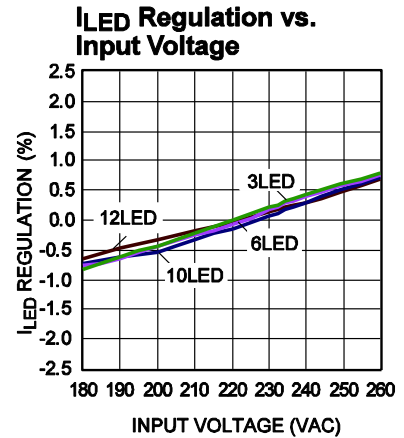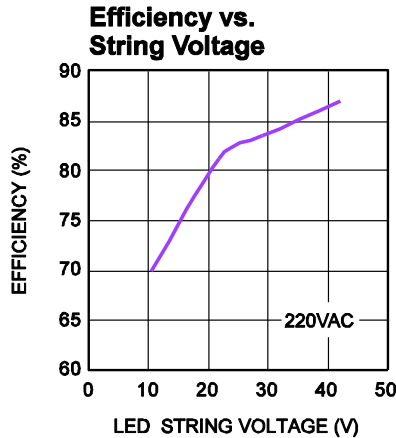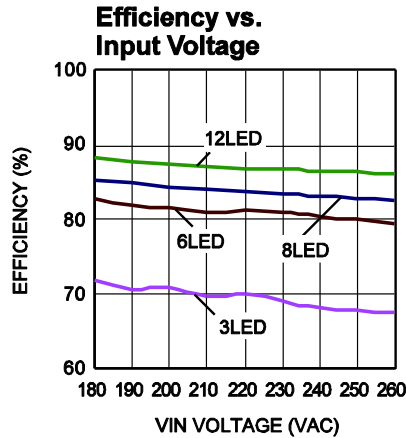

PRINTED CIRCUIT BOARD LAYOUT

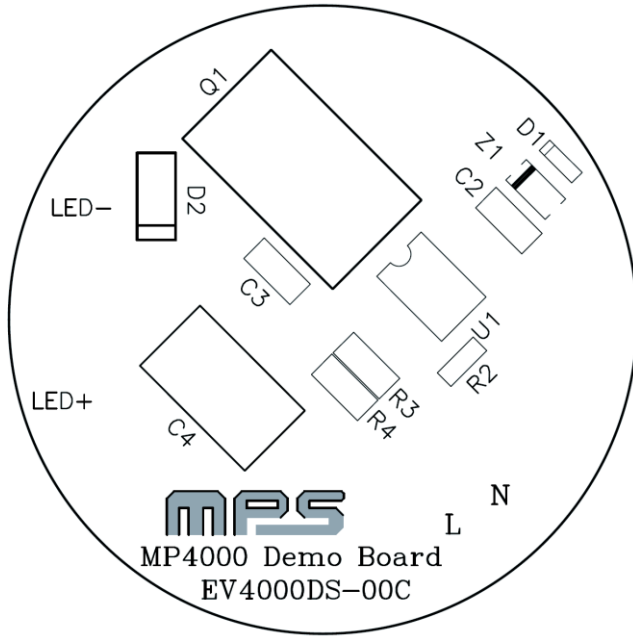


Figure 1—Top Silk Layer

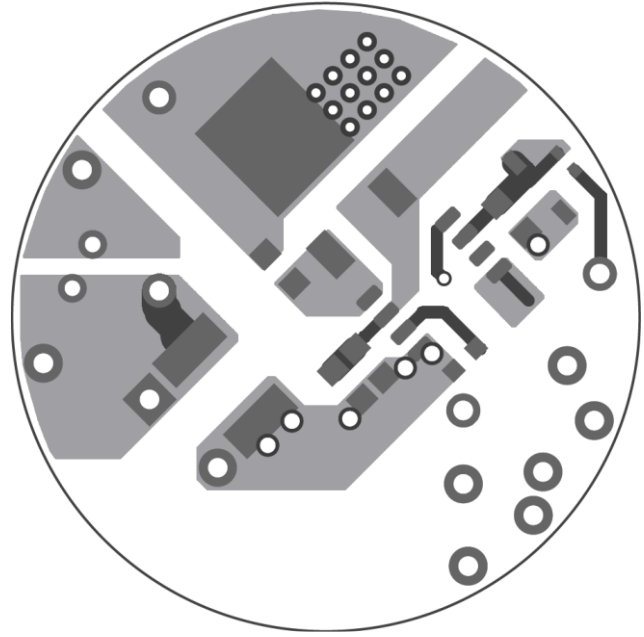


Figure 2—Top Layer

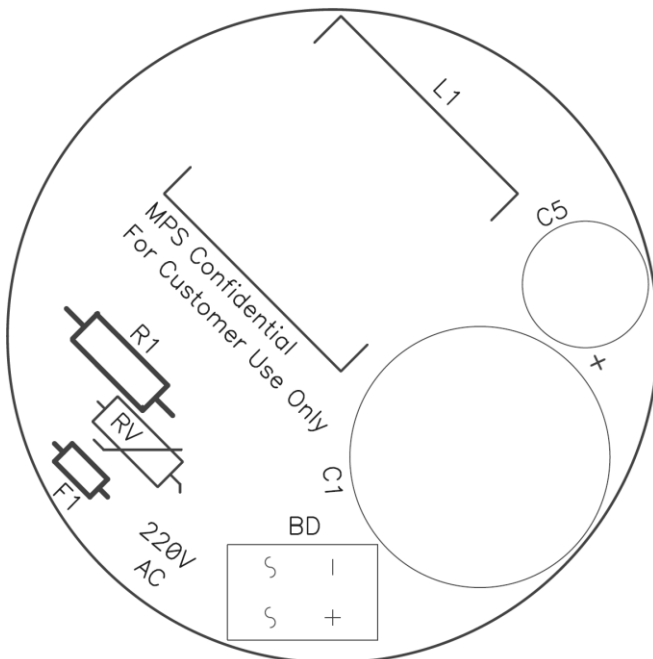


Figure 3—Bottom Silk Layer

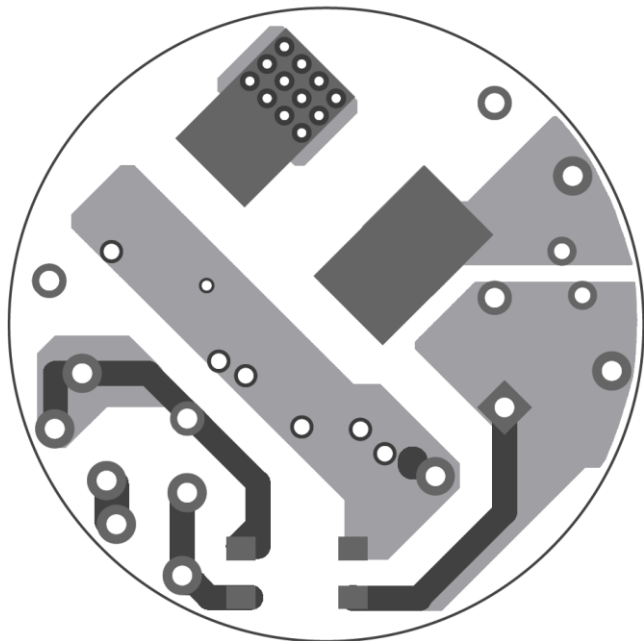


Figure 4—Bottom Layer

QUICK START GUIDE

1. Turn off the AC Power Supply.
2. Connect the LED string between “+” (anode of LED string) and “-” (cathode of LED string).
3. Connect the AC input voltage between the AC terminals (“N” and “L”) as shown on the board.
4. Set AC Power Supply to $180V \leq AC \text{ input} \leq 260V$.
5. Turn on the AC Power Supply.

CAUTION:

There is no galvanic isolation on the EVB board. Be careful when doing the test. To prevent damage to equipments and EVB board, isolation is suggested to either the test equipments or the EVB board.

NOTICE: The information in this document is subject to change without notice. Please contact MPS for current specifications. Users should warrant and guarantee that third party Intellectual Property rights are not infringed upon when integrating MPS products into any application. MPS will not assume any legal responsibility for any said applications.