



# MPQ3324

## 8-Channel, 100mA/Ch, LED Driver with Separated PWM Analog Dimming and I<sup>2</sup>C Interface, AEC-Q100

### DESCRIPTION

The MPQ3324 is an 8-channel WLED driver that operates from a wide 4V to 16V input voltage range. The MPQ3324 applies 8 internal current sources in each LED string terminal. The LED current of each channel is set by an external current-setting resistor. Each channel has a maximum 100mA current (while  $V_{IN} \geq 4.5V$ ).

The device integrates an I<sup>2</sup>C interface. There are 10 different I<sup>2</sup>C addresses that can be configured via an external resistor. This means the MPQ3324 can support up to 10 ICs that have been cascaded to drive an LED array. Each channel can be enabled or disabled through the I<sup>2</sup>C.

The MPQ3324 employs both separated PWM dimming and analog dimming for each LED channel, with a 12-bit PWM dimming resolution and 6-bit analog dimming for each channel. To optimize EMI and EMC performance, The LED current ramping rate and phase shift can be configured.

The MPQ3324 can output a refresh signal from the RFSH/FLT pin. The refresh signal frequency can be set via the I<sup>2</sup>C.

Integrated protections include open-load protection, short-load protection, and over-temperature protection (OTP). The fault indicator pulls to low if a protection is triggered. Meanwhile, the corresponding fault register is set.

The MPQ3324 is AEC-Q100 qualified, and is available in QFN-24 (4mmx4mm).

### FEATURES

- Wide 4V to 16V Input Voltage Range
- 8 Channels, 100mA/Ch Maximum ( $V_{IN} \geq 4.5V$ )
- LED Current Configured via External Resistor
- 6-Bit Analog Dimming for Each Channel
- 12-Bit PWM Dimming for Each Channel
- Selectable 220Hz, 250Hz, 280Hz, or 330Hz PWM Dimming Frequency
- Refresh Signal Output
- I<sup>2</sup>C Interface
- 10 Addresses Configurable via External Resistor
- Configurable LED Current Slew Rate
- 80 $\mu$ s Phase Shift
- Fault Indicator
- LED Open Protection
- LED Short Protection, Configurable Threshold
- Under-Voltage Lockout (UVLO)
- Over-Temperature Protection (OTP)
- ELV Directive II Compliant
- Available in a QFN-24 (4mmx4mm) Package with Wettable Flank
- AEC-Q100 Grade 1

### APPLICATIONS

- Automotive Lights
- Automotive Displays
- Instruments Clusters
- General Industrial Displays

All MPS parts are lead-free, halogen-free, and adhere to the RoHS directive. For MPS green status, please visit the MPS website under Quality Assurance. "MPS", the MPS logo, and "Simple, Easy Solutions" are trademarks of Monolithic Power Systems, Inc. or its subsidiaries.

## TYPICAL APPLICATION

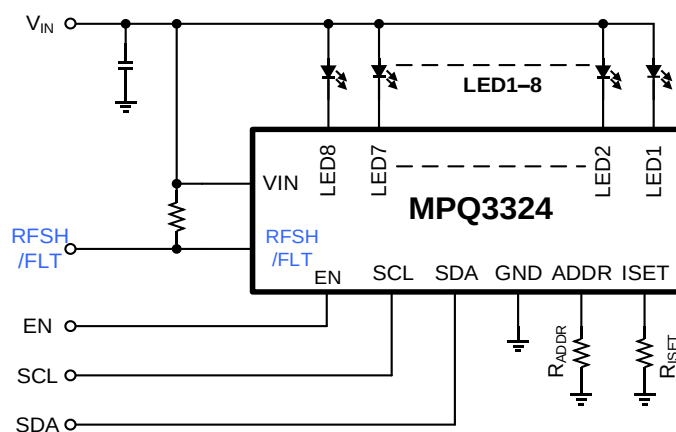


Figure 1: Typical Application Circuit

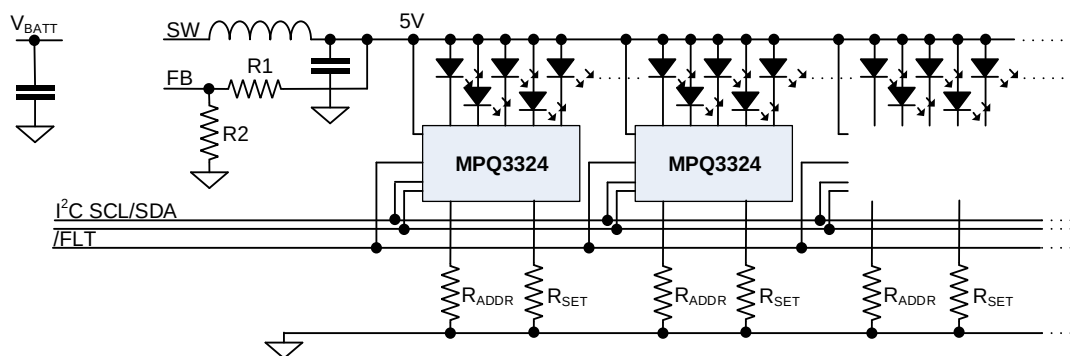


Figure 2: System Application Circuit

## ORDERING INFORMATION

| Part Number*    | Package          | Top Marking | MSL Rating |
|-----------------|------------------|-------------|------------|
| MPQ3324GRE-AEC1 | QFN-24 (4mmx4mm) | See Below   | 1          |

\* For Tape & Reel, add suffix –Z (e.g. MPQ3324GRE-AEC1–Z).

## TOP MARKING

**MPSYWW**


**MP3324**

**LLLLLL**

**E**

MPS: MPS prefix  
Y: Year code  
WW: Week code  
MP3324: Part number  
LLLLLL: Lot number  
E: Wettable lead flank

## PACKAGE REFERENCE

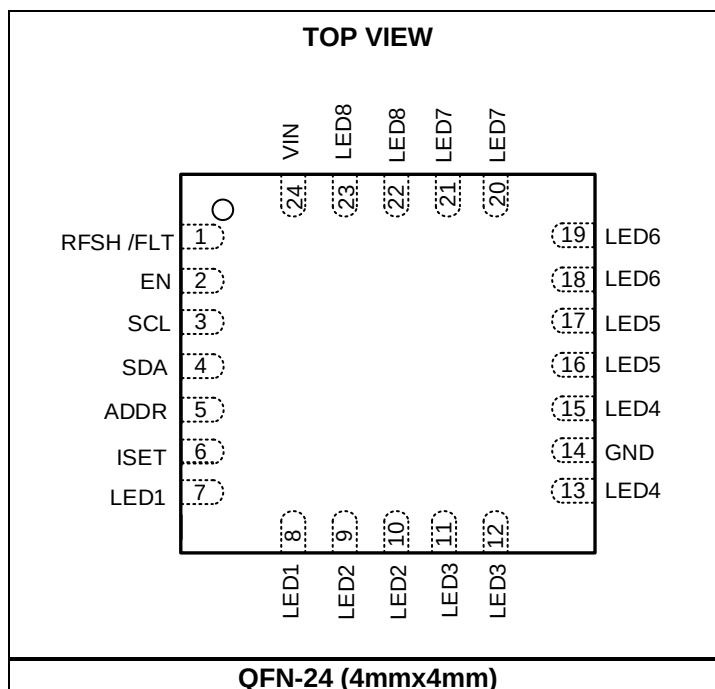

## PIN FUNCTIONS

| Pin #  | Name     | Description                                                                                                                                                                                                                                                                      |
|--------|----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1      | RFSH/FLT | <b>Refresh signal output or fault flag.</b> If the FLTEN bit is set to 0, the RFSH/FLT pin outputs a synchronized signal that is set by the FRFSH9:0 register. If the FLTEN bit is set to 1, RFSH/FLT is used to indicate fault conditions, and is pulled low if a fault occurs. |
| 2      | EN       | <b>Enable control.</b> Pull EN low to disable the IC. Pull EN high to enable the IC.                                                                                                                                                                                             |
| 3      | SCL      | <b>I<sup>2</sup>C interface clock input.</b>                                                                                                                                                                                                                                     |
| 4      | SDA      | <b>I<sup>2</sup>C interface data input.</b>                                                                                                                                                                                                                                      |
| 5      | ADDR     | <b>I<sup>2</sup>C address setting.</b> Configure the I <sup>2</sup> C addresses by attaching different resistors from ADDR to GND. ADDR sets the 4LSB of the I <sup>2</sup> C address. There are 10 configurable addresses.                                                      |
| 6      | ISSET    | <b>LED current setting.</b> Tie a current-setting resistor from ISET to ground to configure the current in each LED string.                                                                                                                                                      |
| 7, 8   | LED1     | <b>LED channel 1 current input.</b> Connect the LED channel 1 cathode to this pin. Each channel has two LED1 pins, and both LED1 pins must be connected to LED channel 1 cathode.                                                                                                |
| 9, 10  | LED2     | <b>LED channel 2 current input.</b> Connect the LED channel 2 cathode to this pin. Each channel has two LED2 pins, and both LED2 pins must be connected to LED channel 2 cathode.                                                                                                |
| 11, 12 | LED3     | <b>LED channel 3 current input.</b> Connect the LED channel 3 cathode to this pin. Each channel has two LED3 pins, and both LED3 pins must be connected to LED channel 3 cathode.                                                                                                |
| 13, 15 | LED4     | <b>LED channel 4 current input.</b> Connect the LED channel 4 cathode to this pin. Each channel has two LED4 pins, and both LED4 pins must be connected to LED channel 4 cathode.                                                                                                |
| 14     | GND      | <b>Ground.</b>                                                                                                                                                                                                                                                                   |
| 16, 17 | LED5     | <b>LED channel 5 current input.</b> Connect the LED channel 5 cathode to this pin. Each channel has two LED5 pins, and both LED5 pins must be connected to LED channel 5 cathode.                                                                                                |
| 18, 19 | LED6     | <b>LED channel 6 current input.</b> Connect the LED channel 6 cathode to this pin. Each channel has two LED6 pins, and both LED6 pins must be connected to LED channel 6 cathode.                                                                                                |
| 20, 21 | LED7     | <b>LED channel 7 current input.</b> Connect the LED channel 7 cathode to this pin. Each channel has two LED7 pins, and both LED7 pins must be connected to LED channel 7 cathode.                                                                                                |
| 22, 23 | LED8     | <b>LED channel 8 current input.</b> Connect the LED channel 8 cathode to this pin. Each channel has two LED8 pins, and both LED8 must be connected to LED channel 8 cathode.                                                                                                     |
| 24     | VIN      | <b>Power supply input.</b> VIN supplies power to the IC. Connect a capacitor from VIN to GND.                                                                                                                                                                                    |

## ABSOLUTE MAXIMUM RATINGS <sup>(1)</sup>

V<sub>IN</sub> .....-0.3V to +18V  
V<sub>LED1</sub> to V<sub>LED8</sub>.....-0.5V to +18V  
All other pins .....-0.3V to +5V  
Junction temperature .....150°C  
Lead temperature .....260°C  
Storage temperature ..... -65°C to +150°C  
Continuous power dissipation (T<sub>A</sub> = 25°C) <sup>(2)</sup>  
QFN-24 (4mmx4mm) ..... 2.97W

## ESD Ratings

Human body model (HBM) .....-2kV to +1.25kV  
Charged device model (CDM) ..... ±2kV

## Recommended Operating Conditions <sup>(3)</sup>

Supply voltage (V<sub>IN</sub>) .....4V to 16V

Operating junction temp (T<sub>J</sub>).....-40°C to +150°C

**Thermal Resistance <sup>(4)</sup>      θ<sub>JA</sub>      θ<sub>JC</sub>**

QFN-24 (4mmx4mm) .....42.....9.....°C/W

### Notes:

- Exceeding these ratings may damage the device.
- The maximum allowable power dissipation is a function of the maximum junction temperature, T<sub>J</sub> (MAX), the junction-to-ambient thermal resistance, θ<sub>JA</sub>, and the ambient temperature, T<sub>A</sub>. The maximum allowable continuous power dissipation at any ambient temperature is calculated by P<sub>D</sub> (MAX) = (T<sub>J</sub> (MAX) - T<sub>A</sub>) / θ<sub>JA</sub>. Exceeding the maximum allowable power dissipation can cause excessive die temperature, and the regulator may go into thermal shutdown. Internal thermal shutdown circuitry protects the device from permanent damage.
- The device is not guaranteed to function outside of its operating conditions.
- Measured on JESD51-7, 4-layer PCB.

## ELECTRICAL CHARACTERISTICS

V<sub>IN</sub> = 5V, V<sub>EN</sub> = 3.5V, T<sub>J</sub> = -40°C to +125°C, typical value is at T<sub>A</sub> = 25°C, unless otherwise noted.

| Parameter                                         | Symbol                  | Condition                                                          | Min   | Typ  | Max   | Units |
|---------------------------------------------------|-------------------------|--------------------------------------------------------------------|-------|------|-------|-------|
| Input Supply Voltage                              |                         |                                                                    |       |      |       |       |
| Input voltage range                               | V <sub>IN</sub>         |                                                                    | 4     |      | 16    | V     |
| Quiescent supply current                          | I <sub>Q</sub>          |                                                                    |       |      | 4     | mA    |
| Shutdown supply current                           | I <sub>ST</sub>         | V <sub>EN</sub> = 0V, V <sub>IN</sub> = 16V                        |       |      | 2     | μA    |
| Input UVLO threshold                              | V <sub>IN_UVLO</sub>    | Rising edge                                                        | 3.45  | 3.7  | 3.95  | V     |
|                                                   |                         | Falling edge                                                       | 3.15  | 3.5  | 3.85  | V     |
| Enable                                            |                         |                                                                    |       |      |       |       |
| EN rising threshold                               | V <sub>EN_ON</sub>      | EN rising                                                          | 2.1   |      |       | V     |
| EN falling threshold                              | V <sub>EN_OFF</sub>     | EN falling                                                         |       |      | 0.8   | V     |
| EN pull-down resistor                             | R <sub>EN</sub>         |                                                                    |       | 1    |       | MΩ    |
| RFSH/FLT                                          |                         |                                                                    |       |      |       |       |
| RFSH/FLT output frequency                         | f <sub>RFSH</sub>       | FRFSH9:0 = 0x1A9,<br>FPWM2:0 = 01                                  | 285   | 300  | 315   | Hz    |
| RFSH/FLT pull-down resistor                       |                         | FLTEN = 1, fault is triggered                                      |       |      | 100   | Ω     |
| LED Regulator                                     |                         |                                                                    |       |      |       |       |
| ISET voltage                                      | V <sub>ISET</sub>       | T <sub>A</sub> = 25°C                                              | 1.174 | 1.2  | 1.226 | V     |
| LED current                                       | I <sub>LED</sub>        | R <sub>ISET</sub> = 20kΩ, ICHx5:0 = 0x3F                           | -3%   | 50   | +3%   | mA    |
|                                                   |                         | R <sub>ISET</sub> = 20kΩ, ICHx5:0 = 0x3F,<br>T <sub>A</sub> = 25°C | -2%   | 50   | +2%   | mA    |
| Current sink headroom                             | V <sub>LEDX</sub>       | I <sub>LED</sub> = 40mA                                            |       | 150  | 210   | mV    |
| Dimming                                           |                         |                                                                    |       |      |       |       |
| PWM frequency                                     | f <sub>PWM</sub>        |                                                                    | 230   | 245  | 260   | Hz    |
| PWM duty step                                     | t <sub>PWM</sub>        | 12-bit resolution, f <sub>PWM</sub> = 250Hz                        |       | 0.97 |       | μs    |
| Phase shift                                       | t <sub>DELAY</sub>      | PS_EN = 1                                                          |       | 80   |       | μs    |
| LED current step                                  |                         | I <sub>LED</sub> = 50mA, analog dimming step                       |       | 0.8  |       | mA    |
| LED current slew rate in PWM dimming              |                         | SLEW2:0 = 01, rising edge                                          |       | 5    |       | μs    |
|                                                   |                         | SLEW1:0 = 11, rising edge                                          |       | 20   |       | μs    |
| Protection                                        |                         |                                                                    |       |      |       |       |
| Short LED string protection threshold             | V <sub>SLP</sub>        | STH1:0 = 01                                                        | 2.75  | 3    | 3.25  | V     |
| Short LED string protection time                  | t <sub>SLP</sub>        | V <sub>LEDx</sub> > STH                                            |       | 4    |       | ms    |
| Short LED string protection hiccup time           | t <sub>SLP_HICCUP</sub> |                                                                    |       | 1    |       | ms    |
| Short LED string protection hiccup detection time | t <sub>SLP_DET</sub>    |                                                                    |       | 32   |       | μs    |
| Open LED string protection threshold              | V <sub>LED_UV</sub>     |                                                                    |       | 100  | 160   | mV    |

## ELECTRICAL CHARACTERISTICS

V<sub>IN</sub> = 5V, V<sub>EN</sub> = 3.5V, T<sub>J</sub> = -40°C to +125°C, typical value is at T<sub>A</sub> = 25°C, unless otherwise noted.

| Parameter                                                               | Symbol                  | Condition                 | Min  | Typ | Max  | Units |
|-------------------------------------------------------------------------|-------------------------|---------------------------|------|-----|------|-------|
| Open LED string protection time                                         | t <sub>LEDO</sub>       | V <sub>LEDx</sub> < 100mV |      | 4   |      | ms    |
| Open LED string protection hiccup time                                  | t <sub>SLP_HICCUP</sub> |                           |      | 1   |      | ms    |
| Open LED string protection hiccup detection time                        | V <sub>SLP_DET</sub>    |                           |      | 32  |      | μs    |
| Thermal shutdown threshold <sup>(5)</sup>                               | T <sub>ST</sub>         |                           |      | 170 |      | °C    |
| Thermal shutdown hysteresis <sup>(5)</sup>                              | T <sub>ST_HYS</sub>     |                           |      | 20  |      | °C    |
| <b>I<sup>2</sup>C Interface</b>                                         |                         |                           |      |     |      |       |
| Input logic low                                                         | V <sub>IL</sub>         |                           | 0    |     | 0.4  | V     |
| Input logic high                                                        | V <sub>IH</sub>         |                           | 1.3  |     |      | V     |
| Output logic low                                                        | V <sub>OL</sub>         | I <sub>LOAD</sub> = 3mA   |      |     | 0.4  | V     |
| SCL clock frequency                                                     | f <sub>SCL</sub>        |                           |      |     | 1200 | kHz   |
| SCL high time                                                           | t <sub>HIGH</sub>       |                           | 0.32 |     |      | μs    |
| SCL low time                                                            | t <sub>LOW</sub>        |                           | 0.12 |     |      | μs    |
| Data set-up time                                                        | t <sub>SU_DAT</sub>     |                           | 10   |     |      | ns    |
| Data hold time                                                          | t <sub>HD_DAT</sub>     |                           | 0    |     | 0.15 | μs    |
| Set-up time for repeated start                                          | t <sub>SU_STA</sub>     |                           | 0.16 |     |      | μs    |
| Hold time for start                                                     | t <sub>HD_STA</sub>     |                           | 0.16 |     |      | μs    |
| Set-up time for stop condition                                          | t <sub>SU_STO</sub>     |                           | 0.16 |     |      | μs    |
| SCL rising time after a repeated start condition and an acknowledge bit | t <sub>RCL1</sub>       |                           | 20   |     | 160  | ns    |
| SCL rising time                                                         | t <sub>RCL</sub>        |                           | 20   |     | 80   | ns    |
| SCL falling time                                                        | t <sub>FCL</sub>        |                           | 20   |     | 80   | ns    |
| SDA rising time                                                         | t <sub>RDA</sub>        |                           | 20   |     | 160  | ns    |
| SDA falling time                                                        | t <sub>FDA</sub>        |                           | 20   |     | 160  | ns    |
| Pulse width of suppressed spike                                         | t <sub>SP</sub>         |                           | 0    |     | 10   | ns    |
| Capacitance bus for each bus line                                       | C <sub>B</sub>          |                           |      |     | 400  | pF    |

### Notes:

5) Not tested in production. Guaranteed by characterization

## I<sup>2</sup>C TIMING INTERFACE DIAGRAM

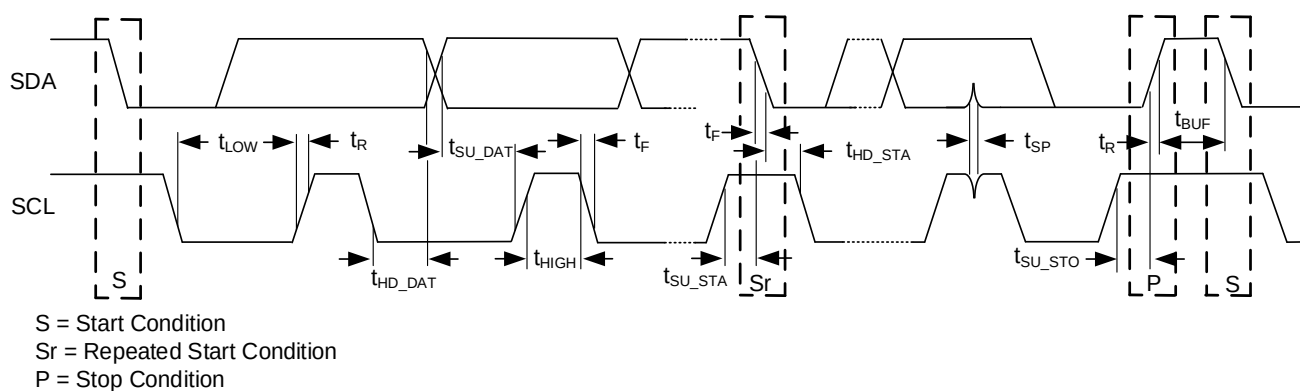



Figure 3: I<sup>2</sup>C Timing Diagram

# TYPICAL PERFORMANCE CHARACTERISTICS


V<sub>IN</sub> = 4.5V, LED = 8P/1S, I<sub>SET</sub> = 50mA/string, T<sub>A</sub> = 25°C, unless otherwise noted.

## Steady State

V<sub>IN</sub> = 4.5V, 8P/1S, 50mA/string

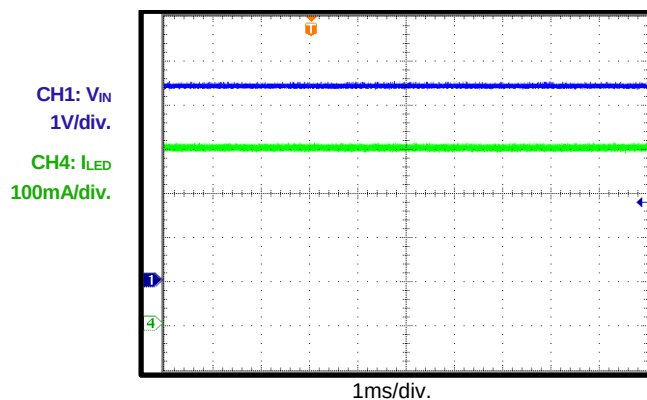


## Start-Up through the EN Bit

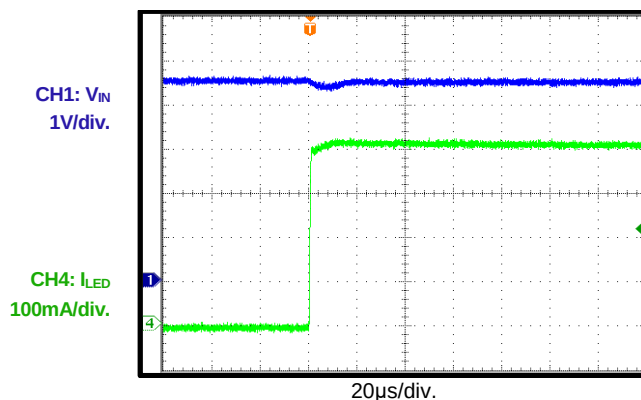


## Analog Dimming

25mA/string

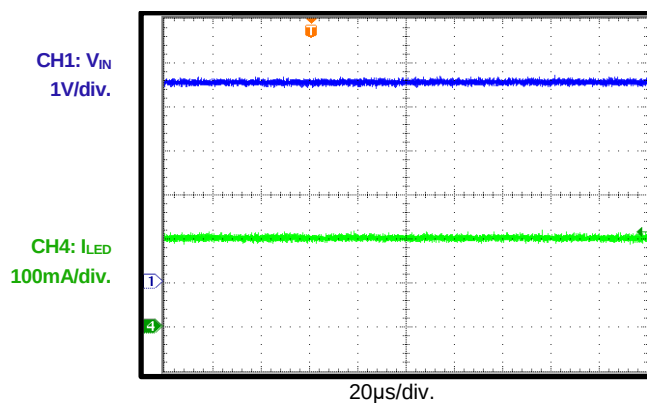


## Analog Dimming

0.78mA/string

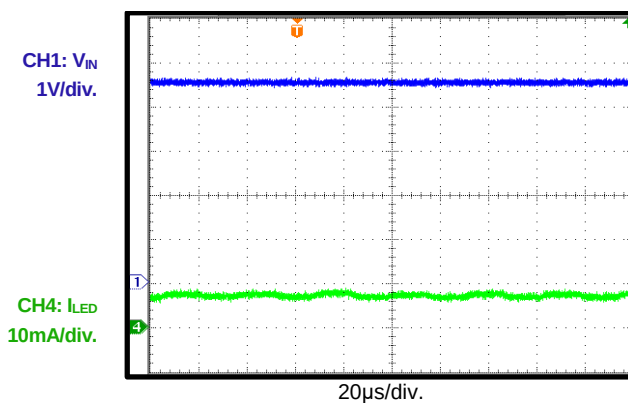


## PWM Dimming

PWM duty = 50%

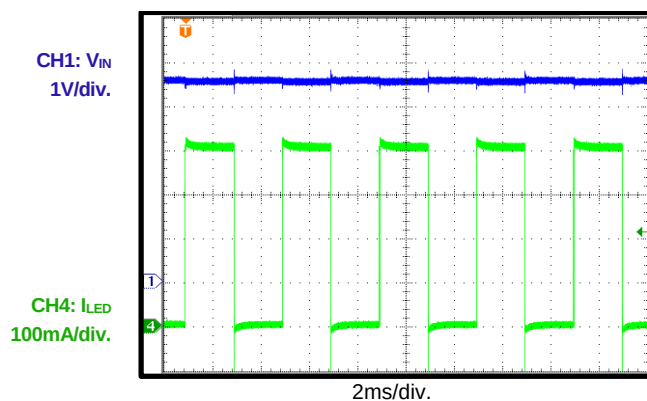

## PWM Dimming

PWM duty = 0.024%

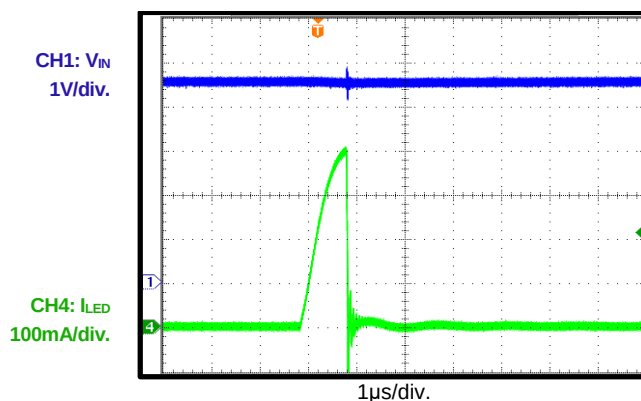




# TYPICAL PERFORMANCE CHARACTERISTICS

V<sub>IN</sub> = 4.5V, LED = 8P/1S, I<sub>SET</sub> = 50mA/string, T<sub>A</sub> = 25°C, unless otherwise noted.


## Slew Rate

PWM dimming, slew rate = 5μs

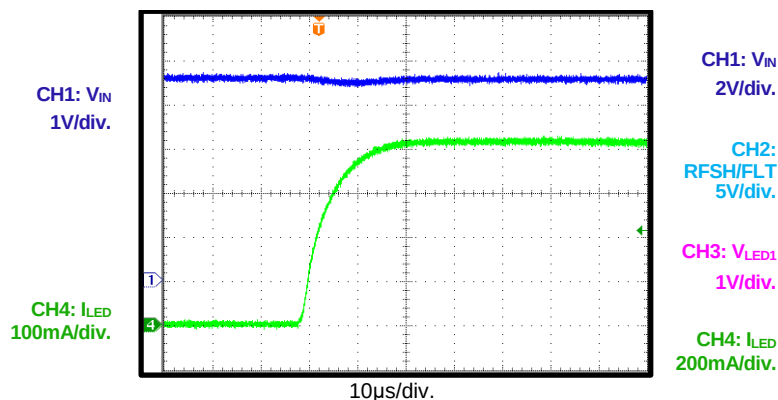


## LED Open-Load Protection

RFSH/FLT fault enabled

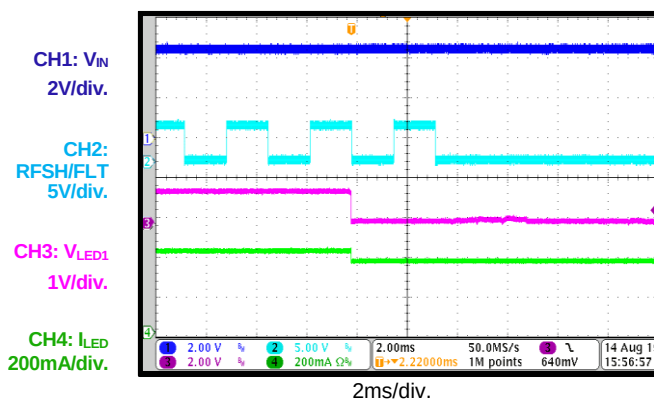


## Refresh Function

f<sub>PWM</sub> = 250Hz, RFRSH = 1FF

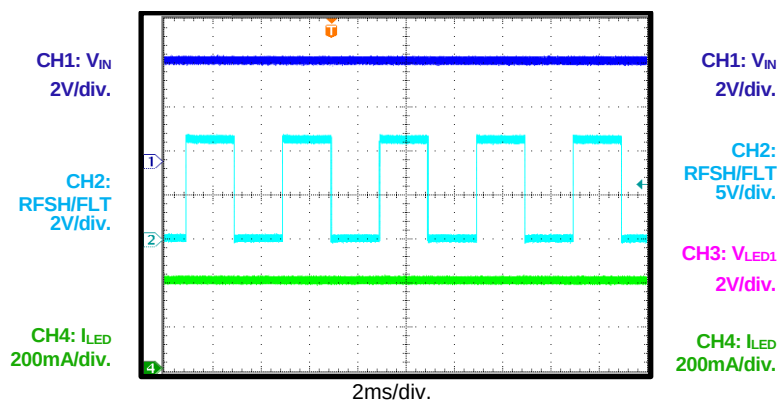


## LED Short Protection

RFSH/FLT fault enable

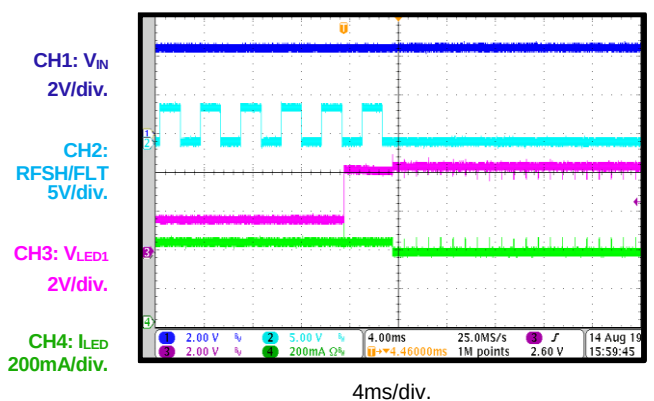

## FUNCTIONAL BLOCK DIAGRAM

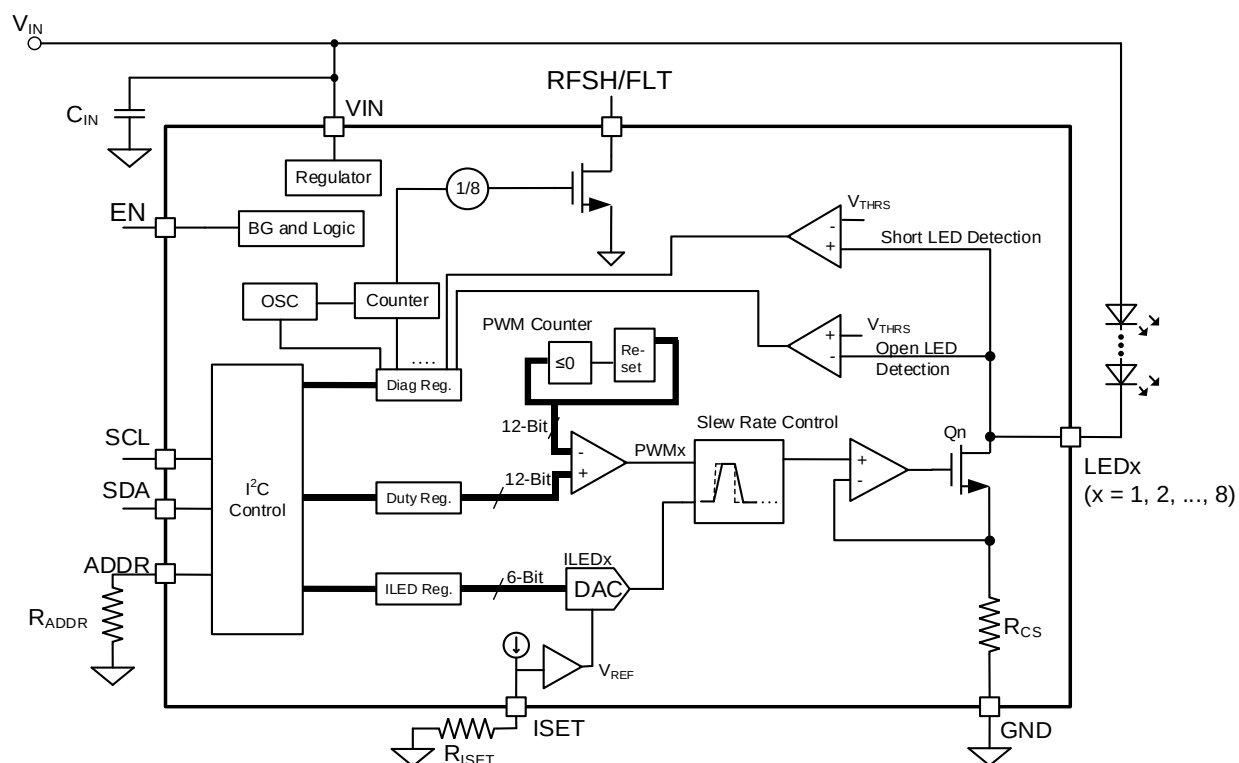

### Figure 4: Functional Block Diagram

## OPERATION

The MPQ3324 applies 8 internal current sources in each LED string terminal. The LED current of the channels are set via an external current-setting resistor. The maximum current is 100mA.

### Enable and Start-Up

When the input voltage exceeds the under-voltage lockout (UVLO) threshold, and EN exceeds the rising threshold, the MPQ3324 operates in standby mode, and the I<sup>2</sup>C is active. After setting the I<sup>2</sup>C register, pull the EN bit high to start up the system. The start-up sequence is listed below:

1. VIN
2. EN
3. I<sup>2</sup>C setting
4. Set the EN bit

### Channel Selection

Channels can be disabled by setting the corresponding CHxEN (e.g. x = 1, 2, ..., 8) bit low, or by connecting the channel to GND.

### Dimming

Each channel has its own 6-bit analog dimming register and 12-bit PWM dimming register. The MPQ3324 can use analog dimming and PWM dimming for each channel.

In analog dimming, the LED current amplitude changes when the analog dimming register changes. Change the ICHx (e.g. x = 1, 2, ..., 8) bit to set analog dimming for the corresponding channel. The LED current (I<sub>LED</sub>) can be estimated with Equation (1):

$$I_{LED} = \frac{ICHx}{63} \times ISET \quad (1)$$

Where ICHx sets the analog dimming code for the channel. If ICHx = 0, I<sub>LED</sub> is 0A.

In PWM dimming, the LED current is a PWM waveform. The LED current amplitude stays the same, and the LED current duty varies with the PWM dimming register.

The PWM dimming duty is set by PWMx (e.g. x = 1, 2, ..., 8). The duty (D) can be calculated with Equation (2):

$$D = \frac{PWMx}{4095} \quad (2)$$

Where PWMx is the PWM dimming duty code for each corresponding channel. The duty changes only when the 8MSB of the PWM duty register is written. When PWMx = 0, the corresponding I<sub>LED</sub> is 0A.

The PWM dimming frequency can be selected via register FPWM1:0. The potential frequencies are listed below:

- FPWM1:0 = 00: 220Hz
- FPWM1:0 = 01: 250Hz (default)
- FPWM1:0 = 10: 280Hz
- FPWM1:0 = 11: 330Hz

To avoid a glitch during normal operation, the following conditions must be met:

- Change the FPWM1:0 value only when the EN bit is set 0.
- Write the FPWM register and wait for a 10μs delay before writing to other registers.

### Phase Shift

A channel-by-channel phase shift function can be implemented. This function is enabled by setting the PS\_EN bit high.

When the phase shift function is enabled, the channel x + 1 (e.g. x = 1, 2, ..., 7) LED current rising edge is delayed for 80μs after channel x's LED current rising edge.

### SYNC Output for the LCD Refresh Frequency

The fault indicator function can be enabled by the FLTEN bit.

If FLTEN = 0, the fault indicator function is disabled. RFSH/FLT maintains the output refresh signal, even if a protection is triggered.

If FLTEN = 1, the fault indicator function is enabled, and the RFSH/FLT pin is pulled low if a protection occurs. Table 1 shows the details of the RFSH/FLT pin's output status.

Table 1: RFSH/FLT Pin Output Status

| FLTEN | RFSH/FLT Pin Output    |                 |                        |                 |
|-------|------------------------|-----------------|------------------------|-----------------|
|       | FRFSH9:0 = 0x000       |                 | FRFSH9:0 = 0x001~0x3FF |                 |
|       | No fault condition     | Fault condition | No fault condition     | Fault condition |
| 1     | Externally pulled high | Low             | Rectangle signal       | Low             |
| 0     | Externally pulled high |                 | Rectangle signal       |                 |

The refresh signal frequency is set by FRFSH9:0. If FRFSH9:0 = 0x000, then the RFSH/FLT pin outputs high. If FRFSH9:0 = 0x001~0x3FF, the RFSH/FLT pin outputs a rectangle signal. The refresh frequency can be calculated with Equation (3):

$$f_{\text{REFRESH}} = \frac{127500}{\text{FRFSH9:0}} \quad (3)$$

Note that if FPWM1:0 = 01, the PWM dimming frequency is 250Hz. If FRFSH9:0 = 0x000, the RFSH/FLT pin outputs high.

The refresh frequency is also related to the PWM dimming frequency, estimated with Equation (4):

$$f_{\text{REFRESH}} = \frac{127500}{\text{FRFSH}} \times \frac{f_{\text{PWM}}}{250} \quad (\text{Hz}) \quad (4)$$

Where  $f_{\text{REFRESH}}$  is the refresh frequency, FRFSH is the value of FRFSH9:0, and  $f_{\text{PWM}}$  is PWM dimming frequency set by register FPWM1:0 (it can be either 200Hz, 250Hz, 280Hz, or 330Hz).

For this equation, FRFSH9:0 > 0.

Note that all numbers in the equation have a decimal base, and that the refresh frequency does not change until the 8MSB are written.

The internal oscillator is divided by 8. As the clock refreshes the frequency generation, the FRFSH9:0 register sets the counter number (see Figure 5).

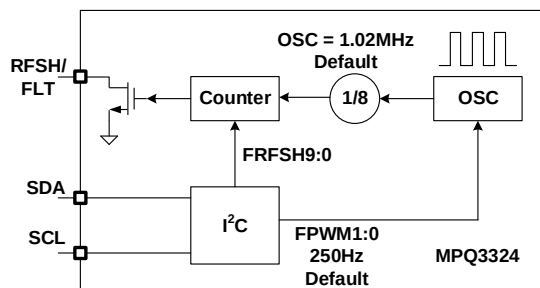


Figure 5: Refresh Frequency Generation

## LED Current Slew Rate Control

Changing the LED current's rising/falling slew rate during PWM dimming can optimize EMI performance. The LED current rising/falling slew rate is controlled by SLEW1:0. The slew rate can be set to the values listed below:

- SLEW1:0 = 00: no slew rate
- SLEW1:0 = 01: 5μs
- SLEW1:0 = 10: 10μs
- SLEW1:0 = 11: 20μs

## Protections

The MP3324 employs  $V_{\text{IN}}$  under-voltage lockout (UVLO), LED short protection, LED open-load protection, and thermal shutdown.

The RFSH/FLT pin is active low, open drain, and should be pulled high to an external voltage source. If a protection is triggered, the corresponding fault bit is set, and RFSH/FLT is pulled low.

In hiccup mode, the RFSH/FLT pin is pulled high once the fault condition is removed.

In latch-off mode, the RFSH/FLT pin is released if all of fault bits are read.

For LED open and short protection, hiccup mode or latch-up mode can be selected via the LATCH bit through the I<sup>2</sup>C.

If LATCH = 1, the MPQ3324 initiates latch-up mode if a fault is triggered. The fault channel stays off until  $V_{\text{IN}}$  or EN is turned off and reset.

If LATCH = 0, the MPQ3324 operates in hiccup mode. In this mode, the fault channel tries to conduct for 32μs to detect if the fault is cleared. This process is repeated every 1ms. RFSH/FLT is released if fault condition is removed.

### V<sub>IN</sub> Under-Voltage Lockout (UVLO)

If the input voltage drops to the V<sub>IN</sub> UVLO threshold, the IC stops working, and all I<sup>2</sup>C registers are reset.

### LED Open-Load Protection

If an LED open fault occurs, the LED<sub>x</sub> (e.g. x = 1, 2, ..., 8) voltage drops. If the LED<sub>x</sub> voltage drops below the protection threshold (about 100mV) for 4ms, LED open-load protection is triggered. Once this occurs, the fault channel turns off, the corresponding CH<sub>x</sub>O (x = 1, 2, ..., 8) open fault bit is set, and the RFSH/FLT pin is pulled low. The fault bit is reset when it is read, and the RFSH/FLT pin is pulled high.

### LED Short Protection

If an LED short condition occurs, the V<sub>IN</sub> - VLED<sub>x</sub> voltage drops. If the VLED<sub>x</sub> (e.g. x = 1, 2, ..., 8) voltage exceeds the voltage set by STH for 4ms, LED short protection is triggered. Once this occurs, the short channel turns off, the corresponding CH<sub>x</sub>S fault bit is set, and RFSH/FLT pulls low.

The LED short protection threshold is configured by STH1:0, and can be set to the following values:

- STH1:0 = 00: 2V
- STH1:0 = 01: 3V
- STH1:0 = 10: 4V
- STH1:0 = 11: 5V

The fault bit is reset when it is read, and the RFSH/FLT pin is pulled high.

### Over-Temperature Protection (OTP)

If the IC temperature exceeds 170°C, over-temperature protection (OTP) is triggered. All channels turn off, the RFSH/FLT pin is pulled low, and the FT\_OTP bit is set. If the temperature drops by 20°C, the IC recovers, all channels turn on, and the part resumes normal operation.

### I<sup>2</sup>C Interface Register

#### I<sup>2</sup>C Chip Address

The device's address is 0x30~0x39, and is configured by the ADDR resistor. The internal current source flows to the ADDR resistor, then the voltage of ADDR determines the I<sup>2</sup>C address. 10 different addresses can be configured through the ADDR resistor. Table 2 shows how the relationship between I<sup>2</sup>C address and resistor ratio the (R<sub>ADDR</sub> / R<sub>ISSET</sub>).

**Table 2: I<sup>2</sup>C Address Setting**

| R <sub>ADDR</sub> / R <sub>ISSET</sub> | I <sup>2</sup> C Address (A3, A2, A1, A0) |
|----------------------------------------|-------------------------------------------|
| <0.05                                  | 0000                                      |
| >0.05, <0.15                           | 0001                                      |
| >0.15, <0.25                           | 0010                                      |
| >0.25, <0.35                           | 0011                                      |
| >0.35, <0.45                           | 0100                                      |
| >0.45, <0.55                           | 0101                                      |
| >0.55, <0.65                           | 0110                                      |
| >0.65, <0.75                           | 0111                                      |
| >0.75, <0.85                           | 1000                                      |
| >0.85, <0.95                           | 1001                                      |

At start-up, the IC checks the I<sup>2</sup>C address first. This address remains the same during normal operation, unless the IC's power is reset.

After the start condition, the I<sup>2</sup>C-compatible master sends a 7-bit address followed by an 8th read (1) or write (0) bit. The 8th bit indicates the register address to/from which the data will be written/read (see Figure 6).

|   |   |   |    |    |    |    |     |
|---|---|---|----|----|----|----|-----|
| 0 | 1 | 1 | A3 | A2 | A1 | A0 | R/W |
|---|---|---|----|----|----|----|-----|

**Figure 6: The I<sup>2</sup>C-Compatible Device Address**

To avoid a glitch during normal operation, ensure that the following conditions are met:

- Change the FPWM1:0 value only when the EN bit is set to 0.
- Write the FPWM register and wait for a 10μs delay before writing other registers.

## REGISTER MAP

| Add | Default | D7        | D6    | D5       | D4    | D3       | D2     | D1       | D0    |
|-----|---------|-----------|-------|----------|-------|----------|--------|----------|-------|
| 00H | 01      | RESERVED  |       |          |       |          |        | FPWM 1:0 |       |
| 01H | 00      | FLTEN     | LATCH | STH1:0   |       | SLEW1:0  |        | PS_EN    | EN    |
| 02H | 01      | RESERVED  |       |          |       |          | FT_OTP | FRFSH1:0 |       |
| 03H | 6A      | FRFSH 9:2 |       |          |       |          |        |          |       |
| 04H | FF      | CH8EN     | CH8EN | CH7EN    | CH7EN | CH6EN    | CH6EN  | CH5EN    | CH5EN |
| 05H | FF      | CH4EN     | CH4EN | CH3EN    | CH3EN | CH2EN    | CH2EN  | CH1EN    | CH1EN |
| 06H | 00      | RESERVED  | CH8O  | RESERVED | CH7O  | RESERVED | CH6O   | RESERVED | CH5O  |
| 07H | 00      | RESERVED  | CH4O  | RESERVED | CH3O  | RESERVED | CH2O   | RESERVED | CH1O  |
| 08H | 00      | RESERVED  | CH8S  | RESERVED | CH7S  | RESERVED | CH6S   | RESERVED | CH5S  |
| 09H | 00      | RESERVED  | CH4S  | RESERVED | CH3S  | RESERVED | CH2S   | RESERVED | CH1S  |
| 0AH | 3F      | RESERVED  |       | ICH1 5:0 |       |          |        |          |       |
| 0BH | 0F      | RESERVED  |       |          |       | PWM1 3:0 |        |          |       |
| 0CH | FF      | PWM1 11:4 |       |          |       |          |        |          |       |
| 0DH | 3F      | RESERVED  |       | ICH1 5:0 |       |          |        |          |       |
| 0EH | 0F      | RESERVED  |       |          |       | PWM1 3:0 |        |          |       |
| 0FH | FF      | PWM1 11:4 |       |          |       |          |        |          |       |
| 10H | 3F      | RESERVED  |       | ICH2 5:0 |       |          |        |          |       |
| 11H | 0F      | RESERVED  |       |          |       | PWM2 3:0 |        |          |       |
| 12H | FF      | PWM2 11:4 |       |          |       |          |        |          |       |
| 13H | 3F      | RESERVED  |       | ICH2 5:0 |       |          |        |          |       |
| 14H | 0F      | RESERVED  |       |          |       | PWM2 3:0 |        |          |       |
| 15H | FF      | PWM2 11:4 |       |          |       |          |        |          |       |
| 16H | 3F      | RESERVED  |       | ICH3 5:0 |       |          |        |          |       |
| 17H | 0F      | RESERVED  |       |          |       | PWM3 3:0 |        |          |       |
| 18H | FF      | PWM3 11:4 |       |          |       |          |        |          |       |
| 19H | 3F      | RESERVED  |       | ICH3 5:0 |       |          |        |          |       |
| 1AH | 0F      | RESERVED  |       |          |       | PWM3 3:0 |        |          |       |
| 1BH | FF      | PWM3 11:4 |       |          |       |          |        |          |       |

## REGISTER MAP (continued)

| Add | Default | D7        | D6 | D5       | D4 | D3       | D2 | D1 | D0 |
|-----|---------|-----------|----|----------|----|----------|----|----|----|
| 1CH | 3F      | RESERVED  |    | ICH4 5:0 |    |          |    |    |    |
| 1DH | 0F      | RESERVED  |    |          |    | PWM4 3:0 |    |    |    |
| 1EH | FF      | PWM4 11:4 |    |          |    |          |    |    |    |
| 1FH | 3F      | RESERVED  |    | ICH4 5:0 |    |          |    |    |    |
| 20H | 0F      | RESERVED  |    |          |    | PWM4 3:0 |    |    |    |
| 21H | FF      | PWM4 11:4 |    |          |    |          |    |    |    |
| 22H | 3F      | RESERVED  |    | ICH5 5:0 |    |          |    |    |    |
| 23H | 0F      | RESERVED  |    |          |    | PWM5 3:0 |    |    |    |
| 24H | FF      | PWM5 11:4 |    |          |    |          |    |    |    |
| 25H | 3F      | RESERVED  |    | ICH5 5:0 |    |          |    |    |    |
| 26H | 0F      | RESERVED  |    |          |    | PWM5 3:0 |    |    |    |
| 27H | FF      | PWM5 11:4 |    |          |    |          |    |    |    |
| 28H | 3F      | RESERVED  |    | ICH6 5:0 |    |          |    |    |    |
| 29H | 0F      | RESERVED  |    |          |    | PWM6 3:0 |    |    |    |
| 2AH | FF      | PWM6 11:4 |    |          |    |          |    |    |    |
| 2BH | 3F      | RESERVED  |    | ICH6 5:0 |    |          |    |    |    |
| 2CH | 0F      | RESERVED  |    |          |    | PWM6 3:0 |    |    |    |
| 2DH | FF      | PWM6 11:4 |    |          |    |          |    |    |    |
| 2EH | 3F      | RESERVED  |    | ICH7 5:0 |    |          |    |    |    |
| 2FH | 0F      | RESERVED  |    |          |    | PWM7 3:0 |    |    |    |
| 30H | FF      | PWM7 11:4 |    |          |    |          |    |    |    |
| 31H | 3F      | RESERVED  |    | ICH7 5:0 |    |          |    |    |    |
| 32H | 0F      | RESERVED  |    |          |    | PWM7 3:0 |    |    |    |
| 33H | FF      | PWM7 11:4 |    |          |    |          |    |    |    |
| 34H | 3F      | RESERVED  |    | ICH8 5:0 |    |          |    |    |    |
| 35H | 0F      | RESERVED  |    |          |    | PWM8 3:0 |    |    |    |
| 36H | FF      | PWM8 11:4 |    |          |    |          |    |    |    |
| 37H | 3F      | RESERVED  |    | ICH8 5:0 |    |          |    |    |    |
| 38H | 0F      | RESERVED  |    |          |    | PWM8 3:0 |    |    |    |
| 39H | FF      | PWM8 11:4 |    |          |    |          |    |    |    |

## PWM Dimming Frequency Setting

| Addr: 0x00 |          |        |         |                                                                                                                                                                                                                                                                                                                                                                                                           |
|------------|----------|--------|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Bit        | Bit Name | Access | Default | Description                                                                                                                                                                                                                                                                                                                                                                                               |
| 7:2        | RESERVED | R      | 000000  | Reserved.                                                                                                                                                                                                                                                                                                                                                                                                 |
| 1:0        | FPWM     | R/W    | 01      | <p>Sets the PWM dimming frequency.</p> <p>00: 220Hz<br/>01: 250Hz<br/>10: 280Hz<br/>11: 330Hz</p> <p>To avoid a glitch during normal operation, ensure that the following conditions are met:</p> <ul style="list-style-type: none"> <li>Change the FPWM1:0 value only when the EN bit is set to 0.</li> <li>Write the FPWM register and wait for a 10μs delay before writing other registers.</li> </ul> |

## Control

| Addr: 0x01 |          |        |         |                                                                                                                                                                                  |
|------------|----------|--------|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Bit        | Bit Name | Access | Default | Description                                                                                                                                                                      |
| 7          | FLTEN    | R/W    | 0       | <p>Enables the RFSH/FLT pin's fault indication.</p> <p>0: Disabled. The RFSH/FLT pin refreshes the signal output<br/>1: Enabled. The RFSH/FLT pin indicates if faults occurs</p> |
| 6          | LATCH    | R/W    | 1       | <p>Enables latch-off mode if a fault occurs.</p> <p>0: Disabled. Faults trigger hiccup mode<br/>1: Enabled. Faults trigger latch-up mode</p>                                     |
| 5:4        | S_TH1:0  | R/W    | 00      | <p>Sets the LED short protection threshold.</p> <p>00: 2V<br/>01: 3V<br/>10: 4V<br/>11: 5V</p>                                                                                   |
| 3:2        | SLEW1:0  | R/W    | 00      | <p>Sets the LED current slew rate.</p> <p>00: No slew rate<br/>01: 5μs<br/>10: 10μs<br/>11: 20μs</p>                                                                             |
| 1          | PS_EN    | R/W    | 0       | <p>Enables the phase shift function.</p> <p>0: Disabled<br/>1: Enabled. The rising edge of channel x + 1 occurs 80μs after channel x (e.g. x = 1, 2, ..., 7).</p>                |
| 0          | EN       | R/W    | 0       | <p>Enables the IC.</p> <p>0: IC disabled<br/>1: IC enabled</p>                                                                                                                   |



## Refresh Frequency Setting and OTP Fault

| Addr: 0x02 |          |        |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|------------|----------|--------|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Bit        | Bit Name | Access | Default | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| 7:3        | RESERVED | R      | 0       | Reserved.                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| 2          | FT_OTP   | R      | 0       | Indicates if over-temperature protection (OTP) occurs.<br>0: No OTP fault has occurred<br>1: An OTP fault has occurred                                                                                                                                                                                                                                                                                                                                         |
| 1:0        | FRFSH1:0 | R/W    | 01      | Sets the 2LSB of the refresh frequency.<br>FRFSH 9:0 = 0x000: output a high-level voltage<br>FRFSH 9:0 > 0: the frequency of the output pulse can be calculated with the following equation:<br>$f_{\text{REFRESH}} = \frac{127500}{\text{FRFSH}} \times \frac{f_{\text{PWM}}}{250} \text{ (Hz)}$<br>All numbers in the equation have a decimal base. The refresh frequency does not change until the 8MSB is written. The default refresh frequency is 300Hz. |

## Refresh Frequency Setting

| Addr: 0x03 |          |        |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|------------|----------|--------|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Bit        | Bit Name | Access | Default | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| 7:0        | FRFSH9:2 | R/W    | 6A      | Sets the 8MSB of the refresh frequency.<br>FRFSH 9:0 = 0x000: output high-level voltage<br>FRFSH 9:0 > 0: the frequency of the output pulse can be calculated with the following equation:<br>$f_{\text{refresh}} = \frac{127500}{\text{FRFSH}} \times \frac{f_{\text{PWM}}}{250} \text{ (Hz)}$<br>All numbers in the equation have a decimal base. The refresh frequency does not change until the 8MSB is written. The default refresh frequency is 300Hz. |

## Channel Enable (Channel 5–8)

| Addr: 0x04 |          |        |         |                                                   |
|------------|----------|--------|---------|---------------------------------------------------|
| Bit        | Bit Name | Access | Default | Description                                       |
| 7:6        | CH8EN    | R/W    | 11      | Enables channel 8.<br>00: Disabled<br>11: Enabled |
| 5:4        | CH7EN    | R/W    | 11      | Enables channel 7.<br>00: Disabled<br>11: Enabled |
| 3:2        | CH6EN    | R/W    | 11      | Enables channel 6.<br>00: Disabled<br>11: Enabled |

|     |       |     |    |                                                   |
|-----|-------|-----|----|---------------------------------------------------|
| 1:0 | CH5EN | R/W | 11 | Enables channel 5.<br>00: Disabled<br>11: Enabled |
|-----|-------|-----|----|---------------------------------------------------|

#### Channel Enable (Channels 1–4)

| Addr: 0x05 |          |        |         |                                                   |
|------------|----------|--------|---------|---------------------------------------------------|
| Bit        | Bit Name | Access | Default | Description                                       |
| 7:6        | CH4EN    | R/W    | 11      | Enables channel 4.<br>00: Disabled<br>11: Enabled |
| 5:4        | CH3EN    | R/W    | 11      | Enables channel 3.<br>00: Disabled<br>11: Enabled |
| 3:2        | CH2EN    | R/W    | 11      | Enables channel 2.<br>00: Disabled<br>11: Enabled |
| 1:0        | CH1EN    | R/W    | 11      | Enables channel 1.<br>00: Disabled<br>11: Enabled |

#### Channel Open Fault (Channels 5–8)

| Addr: 0x06 |          |        |         |                                                                                                                                                         |
|------------|----------|--------|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| Bit        | Bit Name | Access | Default | Description                                                                                                                                             |
| 7          | RESERVED | -      | -       | Reserved.                                                                                                                                               |
| 6          | CH8O     | R      | 0       | Channel 8 open protection fault flag.<br>0: No open protection fault has occurred on channel 8<br>1: An open protection fault has occurred on channel 8 |
| 5          | RESERVED | -      | -       | Reserved.                                                                                                                                               |
| 4          | CH7O     | R      | 0       | Channel 7 open protection fault flag.<br>0: No open protection fault has occurred on channel 7<br>1: An open protection fault has occurred on channel 7 |
| 3          | RESERVED | -      | -       | Reserved.                                                                                                                                               |
| 2          | CH6O     | R      | 0       | Channel 6 open protection fault flag.<br>0: No open protection fault has occurred on channel 6<br>1: An open protection fault has occurred on channel 6 |
| 1          | RESERVED | -      | -       | Reserved.                                                                                                                                               |
| 0          | CH5O     | R      | 0       | Channel 5 open protection fault flag.<br>0: No open protection fault has occurred on channel 5<br>1: An open protection fault has occurred on channel 5 |

### Channel Open Fault (Channels 1–4)

| Addr: 0x07 |          |        |         |                                                                                                                                                         |
|------------|----------|--------|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| Bit        | Bit Name | Access | Default | Description                                                                                                                                             |
| 7          | RESERVED | -      | -       | Reserved.                                                                                                                                               |
| 6          | CH4O     | R      | 0       | Channel 4 open protection fault flag.<br>0: No open protection fault has occurred on channel 4<br>1: An open protection fault has occurred on channel 4 |
| 5          | RESERVED | -      | -       | Reserved.                                                                                                                                               |
| 4          | CH3O     | R      | 0       | Channel 3 open protection fault flag.<br>0: No open protection fault has occurred on channel 3<br>1: An open protection fault has occurred on channel 3 |
| 3          | RESERVED | -      | -       | Reserved.                                                                                                                                               |
| 2          | CH2O     | R      | 0       | Channel 2 open protection fault flag.<br>0: No open protection fault has occurred on channel 2<br>1: An open protection fault has occurred on channel 2 |
| 1          | RESERVED | -      | -       | Reserved.                                                                                                                                               |
| 0          | CH1O     | R      | 0       | Channel 1 open protection fault flag<br>0: No open protection fault has occurred on channel 1<br>1: An open protection fault has occurred on channel 1  |

### Channel Short Fault (Channel 5-8)

| Addr: 0x08 |          |        |         |                                                                                                                                                          |
|------------|----------|--------|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| Bit        | Bit Name | Access | Default | Description                                                                                                                                              |
| 7          | RESERVED | -      | -       | Reserved.                                                                                                                                                |
| 6          | CH8S     | R      | 0       | Channel 8 short protection fault flag<br>0: No short protection fault has occurred on channel 8<br>1: A short protection fault has occurred on channel 8 |
| 5          | RESERVED | -      | -       | Reserved.                                                                                                                                                |
| 4          | CH7S     | R      | 0       | Channel 7 short protection fault flag<br>0: No short protection fault has occurred on channel 7<br>1: A short protection fault has occurred on channel 7 |
| 3          | RESERVED | -      | -       | Reserved.                                                                                                                                                |
| 2          | CH6S     | R      | 0       | Channel 6 short protection fault flag<br>0: No short protection fault has occurred on channel 6<br>1: A short protection fault has occurred on channel 6 |
| 1          | RESERVED | -      | -       | Reserved.                                                                                                                                                |
| 0          | CH5S     | R      | 0       | Channel 5 short protection fault flag<br>0: No short protection fault has occurred on channel 5<br>1: A short protection fault has occurred on channel 5 |

### Channel Short Fault (Channel 1-4)

| Addr: 0x09 |          |        |         |                                                                                                                                                          |
|------------|----------|--------|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| Bit        | Bit Name | Access | Default | Description                                                                                                                                              |
| 7          | RESERVED | -      | -       | Reserved.                                                                                                                                                |
| 6          | CH4S     | R      | 0       | Channel 4 short protection fault flag<br>0: No short protection fault has occurred on channel 4<br>1: A short protection fault has occurred on channel 4 |
| 5          | RESERVED | -      | -       | Reserved.                                                                                                                                                |
| 4          | CH3S     | R      | 0       | Channel 3 short protection fault flag<br>0: No short protection fault has occurred on channel 3<br>1: A short protection fault has occurred on channel 3 |
| 3          | RESERVED | -      | -       | Reserved.                                                                                                                                                |
| 2          | CH2S     | R      | 0       | Channel 2 short protection fault flag<br>0: No short protection fault has occurred on channel 2<br>1: A short protection fault has occurred on channel 2 |
| 1          | RESERVED | -      | -       | Reserved.                                                                                                                                                |
| 0          | CH1S     | R      | 0       | Channel 1 short protection fault flag<br>0: No short protection fault has occurred on channel 1<br>1: A short protection fault has occurred on channel 1 |

### Channel 1 LED Current Setting

| Addr: 0x0A~0x0D |          |        |         |                                                                                                                                              |
|-----------------|----------|--------|---------|----------------------------------------------------------------------------------------------------------------------------------------------|
| Bit             | Bit Name | Access | Default | Description                                                                                                                                  |
| 7:6             | Reserved | R      | 00      | Reserved.                                                                                                                                    |
| 5:0             | ICH1 5:0 | R/W    | 111111  | Sets the channel 1 LED current for analog dimming, calculated with the following equation:<br>$I_{LED} = \frac{\text{Code}}{63} \times ISET$ |

### Channel 1 PWM Dimming Duty Setting (LSB)

| Addr: 0x0B~0x0E |          |        |         |                                                                                                                   |
|-----------------|----------|--------|---------|-------------------------------------------------------------------------------------------------------------------|
| Bit             | Bit Name | Access | Default | Description                                                                                                       |
| 7:4             | Reserved | R      | 0000    | Reserved.                                                                                                         |
| 3:0             | PWM1 3:0 | R/W    | 1111    | Sets the 4LSB for the channel 1 LED current PWM dimming duty. The dimming duty only changes once 8MSB is written. |

### Channel 1 PWM Dimming Duty Setting (MSB)

| Addr: 0x0C~0F |           |        |          |                                                                                                                   |
|---------------|-----------|--------|----------|-------------------------------------------------------------------------------------------------------------------|
| Bit           | Bit Name  | Access | Default  | Description                                                                                                       |
| 7:0           | PWM1 11:4 | R/W    | 11111111 | Sets the 8MSB for the channel 1 LED current PWM dimming duty. The dimming duty only changes once 8MSB is written. |

### Channel 2 LED Current Setting

| Addr: 0x10~13 |          |        |         |                                                                                                                                       |
|---------------|----------|--------|---------|---------------------------------------------------------------------------------------------------------------------------------------|
| Bit           | Bit Name | Access | Default | Description                                                                                                                           |
| 7:6           | Reserved | R      | 00      | Reserved.                                                                                                                             |
| 5:0           | ICH2 5:0 | R/W    | 111111  | Sets the channel 2 LED current for analog dimming, calculated with the following equation:<br>$I_{LED} = \frac{Code}{63} \times ISET$ |

### Channel 2 PWM Dimming Duty Setting (LSB)

| Addr: 0x11~14 |          |        |         |                                                                                                                   |
|---------------|----------|--------|---------|-------------------------------------------------------------------------------------------------------------------|
| Bit           | Bit Name | Access | Default | Description                                                                                                       |
| 7:4           | Reserved | R      | 0000    | Reserved.                                                                                                         |
| 3:0           | PWM2 3:0 | R/W    | 1111    | Sets the 4LSB for the channel 2 LED current PWM dimming duty. The dimming duty only changes once 8MSB is written. |

### Channel 2 PWM Dimming Duty Setting (MSB)

| Addr: 0x12~15 |           |        |          |                                                                                                                   |
|---------------|-----------|--------|----------|-------------------------------------------------------------------------------------------------------------------|
| Bit           | Bit Name  | Access | Default  | Description                                                                                                       |
| 7:0           | PWM2 11:4 | R/W    | 11111111 | Sets the 8MSB for the channel 2 LED current PWM dimming duty. The dimming duty only changes once 8MSB is written. |

### Channel 3 LED Current Setting

| Addr: 0x16~19 |          |        |         |                                                                                                                                       |
|---------------|----------|--------|---------|---------------------------------------------------------------------------------------------------------------------------------------|
| Bit           | Bit Name | Access | Default | Description                                                                                                                           |
| 7:6           | Reserved | R      | 00      | Reserved.                                                                                                                             |
| 5:0           | ICH3 5:0 | R/W    | 111111  | Sets the channel 3 LED current for analog dimming, calculated with the following equation:<br>$I_{LED} = \frac{Code}{63} \times ISET$ |

### Channel 3 PWM Dimming Duty Setting (LSB)

| Addr: 0x17~1A |          |        |         |                                                                                                                   |
|---------------|----------|--------|---------|-------------------------------------------------------------------------------------------------------------------|
| Bit           | Bit Name | Access | Default | Description                                                                                                       |
| 7:4           | Reserved | R      | 0000    | Reserved.                                                                                                         |
| 3:0           | PWM3 3:0 | R/W    | 1111    | Sets the 4LSB for the channel 3 LED current PWM dimming duty. The dimming duty only changes once 8MSB is written. |

### Channel 3 PWM Dimming Duty Setting (MSB)

| Addr: 0x18~1B |           |        |          |                                                                                                                   |
|---------------|-----------|--------|----------|-------------------------------------------------------------------------------------------------------------------|
| Bit           | Bit Name  | Access | Default  | Description                                                                                                       |
| 7:0           | PWM3 11:4 | R/W    | 11111111 | Sets the 8MSB for the channel 3 LED current PWM dimming duty. The dimming duty only changes once 8MSB is written. |

### Channel 4 LED Current Setting

| Addr: 0x1C~1F |          |        |         |                                                                                                                                       |
|---------------|----------|--------|---------|---------------------------------------------------------------------------------------------------------------------------------------|
| Bit           | Bit Name | Access | Default | Description                                                                                                                           |
| 7:6           | Reserved | R      | 00      | Reserved.                                                                                                                             |
| 5:0           | ICH4 5:0 | R/W    | 111111  | Sets the channel 4 LED current for analog dimming, calculated with the following equation:<br>$I_{LED} = \frac{Code}{63} \times ISET$ |

### Channel 4 PWM Dimming Duty Setting (LSB)

| Addr: 0x1D~20 |          |        |         |                                                                                                                   |
|---------------|----------|--------|---------|-------------------------------------------------------------------------------------------------------------------|
| Bit           | Bit Name | Access | Default | Description                                                                                                       |
| 7:4           | Reserved | R      | 0000    | Reserved.                                                                                                         |
| 3:0           | PWM4 3:0 | R/W    | 1111    | Sets the 4LSB for the channel 4 LED current PWM dimming duty. The dimming duty only changes once 8MSB is written. |

### Channel 4 PWM Dimming Duty Setting (MSB)

| Addr: 0x1E~21 |           |        |          |                                                                                                                   |
|---------------|-----------|--------|----------|-------------------------------------------------------------------------------------------------------------------|
| Bit           | Bit Name  | Access | Default  | Description                                                                                                       |
| 7:0           | PWM4 11:4 | R/W    | 11111111 | Sets the 8MSB for the channel 4 LED current PWM dimming duty. The dimming duty only changes once 8MSB is written. |

### Channel 5 LED Current Setting

| Addr: 0x22~25 |          |        |         |                                                                                                                                       |
|---------------|----------|--------|---------|---------------------------------------------------------------------------------------------------------------------------------------|
| Bit           | Bit Name | Access | Default | Description                                                                                                                           |
| 7:6           | Reserved | R      | 00      | Reserved                                                                                                                              |
| 5:0           | ICH5 5:0 | R/W    | 111111  | Sets the channel 5 LED current for analog dimming, calculated with the following equation:<br>$I_{LED} = \frac{Code}{63} \times ISET$ |

### Channel 5 PWM Dimming Duty Setting (LSB)

| Addr: 0x23~26 |          |        |         |                                                                                                                   |
|---------------|----------|--------|---------|-------------------------------------------------------------------------------------------------------------------|
| Bit           | Bit Name | Access | Default | Description                                                                                                       |
| 7:4           | Reserved | R      | 0000    | Reserved                                                                                                          |
| 3:0           | PWM5 3:0 | R/W    | 1111    | Sets the 4LSB for the channel 5 LED current PWM dimming duty. The dimming duty only changes once 8MSB is written. |

### Channel 5 PWM Dimming Duty Setting (MSB)

| Addr: 0x24~27 |           |        |          |                                                                                                                   |
|---------------|-----------|--------|----------|-------------------------------------------------------------------------------------------------------------------|
| Bit           | Bit Name  | Access | Default  | Description                                                                                                       |
| 7:0           | PWM5 11:4 | R/W    | 11111111 | Sets the 8MSB for the channel 5 LED current PWM dimming duty. The dimming duty only changes once 8MSB is written. |

### Channel 6 LED Current Setting

| Addr: 0x28~2B |          |        |         |                                                                                                                                       |
|---------------|----------|--------|---------|---------------------------------------------------------------------------------------------------------------------------------------|
| Bit           | Bit Name | Access | Default | Description                                                                                                                           |
| 7:6           | Reserved | R      | 00      | Reserved                                                                                                                              |
| 5:0           | ICH6 5:0 | R/W    | 111111  | Sets the channel 6 LED current for analog dimming, calculated with the following equation:<br>$I_{LED} = \frac{Code}{63} \times ISET$ |

### Channel 6 PWM Dimming Duty Setting (LSB)

| Addr: 0x29~2C |          |        |         |                                                                                                                   |
|---------------|----------|--------|---------|-------------------------------------------------------------------------------------------------------------------|
| Bit           | Bit Name | Access | Default | Description                                                                                                       |
| 7:4           | Reserved | R      | 0000    | Reserved                                                                                                          |
| 3:0           | PWM6 3:0 | R/W    | 1111    | Sets the 4LSB for the channel 6 LED current PWM dimming duty. The dimming duty only changes once 8MSB is written. |

### Channel 6 PWM Dimming Duty Setting (MSB)

| Addr: 0x2A~2D |           |        |          |                                                                                                                   |
|---------------|-----------|--------|----------|-------------------------------------------------------------------------------------------------------------------|
| Bit           | Bit Name  | Access | Default  | Description                                                                                                       |
| 7:0           | PWM6 11:4 | R/W    | 11111111 | Sets the 8MSB for the channel 6 LED current PWM dimming duty. The dimming duty only changes once 8MSB is written. |

### Channel 7 LED Current Setting

| Addr: 0x2E~31 |          |        |         |                                                                                                                                       |
|---------------|----------|--------|---------|---------------------------------------------------------------------------------------------------------------------------------------|
| Bit           | Bit Name | Access | Default | Description                                                                                                                           |
| 7:6           | Reserved | R      | 00      | Reserved                                                                                                                              |
| 5:0           | ICH7 5:0 | R/W    | 111111  | Sets the channel 7 LED current for analog dimming, calculated with the following equation:<br>$I_{LED} = \frac{Code}{63} \times ISET$ |

### Channel 7 PWM Dimming Duty Setting (LSB)

| Addr: 0x2F~32 |          |        |         |                                                                                                                   |
|---------------|----------|--------|---------|-------------------------------------------------------------------------------------------------------------------|
| Bit           | Bit Name | Access | Default | Description                                                                                                       |
| 7:4           | Reserved | R      | 0000    | Reserved                                                                                                          |
| 3:0           | PWM7 3:0 | R/W    | 1111    | Sets the 4LSB for the channel 7 LED current PWM dimming duty. The dimming duty only changes once 8MSB is written. |

### Channel 7 PWM Dimming Duty Setting (MSB)

| Addr: 0x30~33 |           |        |          |                                                                                                                   |
|---------------|-----------|--------|----------|-------------------------------------------------------------------------------------------------------------------|
| Bit           | Bit Name  | Access | Default  | Description                                                                                                       |
| 7:0           | PWM7 11:4 | R/W    | 11111111 | Sets the 8MSB for the channel 7 LED current PWM dimming duty. The dimming duty only changes once 8MSB is written. |

### Channel 8 LED Current Setting

| Addr: 0x34~37 |          |        |         |                                                                                                                                                 |
|---------------|----------|--------|---------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| Bit           | Bit Name | Access | Default | Description                                                                                                                                     |
| 7:6           | Reserved | R      | 00      | Reserved                                                                                                                                        |
| 5:0           | ICH8 5:0 | R/W    | 111111  | Sets the channel 8 LED current for analog dimming, calculated with the following equation:<br>$I_{LED} = \frac{\text{Code}}{63} \times I_{SET}$ |

### Channel 8 PWM Dimming Duty Setting Register (LSB)

| Addr: 0x35~38 |          |        |         |                                                                                                                   |
|---------------|----------|--------|---------|-------------------------------------------------------------------------------------------------------------------|
| Bit           | Bit Name | Access | Default | Description                                                                                                       |
| 7:4           | Reserved | R      | 0000    | Reserved                                                                                                          |
| 3:0           | PWM8 3:0 | R/W    | 1111    | Sets the 4LSB for the channel 8 LED current PWM dimming duty. The dimming duty only changes once 8MSB is written. |

### Channel 8 PWM Dimming Duty Setting Register (MSB)

| Addr: 0x36~39 |           |        |          |                                                                                                                   |
|---------------|-----------|--------|----------|-------------------------------------------------------------------------------------------------------------------|
| Bit           | Bit Name  | Access | Default  | Description                                                                                                       |
| 7:0           | PWM8 11:4 | R/W    | 11111111 | Sets the 8MSB for the channel 8 LED current PWM dimming duty. The dimming duty only changes once 8MSB is written. |



## APPLICATION INFORMATION

### LED Current Setting

Connect a resistor from the ISET pin to GND to set the LED current for all 8 channels. The LED current ( $I_{LED}$ ) can be calculated with Equation (5):

$$I_{LED} (mA) = \frac{500}{R_{ISET} (k\Omega)} \quad (5)$$

For a maximum  $I_{LED}$  (about 100mA), ensure that  $V_{IN} \geq 4.5V$  to power the IC.

### PCB Layout Guidelines

The traces from the LED anode to the LEDx pins must be wide enough to support the set current (up to 100mA) (see Figure 6).

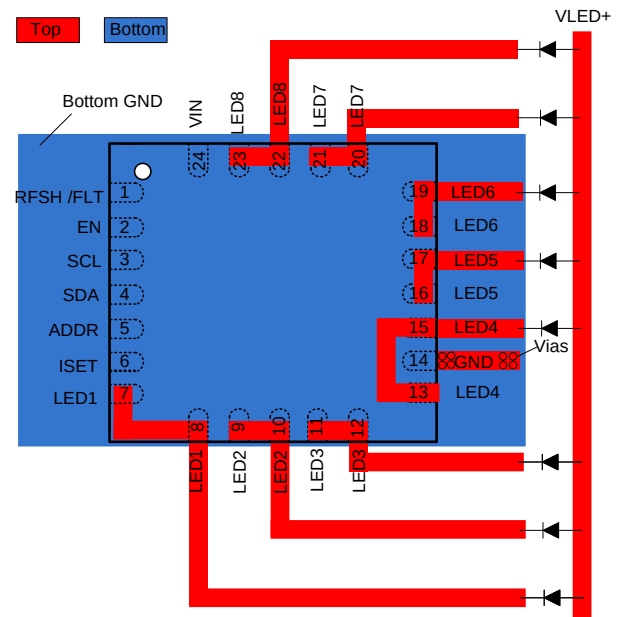


Figure 6: Recommended PCB Layout

## TYPICAL APPLICATION CIRCUITS

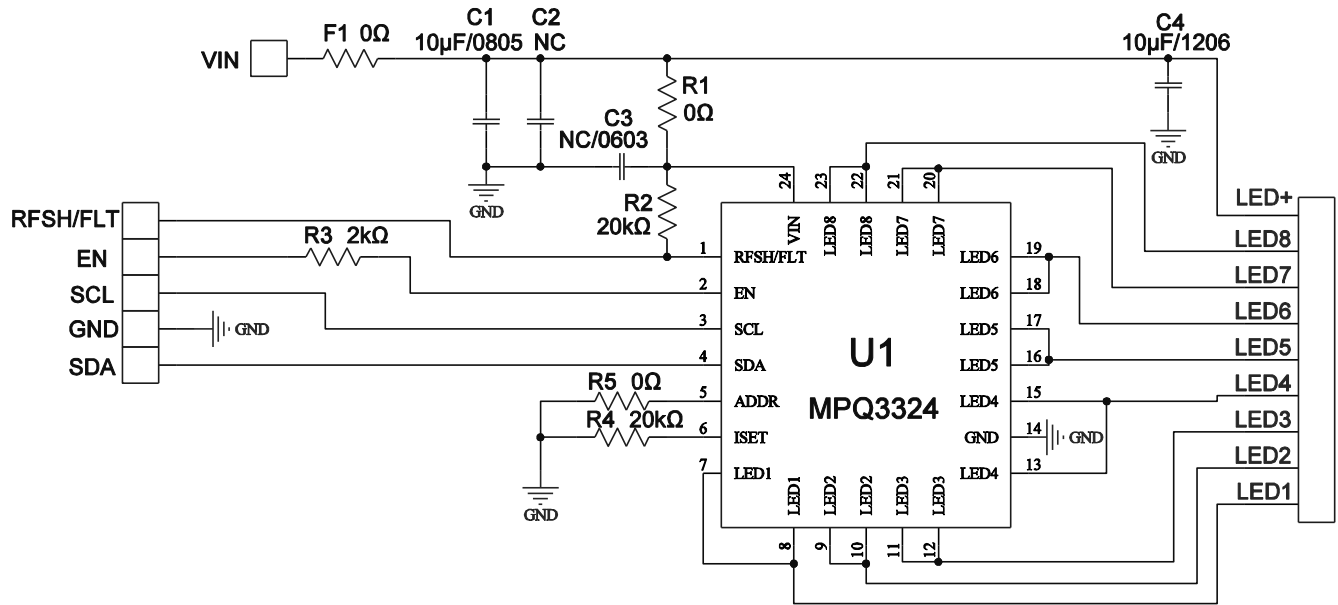


Figure 7: Typical Application Circuit


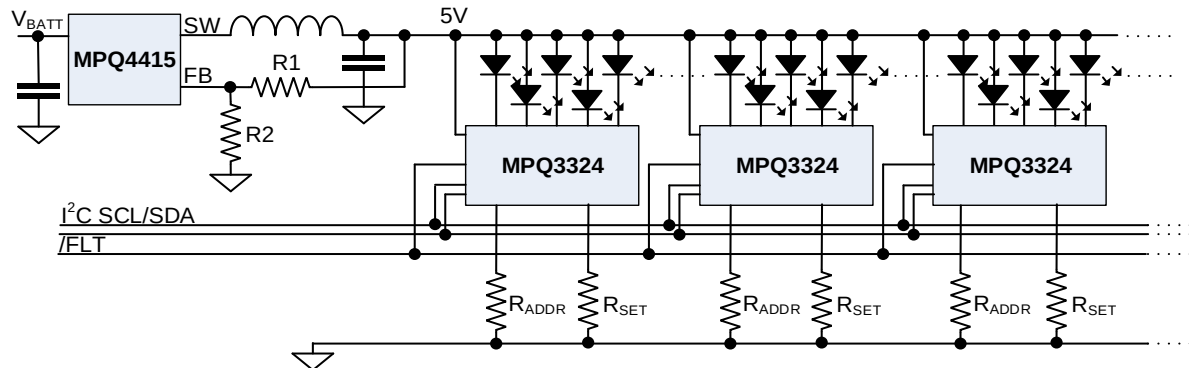



Figure 8: Typical System Application Circuit

# PACKAGE INFORMATION


## QFN-24 (4mmx4mm) Wettable Flank

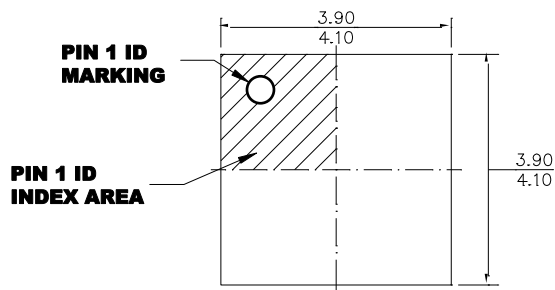


**TOP VIEW**

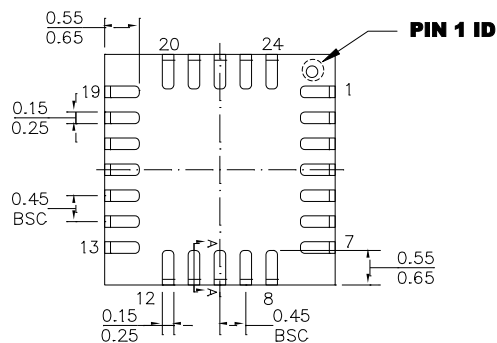


**BOTTOM VIEW**



**SIDE VIEW**



**SECTION A-A**

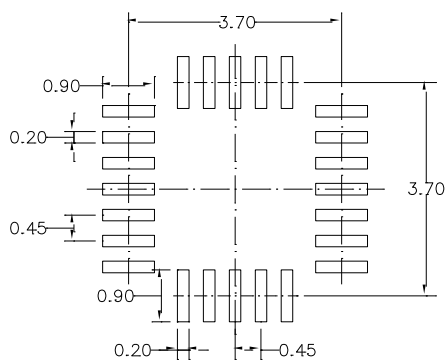


**RECOMMENDED LAND PATTERN**

### NOTE:

- 1) THE LEAD SIDE IS WETTABLE.
- 2) ALL DIMENSIONS ARE IN MILLIMETERS.
- 3) LEAD COPLANARITY SHALL BE 0.08 MILLIMETERS MAX.
- 4) JEDEC REFERENCE IS MO-220.
- 5) DRAWING IS NOT TO SCALE.

## CARRIER INFORMATION

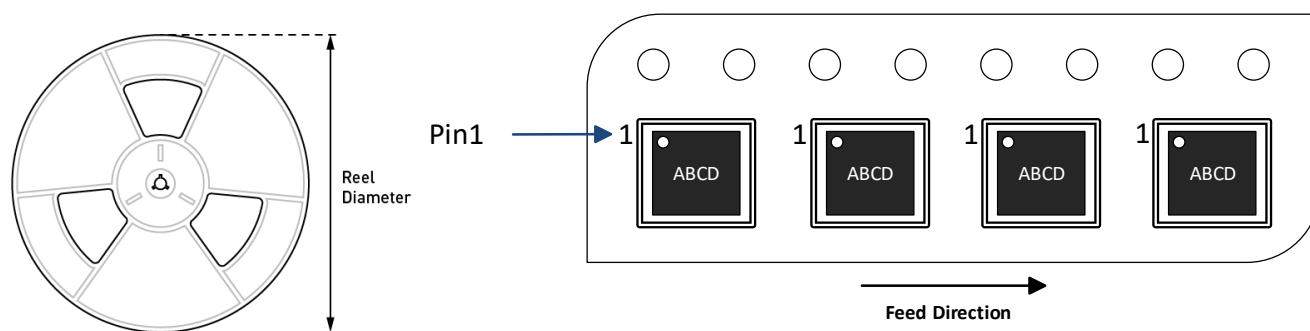

| Part Number     | Package Description | Quantity/ Reel | Quantity/ Tray | Quantity/ Tube | Reel Diameter | Carrier Tape Width | Carrier Tape Pitch |
|-----------------|---------------------|----------------|----------------|----------------|---------------|--------------------|--------------------|
| MPQ3324GRE-AEC1 | QFN-24 (4mmx4mm)    | 5000           | N/A            | N/A            | 13in          | 12mm               | 8mm                |

## REVISION HISTORY

| Revision # | Revision Date | Description     | Pages Updated |
|------------|---------------|-----------------|---------------|
| 1.0        | 2/18/2021     | Initial Release | -             |

**Notice:** The information in this document is subject to change without notice. Please contact MPS for current specifications. Users should warrant and guarantee that third-party Intellectual Property rights are not infringed upon when integrating MPS products into any application. MPS will not assume any legal responsibility for any said applications.